


EPA3317





- 2000 Vrms Minimum Isolation •
- Through Hole Package •

Electrical Parameters @ 25° C

OCL (Primary) (mH Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance (μH Max.)	DCR (Ω ± 25%)	
			Pri.	Sec.
22	100	8-40	2.5	5.8
Pins 1-4 with Pins 2-3 Shorted	Pri. Wdgs to Sec. Wdgs	Pins 1-4 with Pins 5,6,7,8 Shorted	Pins 1-4 with Pins 2-3 Shorted	Pins 8-5 with Pins 7-6 Shorted

- Primary Distributed Capacitance : 110 pF Max. •

Schematic

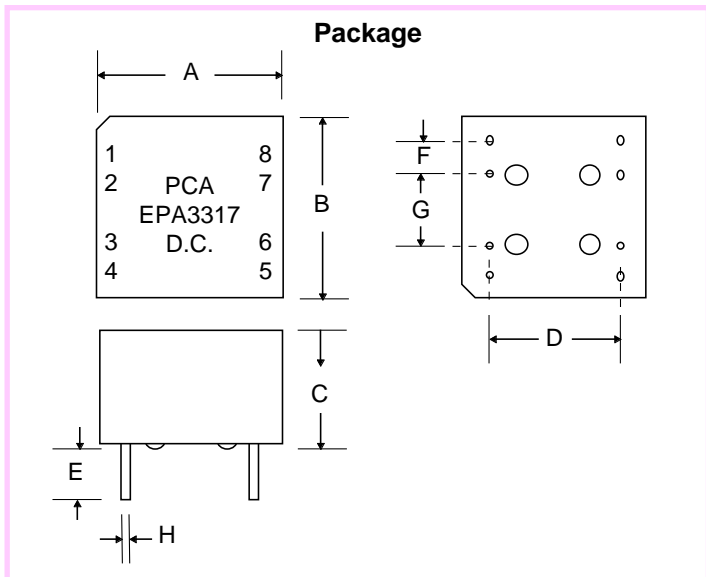

Dimensions

Dim.	(Inches)			(millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.540	.560	.550	13.71	14.22	13.97
B	.540	.560	.550	13.71	14.22	13.97
C	.380	.400	.390	9.65	10.16	9.91
D	---	---	.400	---	---	10.16
E	.100	.140	.120	2.54	3.57	3.05
F	---	---	.100	---	---	2.54
G	---	---	.200	---	---	5.08
H	.023	.027	.025	.584	.686	.635