

Surface Mount Directional Coupler

JDC-20-5+ JDC-20-5

50Ω 50 to 1500 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
50 OHM TERM EXTERNAL	4

Outline Drawing

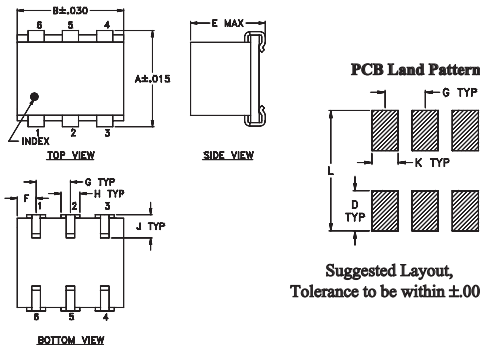


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-176 Suggested PCB Layout (PL-041)

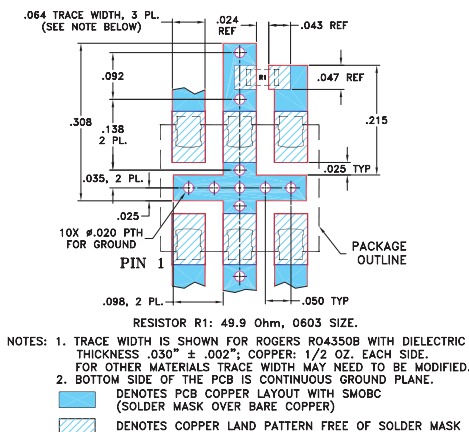

Features

- wideband, 50 to 1500 MHz
- low mainline loss, 0.5 dB typ.
- excellent solderability

Applications

- VHF/UHF
- satellite distribution
- cellular
- ISM/GSM




Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
	Nom.	Flatness	L		M		U		L		M		U			Typ.	Max.
f _L -f _U			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.
50-1500	20.5±0.5	±0.75	0.4	0.8	0.5	0.9	1.0	1.5	25	18	22	16	20	13	1.2	0.5	0.5


L = 50-500 MHz M = 500-750 MHz U = 750-1500 MHz
 1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)		Return Loss (dB)	
			In	Out	Out	Cpl
50.00	0.35	20.55	24.91	29.45	28.54	26.32
100.00	0.36	20.62	25.28	30.98	30.40	29.94
300.00	0.45	20.74	27.95	29.40	28.96	30.58
600.00	0.51	20.63	34.60	26.50	25.05	27.36
900.00	0.63	20.46	27.05	25.05	22.25	24.18
1000.00	0.68	20.37	25.02	24.77	21.36	22.99
1200.00	0.88	20.20	22.37	24.24	19.64	20.77
1320.00	0.91	20.12	21.35	24.06	18.68	19.46
1400.00	0.98	20.06	20.97	23.74	17.96	18.59
1500.00	1.08	20.07	20.69	23.62	17.22	17.51

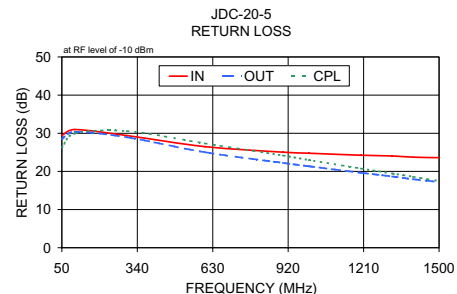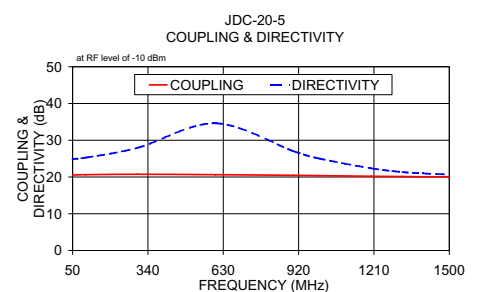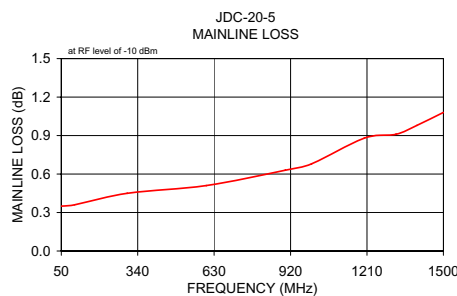

Electrical Schematic

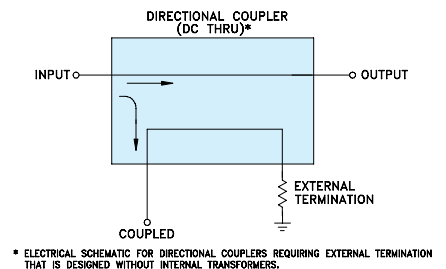

Mini-Circuits®
 ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. E
 M119986
 JDC-20-5
 WZ/TD/CP/AM
 081111