


## 13-Way Power Divider

P/N: JXWBGF-T-13-10.7-12.75

Frequency Range(GHz)	10.7-12.75
Insertion Loss(dB)	14 included coupling factor
Insertion Loss Ripple(dB)	±0.25 max
Isolation(dB)	17
Input Power(dBm)	+10 max
Amplitude Unbalance Included in Insertion Loss(dB)	±0.35
Input VSWR	1.5 max
Output VSWR	1.4 max
Attenuator way output(dB)	-9.5 ±0.5 on the 12 other output
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +80
Storage Temperature(°C)	-55 ~ +85

### Outline Drawing (Size: mm)

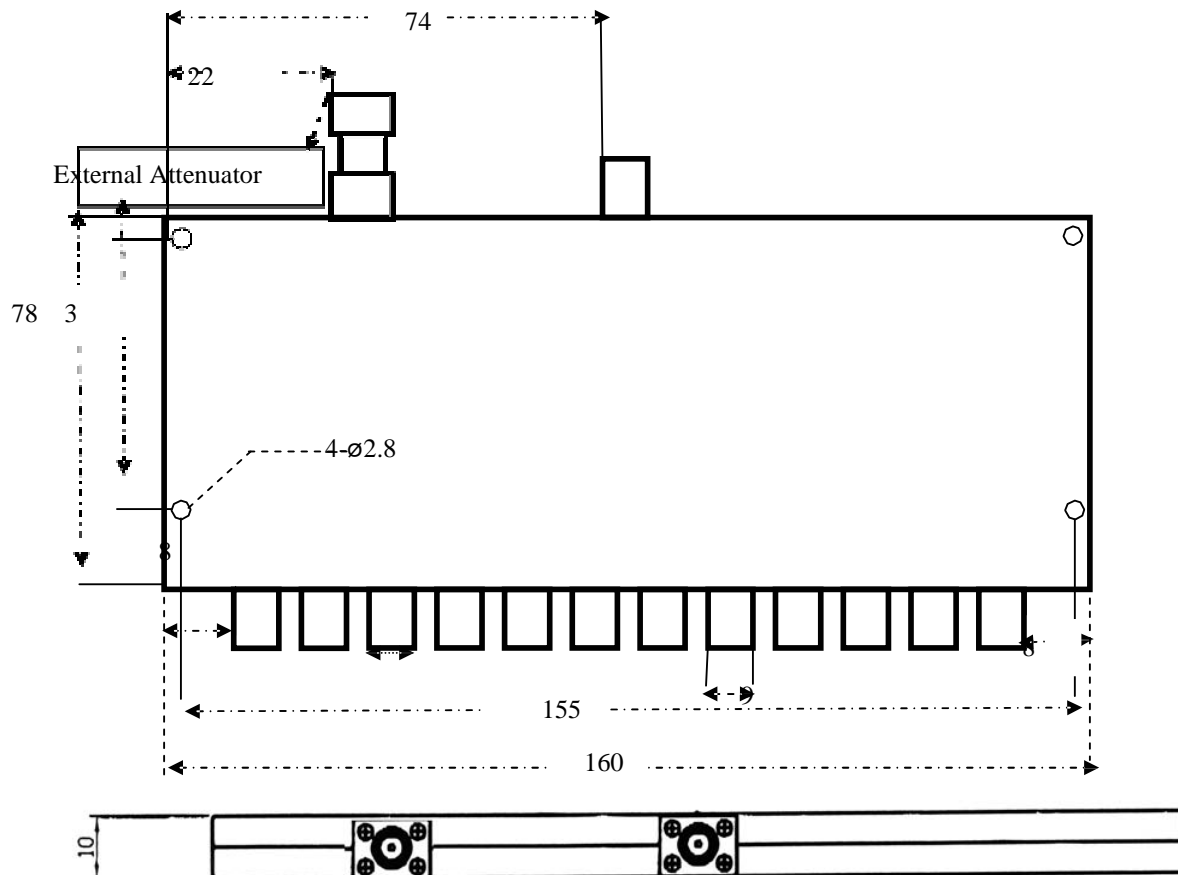

For current data sheets, please contact: [sales@aacix.com](mailto:sales@aacix.com)