


Mixer

P/N: JXWBHP-T-3000-4000-7

RF Frequency(GHz)	3-4
LO Frequency(GHz)	3-4
IF Frequency(GHz)	DC-0.5
Conversion Loss(dB)	7 Typ.
LO Power(dBm)	+7
LO to RF Isolation(dB)	> 28
LO to IF Isolation(dB)	> 20
Connector	SMA-Female
Operating Temperature(°C)	-40 ~+80
Storage Temperature(°C)	-55 ~+85

Outline Drawing (Size: mm)

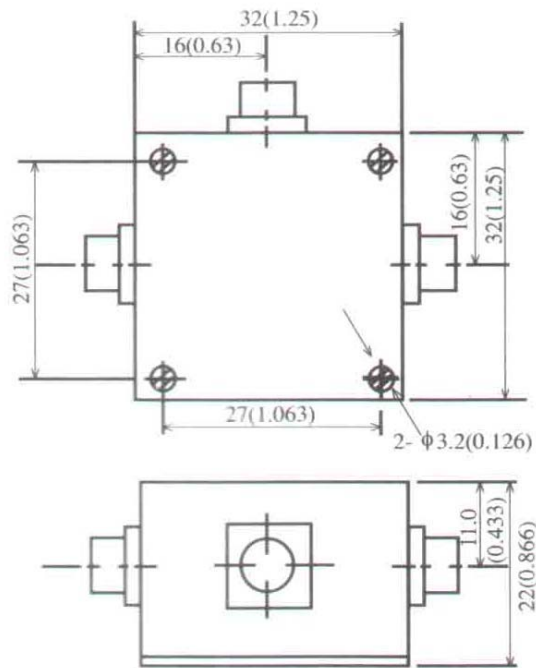

For current data sheets, please contact: sales@aacix.com