


Electrical Specifications at 25°C


Parameter			Units
Impedance	PRI.	600	Ω
R Load	SEC.	294	Ω
Turns Ratio		1:1	
Direct Current in Pri. (DCI)	maximum	0	mA
DC Resistance	PRI. $\pm 10\%$	180	Ω
	SEC. $\pm 10\%$	156	Ω
Insertion Loss	max., ref. 1 kHz	2.7	dB
Return Loss	min., 300 Hz to 3.5 kHz	30	dB
Longitudinal Balance	min., 300 Hz to 3.5 kHz	60	dB
Frequency Response	200 Hz to 5 kHz	± 0.2	dB
T.H.D.	typ. 600 Hz, -10 dBm	-83	dB
Isolation	minimum	1000	V_{RMS}

PCMCIA Modem Transformer

Schematic Diagram

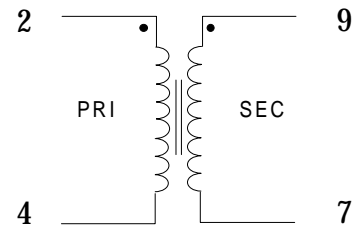

Physical Dimensions
inches (mm)

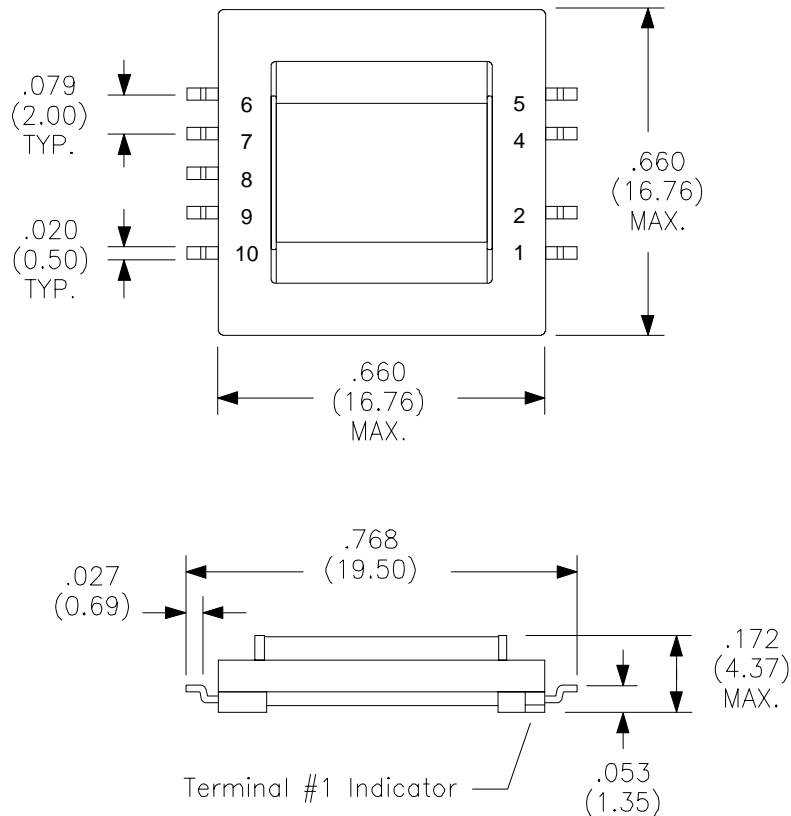

RHOMBUS P/N: T-787	
CUST P/N:	NAME:
DATE: 7/23/96	SHEET: 1 of 1