

# RF AMPLIFIER

## MODEL *TM5126*

Available as: TM5126, 4 Pin TO-8 (T4)  
 TN5126, 4 Pin Surface Mount (SM3)  
 FP5126, 4 Pin Flatpack (FP4)  
 BX5126, Connectorized Housing (H1)

### Features

- Gain: 15.0 dB Typical
- Output Power: +17 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

### Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5-500 MHz	5-500 MHz
Gain (dB)	15	14.0 Min.
Power @ 1 dB Comp. (dBm)	+17	+16.0 Min.
Reverse Isolation (dB)	-21	-20 Max.
VSWR In	<1.5:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise Figure (dB)	<3.0	3.5 Max.
Power Vdc	+15	+15
mA	50	55 Max.

Note: Care should always be taken to effectively ground the case of each unit.


### Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point.....+48 dBm (Typ.)  
 Second Order Two Tone Intercept Point..... +42 dBm (Typ.)  
 Third Order Two Tone Intercept Point..... +32 dBm (Typ.)

### Maximum Ratings

Ambient Operating Temperature ..... -55°C to + 100 °C  
 Storage Temperature ..... -62°C to + 125 °C  
 Case Temperature ..... + 125 °C  
 DC Voltage ..... + 18Volts  
 Continuous RF Input Power ..... + 13 dBm  
 Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)  
 Maximum Peak Power..... 0.5 Watt (3 µsec Max.)

### Typical Performance Data

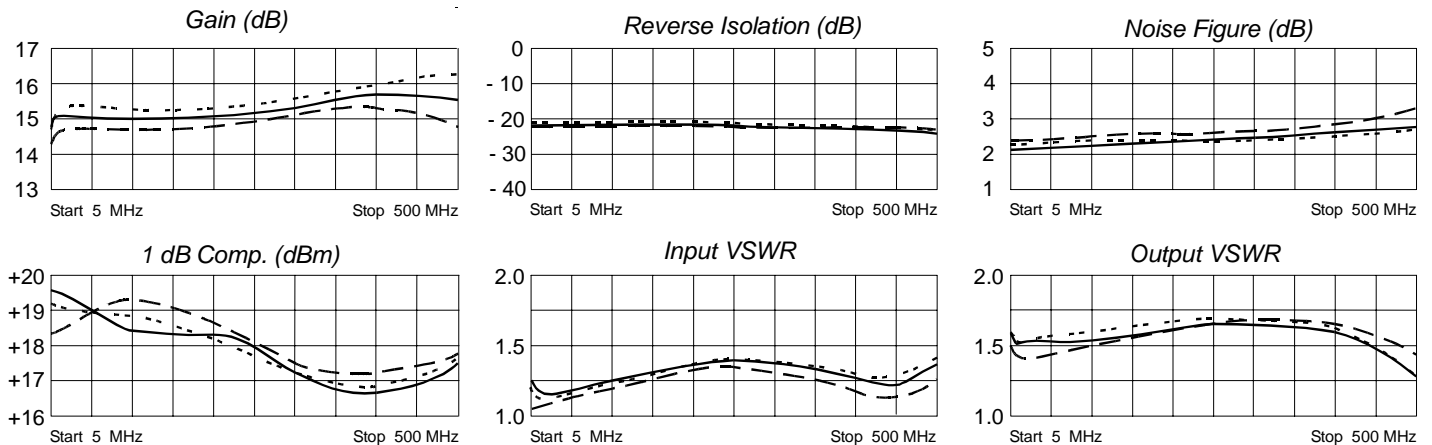

Legend ——— + 25 °C - - - - + 85 °C ······ -55 °C

### Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.11	- 46	5.48	-166	.09	-165	.22	- 9
10	.08	- 38	5.58	-175	.09	-175	.21	- 9
50	.08	- 60	5.57	164	.09	163	.21	- 25
100	.11	- 93	5.53	146	.08	144	.21	- 48
200	.14	-145	5.54	112	.08	109	.22	- 87
300	.15	169	5.78	76	.08	73	.23	-121
400	.12	111	6.08	35	.07	35	.21	-150
500	.15	45	6.08	- 16	.06	- 3	.13	-172
600	.31	- 7	4.83	- 75	.04	- 46	.15	- 98



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 6/16/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001