



1. Mechanical Dimensions:

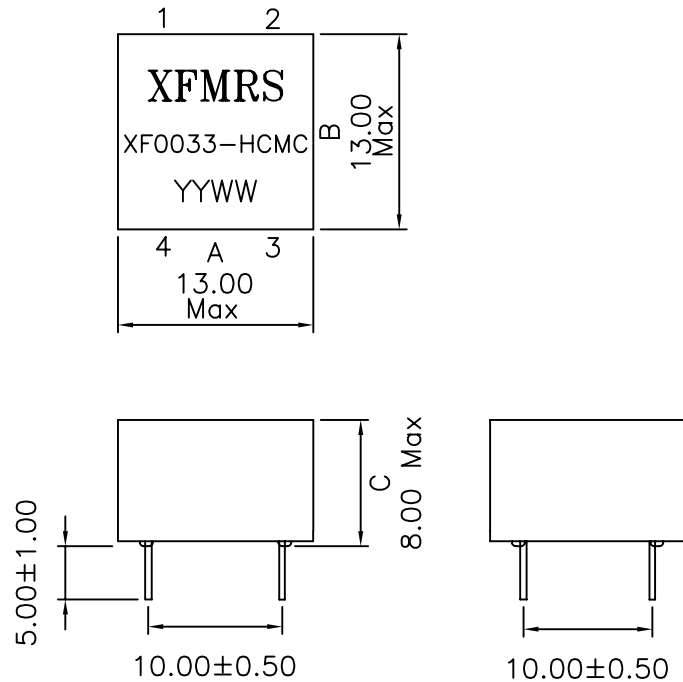

2. Schematic:

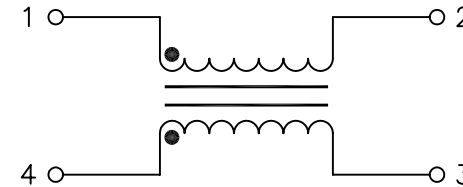

3. Electrical Specifications: @25°C

OCL: 3uH+50%–30% @10KHz 0.1V each winding
 DC Resistance: 0.235 ohm Max each winding
 Turns Ratio: 1:1±5%
 HIPOT: 1500Vrms
 Rated Current: 1A
 Rated Voltage: 250V
 Insulation Resistance: 10M ohm Min

Note:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0,
- ASTM oxygen index: > 28% ,
- Temperature rating: 155°C. UL file E151556,
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +125°C

DOC. REV A/1

XFMRS Inc	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0033-HCMC	REV A
TOLERANCES: .xx ±0.25	DWN.	廖玉坤	Feb-28-03
Dimensions in MM	CHK.	李清儿	Feb-28-03
SHEET 1 OF 1	APP.	BW	Feb-28-03