VG NO. CMT 908-H4

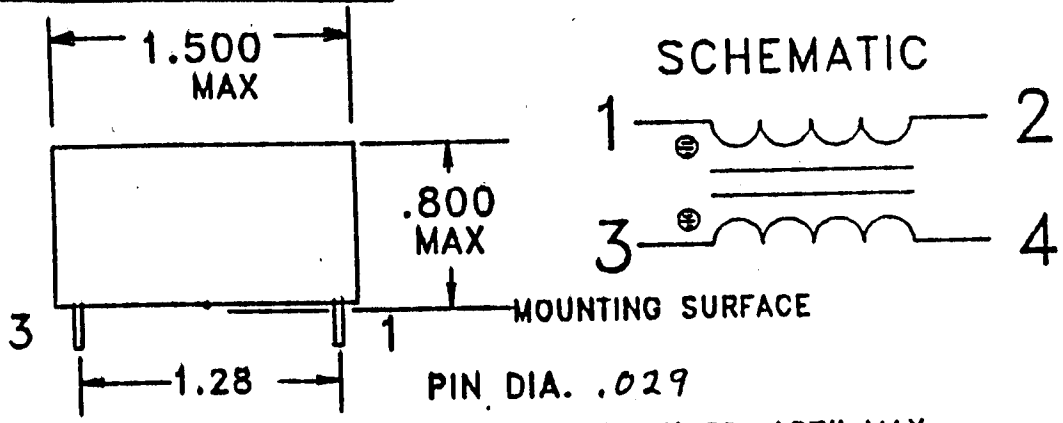

PIN DIA. .029

PIN LENGHT .092" MIN TO .187" MAX

.120 MIN SPACING BETWEEN WINDINGS

DC RESISTANCE IN OHMS	1 TO 2 .160 MAX
	3 TO 4 .160 MAX
POLARITY MUST BE CORRECT	
APPLY = .1V @ 10 KHz	
INDUCTANCE = 1 TO 2 16.0 mHYS MIN	
IND 1-2 ≅ 3-4 WITHIN .32 mHY.	
LEAKAGE INDUCTANCE = 180.0 uHYS	
900 uHY 1-3 WITH 2 & 4 SHORTED	
HIPOT = 2850 V FOR 1 SEC MIN	
WDG TO WDG	
CONTINUITY =	
IMPREGNATION NOTES =	
PINS TO BE FREE OF DEBRIS TO MTG SURFACE MIN	

STANDOFFS 4 PLCS .015 MIN.

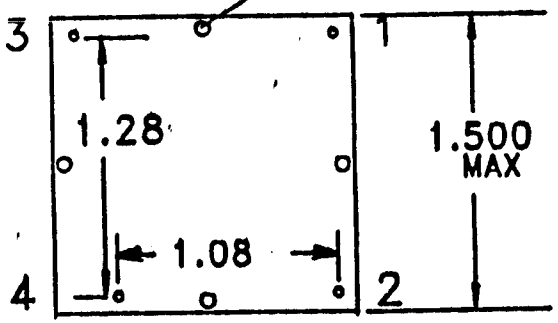

BOTTOM VIEW



TWO DIGIT VENDOR INDENTIFICATION CODE TO BE ASSIGNED AFTER VENDOR APPROVAL.

MARKING TOP VIEW OF COMPONENT

	CHANGE		DATE
	RELEASED	KDC	4-23-92
	ECN G7590	HH	5.17.97
	ECN G8248	HH	10.9.97

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES: TOLERANCES: X/x = ± 1/64 .xx = ± .01 .xxx = ± .005 ∠ = ± 0° 30'

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO MAGNETEK. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT AS MAGNETEK MAY OTHERWISE AGREE IN WRITING. DO NOT SCALE DRAWING.

MATERIAL

FINISH

MagneTek

DWN BY Y. Lalon	SCALE	TITLE	SIZE	DRAWING NO.
CHK BY		COMMON MODE FILTER INDUCTOR	A	CMT 908-H4
APVD BY K. Chase	DATE 4-22-92			