

# Monolithic crystal filter

## MQF10.7-1200/11



### Application

- 10 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

### Limiting values

		Unit	Value
Center frequency	$f_0$	MHz	10.7
Insertion loss		dB	$\leq 4.0$
Pass band at 3.0 dB		kHz	$\pm 6.0$
Ripple in pass band	$f_0 \pm 4.8$ kHz	dB	$\leq 2.0$
Stop band attenuation	$f_0 \pm 12$ kHz	dB	$\geq 70$
	$f_0 \pm 15$ kHz	dB	$> 90$
Alternate attenuation	$f_0 \pm 15 \dots 500$ kHz	dB	$> 90$


### Terminating impedance Z

R1    C1	Ohm/pF	910    25
R2    C2	Ohm/pF	910    25


Operating temp. range	$^{\circ}\text{C}$	-20... +70
-----------------------	--------------------	------------

### Characteristics MQF10.7-1200/11


#### Pass band

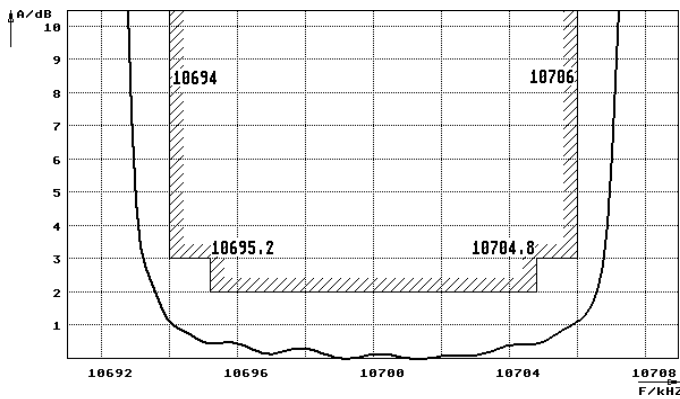

#### Stop band

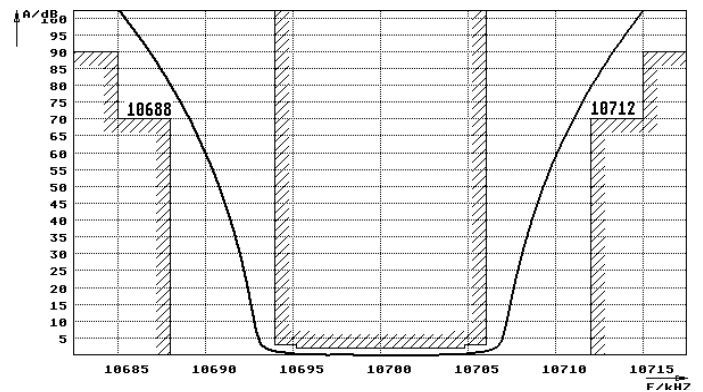

Pin connections: 1 Input  
2 Input-E  
3 Output  
4 Output-E

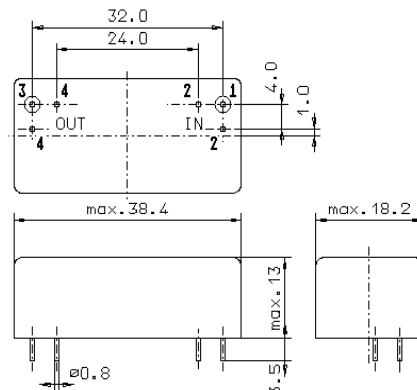

GM17