

## KVR100X64C3/128 100MHz SDRAM 168-Pin PC100 DIMM Memory Module

### DESCRIPTION:

This document describes ValueRAM's 16M x 64-bit (128MB), CAS Latency 3 (CL3) SDRAM (Synchronous DRAM) 100MHz memory module. The components on this module include sixteen 8M x 8-bit (2M x 8-bit x 4 Bank / PC100 components) SDRAM in TSOP packages. This 168-pin DIMM uses gold contact fingers and requires +3.3V. The electrical and mechanical specifications are as follows:

### FEATURES:

- |                          |   |
|--------------------------|---|
| ✓ CLK Cycle Time (tCC)   | min. = 10ns (CAS Latency = 3) / max. = 1000ns |
| ✓ Row Cycle Time (tRC)   | 70ns  |
| ✓ CLK to Output (tSAC)   | max. = 6ns (CAS Latency = 3)                  |
| ✓ Single Power Supply of | +3.3V (+/- .3V)                               |
| ✓ Power                  | 3.372 W (operating)                           |
| ✓ UL Rating              | 94 V - 0                                      |

**Note:** The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.375" (34.92mm).

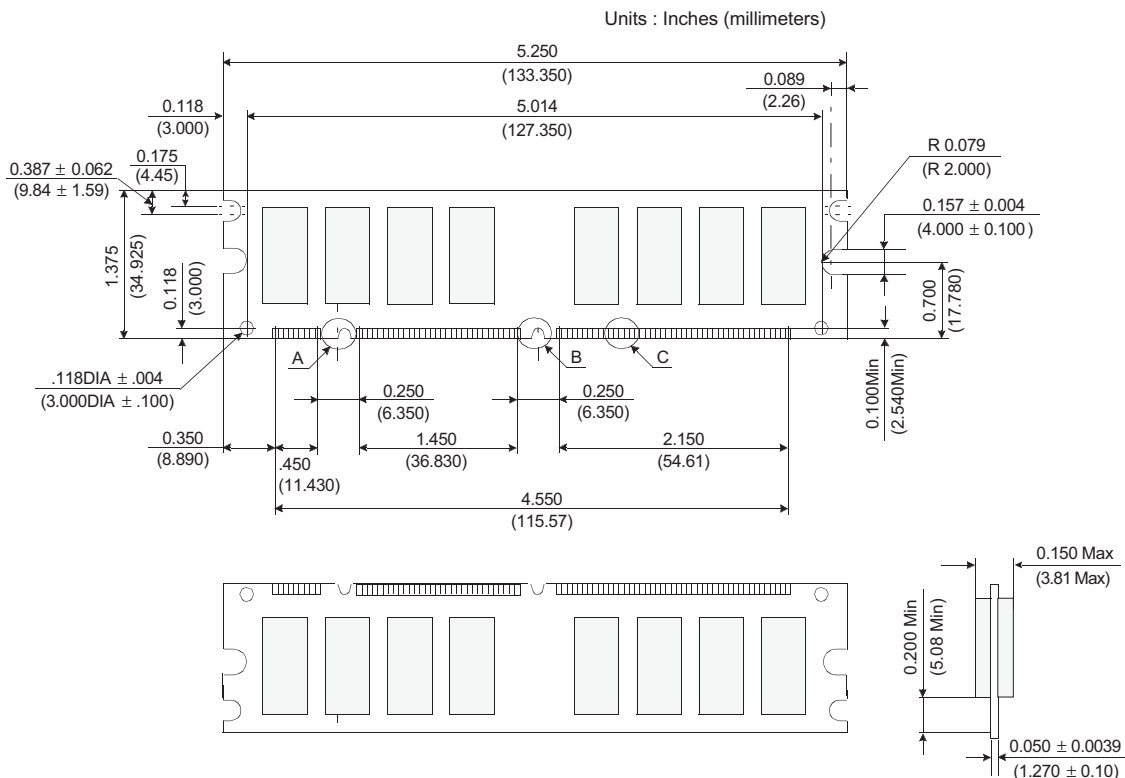


Figure 1: KVR100X64C3/128 168-Pin SDRAM Module