

High-Performance Double-Balanced Mixer

10 MHz-3 GHz

MD-/MDC-123

- Usable to 4 GHz
 - + 7 dBm Typical Compression Level
 - Excellent Intermodulation Rejection
- Guaranteed Specifications***

(From -55°C to +85°C)

Frequency Range	RF, LO Ports	0.01 - 3 GHz
	IF Port	0.01 - 3 GHz
Conversion Loss**		8 dB Max†
Isolation	LO to RF	(10-500 MHz) 25 dB Min (500-1000 MHz) 30 dB Min (1000-3000 MHz) 25 dB Min
	LO to IF	(10-500 MHz) 20 dB Min (500-1000 MHz) 25 dB Min (1000-3000 MHz) 25 dB Min
	RF to IF	(10-500 MHz) 20 dB Min (500-1000 MHz) 25 dB Min (1000-3000 MHz) 20 dB Min

Operating Characteristics

Impedance	50 Ohms Nominal
Maximum Input	
Total Power	600 mW Max @ 25°C Derated to 85°C @ 3.2 mW/°C
IF Port Current	50 mA Max
DC Polarity	Negative
DC Offset	< 7 mV Typical
RF Input	
1 dB Compression	+ 7 dBm Typical
1 dB Desensitization	+ 5 dBm Typical
SSB Noise Figure	Within 1 dB of Conversion Loss Max
Typical Two-Tone IM Ratio (with -10 dBm Input, each input, 25 MHz and 35 MHz IF)	100-2000 MHz ≥ 56 dB

Environmental

See Appendix for MIL-STD-883 screening option.

Pin Configuration RF; P8, LO; P5, IF; P4.
Case and all other pins are ground.

*All specifications apply when operated at +10 to +13 dBm available LO power with 50 ohm source and load impedance.

**Specified for IF frequency of 10 MHz to 2 GHz. See IF Port Bandwidth Graph.


†8.5 dB for MDC 123, 1500-3000 MHz.

Ordering Information


Model No.	Package
MD-123 PIN	Flatpack
MDC-123 SMA	Connectorized

Specifications Subject to Change Without Notice.

FP-2



C-7

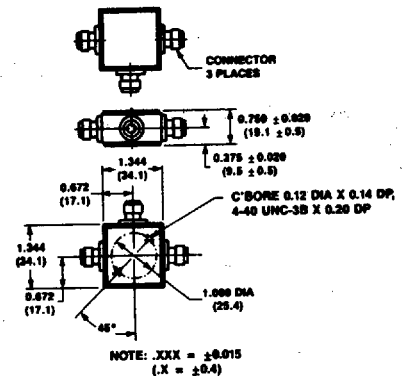


Dimensions in () are in mm.

See Appendix for complete physical dimensions.


Typical Performance

www.DataSheet4U.com


CONVERSION LOSS

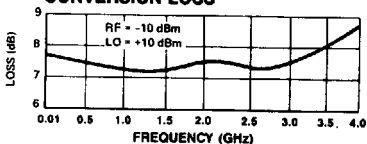


ISOLATION

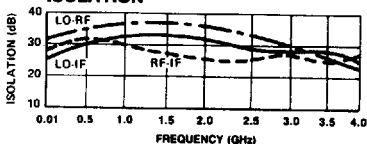

IF PORT RESPONSE

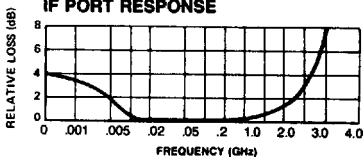

CONVERSION LOSS VS LO POWER

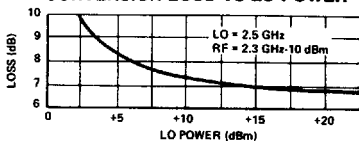

www.DataSheet4U.com