


Piezo Buzzer (DC)

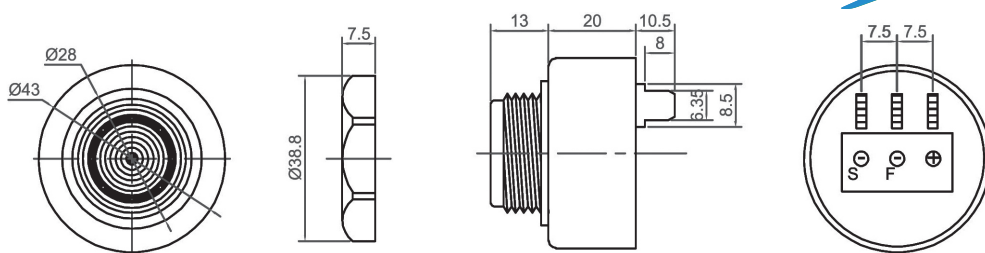


CPB4333-H

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB4333HC29BG	6 ~ 28	12	20	80 at 30cm	2900 ± 500	Continuous	-20 ~ +60	ABS	35
CPB4333HCF29BG	6 ~ 28	12	20	80 at 30cm	2900 ± 500	Continuous / Fast Pulse	-20 ~ +60	ABS	35
CPB4333HCS29BG	6 ~ 28	12	20	80 at 30cm	2900 ± 500	Continuous / Slow Pulse	-20 ~ +60	ABS	35
CPB4333HF29BG	6 ~ 28	12	20	80 at 30cm	2900 ± 500	Fast Pulse	-20 ~ +60	ABS	35
CPB4333HS29BG	6 ~ 28	12	20	80 at 30cm	2900 ± 500	Slow Pulse	-20 ~ +60	ABS	35

CANOPUS



CPB4333-R

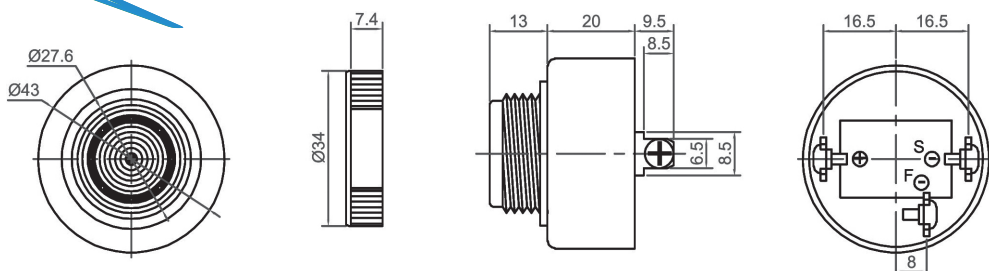

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB4333HC29BE	6 ~ 28	12	20	80 at 30cm	2900 ± 500	Continuous	-20 ~ +60	ABS	35
CPB4333HCF29BE	6 ~ 28	12	20	90 at 30cm	2900 ± 500	Continuous / Fast Pulse	-20 ~ +60	ABS	35
CPB4333HCS29BE	6 ~ 28	12	20	90 at 30cm	2900 ± 500	Continuous / Slow Pulse	-20 ~ +60	ABS	35
CPB4333HF29BE	6 ~ 28	12	20	80 at 30cm	2900 ± 500	Fast Pulse	-20 ~ +60	ABS	35
CPB4333HS29BE	6 ~ 28	12	20	80 at 30cm	2900 ± 500	Slow Pulse	-20 ~ +60	ABS	35

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216