


Thin Film Microwave Resistor



Product may not be to scale

The MIF resistor chips on alumina are designed with low shunt capacitance. Resistor geometrics are compatible with strip lines, making them ideally suited for microwave circuits.

These chips are manufactured using Vishay Electro-Films (EFI) sophisticated thin film equipment and manufacturing technology. The MIFs are 100% electrically tested and visually inspected to MIL-STD-883.

APPLICATIONS

Vishay EFI MIF chip resistors provide excellent high frequency response and are ideally suited for prototyping.

Typical application areas are:

- Amplifiers
- Oscillators
- Attenuators
- Couplers
- Filters

FEATURES

- Small single chip size: 0.016 x 0.020 inches
- Microwave resistance range: 20Ω to 100Ω
- Overall resistance range: 20Ω to 2kΩ
- Alumina substrate
- Low stray capacitance: < 0.2pF
- Resistor material: tantalum nitride self passivating
- Moisture resistant
- Power: 50mW

TEMPERATURE COEFFICIENT OF RESISTANCE, VALUES AND TOLERANCES

Resistance Range	20Ω to 100Ω
Tolerance	± 1%, ± 5%, ± 10%, ± 20% standard
TCR	± 100ppm/°C

OPTIONS: TCR's: ± 50, ± 25, ± 10ppm/°C
 Tolerances: 1.0%
 Values to 2kΩ (serpentine trim)
 Consult Applications Engineer


STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	
Noise, MIL-STD-202, Method 308	- 20dB typical
Moisture resistance, MIL-STD-202, Method 106	± 0.5% maximum ΔR/R
Stability, 1000 hours, + 125°C, 25mW	± 0.5% maximum ΔR/R
Operating temperature range	- 55°C to + 125°C
Thermal shock, MIL-STD-202, Method 107, Test condition F	± 0.25% maximum ΔR/R
High temperature exposure, + 150°C, 1000 hours	± 0.5% maximum ΔR/R
Dielectric voltage breakdown	400V
Insulation resistance	10 ¹² minimum
Operating voltage	100V maximum
DC power rating at + 70°C (derated to zero at 150°C)	50mW maximum
5 x rated power short-time overload, + 25°C, 5 seconds	± 0.25% maximum ΔR/R


VISHAY ELECTRO-FILMS • FRANCE +33.4.93.37.28.24 FAX: +33.4.93.37.27.31 • GERMANY +49.9287.710 FAX: +49.9287.70435 • ISRAEL +972.3.557.0945 FAX: +972.3.558.9121
 • ITALY + 39.2.300.11911 FAX: +39.2.300.11999 • JAPAN +81.3.5464.6411 FAX: +81.3.5464.6433 • SINGAPORE +65.788.6668 FAX: +65.788.0988
 • SWEDEN +46.8.594.70590 FAX: +46.8.594.70581 • UK +44 191 514 8237 FAX: +44 1953 457 722 • USA: (401) 738-9150 FAX: (401) 738-4389



DIMENSIONS in inches

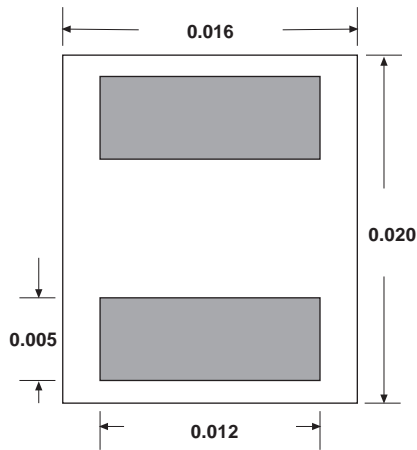

SCHEMATIC



MICROWAVE RESISTORS

MECHANICAL SPECIFICATIONS in inches	
PARAMETER	
Chip size	0.016 x 0.020 ± 0.003 (0.40 x 0.5 ± 0.076mm)
Chip thickness	0.010 ± 0.001 (0.25 ± 0.025mm)
Chip substrate material	99.6% alumina, 2 - 4µ inch finish
Resistor material	Tantalum nitride, self passivating
Bonding pad size	0.005 x 0.012 (0.125 x 0.30mm)
Number of pads	2
Pad material	25kÅ minimum gold standard
Backing	None

OPTIONS: Terminations: Aluminum/Solder
 Gold back for solder die attach
 5 mil chip thickness
 Contact Applications Engineer

ORDERING INFORMATION						
Example: 100% visualled, 50Ω, ± 10%, ± 100ppm/°C TCR, Gold Pads, Class H						
P/N:	W	MIF	002	5000	B	K
	INSPECTION /PACKAGING	PRODUCT FAMILY	PROCESS CODE	RESISTANCE VALUE	MULTIPLIER CODE	TOLERANCE CODE
	W = 100% visually inspected parts in matrix trays per MIL-STD-883			Use first 4 significant digits of resistance	B = 0.01 A = 0.1 0 = 1	F = 1.0% G = 2.0% H = 2.5% J = 5.0% K = 10% M = 20% L = 25% N = 50%
	X = Sample, visually inspected loaded in matrix trays (4% AQL)					

VISHAY ELECTRO-FILMS • FRANCE +33.4.93.37.28.24 FAX: +33.4.93.37.27.31 • GERMANY +49.9287.710 FAX: +49 9287.70435 • ISRAEL +972.3.557.0945 FAX: +972.3.558.9121
 • ITALY + 39.2.300.11911 FAX: +39.2.300.11999 • JAPAN +81.3.5464.6411 FAX: +81.3.5464.6433 • SINGAPORE +65.788.6668 FAX: +65.788.0988
 • SWEDEN +46.8.594.70590 FAX: +46.8.594.70581 • UK +44 191 514 8237 FAX: +44 1953 457 722 • USA: (401) 738-9150 FAX: (401) 738-4389