



1. CONFIGURATION & DIMENSIONS :

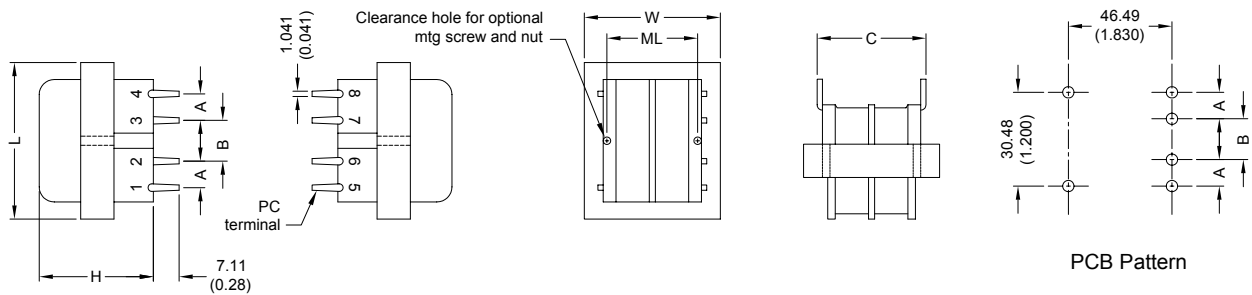

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
7	36	66.68 (2.625)	55.58 (2.188)	40.50 (1.600)	----	10.16 (.400)	10.16 (.400)	46.99 (1.850)	None	510

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|--|
| a. Primary Voltage | AC 115 V 60 Hz . |
| b. No Load Primary Current | Less Than 35mA . |
| c. Secondary Voltage (±5%) | Series AC 58.20V .
Parallel AC 29.10V . |
| d. Secondary Load Current | Series 0.75A .
Parallel 1.50A . |
| e. Full Load Primary Current | Less Than 390mA . |
| f. Full Load Secondary Voltage (±5%) | Series 48.00V .
Parallel 24.00V . |
| g. DC Resistance | |
| Pin 1-4 | Primary = 22.50 Ohm . |
| Pin 5-6 | Secondary = 3.15 Ohm . |
| Pin 7-8 | = 3.79 Ohm . |
| h. Insulation Resistance | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (Hi-Pot) | AC 2500V 60Hz 1 Minutes . |
| j. Temperature Rise | Less Than 60 Deg C . |
| k. Core Size | EI-66 x 16.00 m/m . |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD