
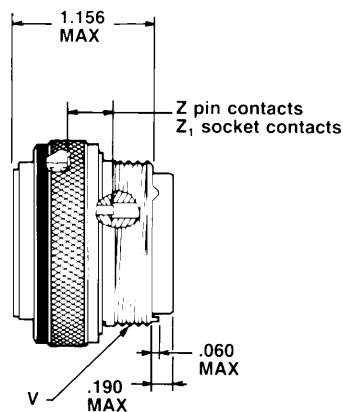


PTS06 DR (MS3475)*, (MS3476)

straight plug



PTS06DRL-XX-XXX
 *PTGS06DRL-XX-XXX
 MS3476XX-XXX
 *MS3475XX-XXX

*With grounding fingers

Shell Size	Plug Front View		Plug Side View				
	Q Dia. Max.	Modified Major Dia.	V Thread Class 2A UNEF (Plated)	Z ±.031 Contact Size		Z ₁ ±.031 Contact Size	
				20	16	20	16
8	.782	.476 - .470	.5000-20	.430	.511	.384	.475
10	.926	.604 - .600	.6250-24	.430	.511	.384	.475
12	1.043	.728 - .724	.7500-20	.430	.511	.384	.475
14	1.183	.853 - .849	.8750-20	.430	.511	.384	.475
16	1.305	.978 - .974	1.0000-20	.430	.511	.384	.475
18	1.391	1.034 - 1.030	1.0625-18	.430	.511	.384	.475
20	1.531	1.158 - 1.154	1.1875-18	.369	.460	.323	.414
22	1.656	1.283 - 1.279	1.3125-18	.369	.460	.323	.414
24	1.777	1.408 - 1.404	1.4375-18	.369	.460	.323	.414

All dimensions for reference only.