


Overmold Kits

* Overmold Kits include connector and 2 clam shells

Insulator: 2-piece Polyester 94V0 (black)
Shell: Steel, zinc plated yellow chromate coat (optional bright tin with indents)

Pin: Brass, gold plated
Socket: Phosphor bronze
Contact Retention: Snap-in insulation grip

Termination	Crimp & Poke less contacts	Crimp & Poke (Overmold Kits) less contacts
Mounting	.120" hole	.120" hole
9	Plug	DEA-9PFO
	Socket	DEA-9SFO
15	Plug	DAA-15PFO
	Socket	DAA-15SFO
25	Plug	DBA-25PFO
	Socket	DBA-25SFO
37	Plug	DCA-37PFO
	Socket	DCA-37SFO
50	Plug	DDA-50PFO
	Socket	DDA-50SFO




Crimp Ferrules	A	B
462-44-22-451	.437	.200
462-44-22-442	.437	.235
462-44-22-443	.437	.250
462-44-22-444	.437	.325
462-44-22-445	.437	.350
462-44-22-446	.437	.375
462-44-22-447	.437	.437
462-44-22-450	.460	.460

D*A Series: Insulation Grip/Crimp & Poke Contacts

Type	Part No.	Type	Part No.
Gold Flash AWG 20-24 15000 per reel	Pin	DGP-15-1	Gold Flash AWG 20-24 300 per reel
	Socket	DGS-15-1	
Gold Flash AWG 26-30 15000 per reel	Pin	DGP-15-3	Gold Flash AWG 26-30 300 per reel
	Socket	DGS-15-3	
30 pinches Gold AWG 20-24 15000 per reel	Pin	DGP-15-2	30 pinches Gold AWG 20-24 300 per reel
	Socket	DGS-15-2	
30 pinches Gold AWG 26-30 15000 per reel	Pin	DGP-15-4	30 pinches Gold AWG 26-30 300 per reel
	Socket	DGS-15-4	


Insulation Grip and Crimp & Poke Contacts

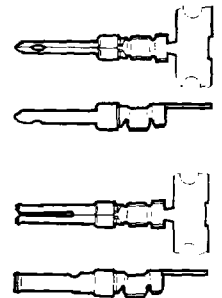

Series-3

Insulator: Mono block diallyl phthalate
Shell: Steel, zinc plated, yellow chromate coat (optional bright tin with indents)
Pin: Brass, gold plated

Socket: Phosphor bronze, gold plated
Contact Retention: Snap-in, rear release

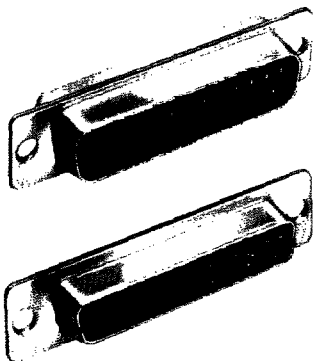

Termination	Crimp & Poke (with loose machined contacts)	Crimp & Poke (less contacts)
Mounting	.120" Hole	.120" Hole
9	Plug	DEMA-9P
	Socket	DEMA-9S
15	Plug	DAMA-15P
	Socket	DAMA-15S
25	Plug	DBMA-25P
	Socket	DBMA-25S
37	Plug	DCMA-37P
	Socket	DCMA-37S
50	Plug	DDMA-50P
	Socket	DDMA-50S

Loose Machined Contacts

Series 3	Type	Parts
Standard	Pin	330-5291-000
	Socket	031-1007-000
50 mil Gold	Pin	330-5291-037
	Socket	031-1007-042

Commercial equivalent to MIL-C-24308 spec with cadmium plated shells and heavier gold plated contacts are available. Add suffix "M," i.e. DEMAM.

* Add "TI" after P for plug with indents and bright tin, and "T" after S for bright tin