

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

TABLE 2 CONTACTS

[XXX]B	CLIP PLATING	SHELL PLATING	PCB HOLE
001B	30u" GOLD OVER 50u" NICKEL	200u" TIN/LEAD OVER 100u" NICKEL	ø.026±.003
002B	30u" GOLD OVER 50u" NICKEL	10u" GOLD OVER 100u" NICKEL	ø.026±.003
011B	10u" GOLD OVER 50u" NICKEL	200u" TIN/LEAD OVER 100u" NICKEL	ø.026±.003
014B	100u" TIN/LEAD OVER 50u" NICKEL	200u" TIN/LEAD OVER 100u" NICKEL	ø.026±.003

TABLE 1

PART NUMBER DIP-[]-[XXX]B	DIMENSION				
	"A"	"B"	"C"	"D"	"E"
306	.200	2	.300	.195	.100
308	.300	3			
314	.600	6			
316	.700	7			
318	.800	8			
320	.900	9			
322	1.000	10			
324	1.100	11			
328	1.300	13			
624	1.100	11	.600	.420	.140
628	1.300	13			
632	1.500	15			
640	1.900	19			
648	2.300	23			

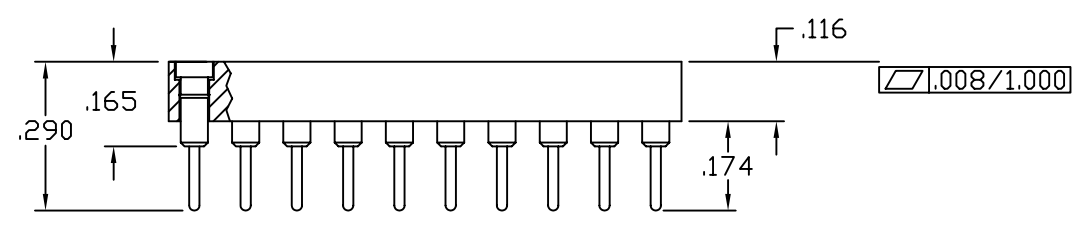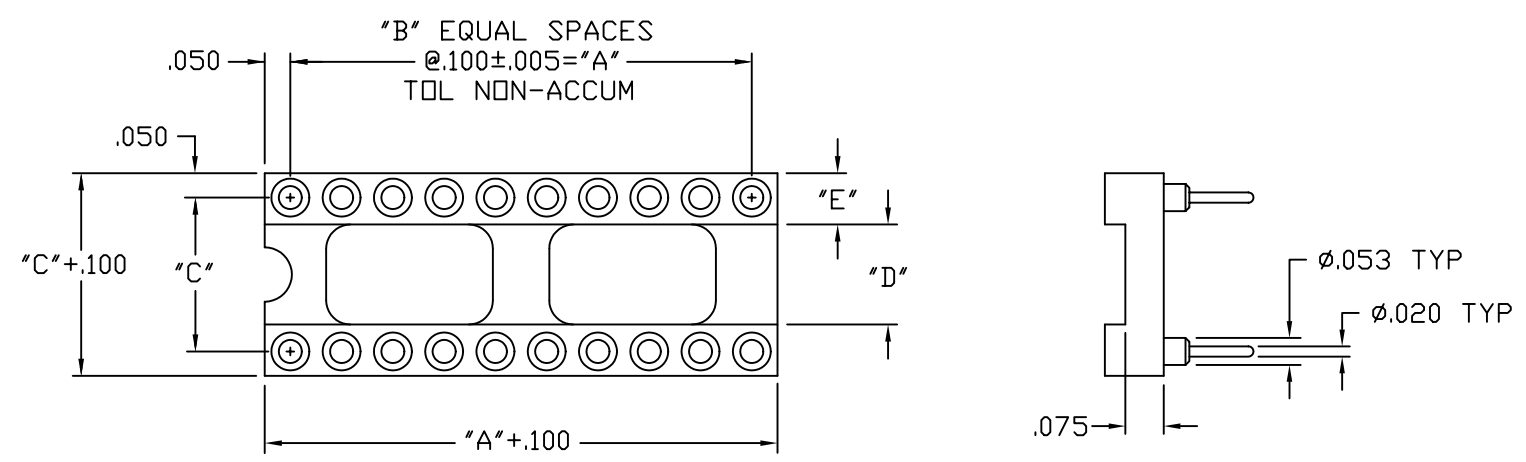

(DIP-320-[XXX]B SHOWN)

NOTES:

- PRODUCT NUMBERING CODE:
DIP-NNN-[XXX]B
 - TOTAL NO. OF POSITIONS.
 - ROW TO ROW SPACING.
- INSULATOR MATERIAL:
POLYESTER MATERIAL (PBT) 30% GLASS REINFORCED,
RATED UL 94V-0, COLOR BLACK.
- CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD PER QQ-B-626.
INNER CONTACT: BERYLLIUM COPPER, ALLOY 172 PER QQ-C-533.
- CONTACT PLATING:
GOLD PER MIL-G-45204, TYPE 1
GRADE C, NICKEL PER QQ-N-290.
TIN/LEAD PER MIL-P-81728, TYPE 1

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY
ltr	ecn no	dr	date	linear	.XX ±.01	
A	V00857	DLW	4/5/00		.XXX ±.005	
B	D10009	TB	7/5/01	angles	.XXXX ±.0020	INCH
				dr	0° ±2°	
				enr	D. WOLFORD 4/5/00	scale 2:1
				chr	A. VASBINDER 4/5/00	
				appd	A. VASBINDER 4/5/00	
sheet index	revision sheet	B	1			

PART NUMBER (SEE TABLES)
DIP-[]-[XXX]B

FCI Electronics
www.fciconnect.com

title
DIP SOCKETS
.100 C/L

product family DIP
size dwg no
58708

code -
sheet 1 of 1

cage code
22526