

Optical Components OL495N-80-P20-W90

Rev.2 [Mar. 2009]

1490n m Pulsed MQW Laser Diode Coaxial Module with SMF.

1.DESCRIPTION

OL495N-80-P20-W90 is a 1490nm Laser Diode in coaxial package with SMF.

2. FEATURES

· Fiber output: Pf=80mW

· Pulsed MQW FP Laser

- · Coaxial package module
- \cdot Single mode fiber (SMF)

3. APPLICATION

•OTDRs •Optical measuring instruments

4.0PTICAL AND ELECTRICAL CHARACTERISTICS

		$(T_c=25^{\circ}C, 10\mu s \text{ pulse width and } 1\% \text{ duty})$				
Parameter	Symbol	Symbol Test Conditions		Тур.	Max.	Unit
Threshold Current	Ith			25	60	mA
Operation Current	Iop			500	640	mA
LD Forward Voltage	Vf	Pf=80mW		2.0	3.0	V
Center Wavelength	λc		1470	1490	1510	nm
Spectral Width	σ	Pf=80mW, RMS×1		5	10	nm

5.ABSOLUTE MAXIMUM RATING

($T_c=25^{\circ}C$, unless otherwise specified)

		(ie 20 c, unless other wise spe	
Parameter	Symbol	Rating	Unit
Fiber Output Power	Pf	96*	mW
LD Reverse Voltage	Vrl	2.0	V
LD Forward Current	Ifl	840*	mA
Operating Temperature	Тор	-20 to +60	°C
Storage Temperature	Tstg	-40 to +85	°C


*Pulse width $\leq 10 \mu s$, duty $\leq 1\%$.

Exceeding these ratings may lead to immediate destruction or permanent deterioration of the device.

OL495N-80-P20-W90


6. CONNECTOR AND FIBER SPECIFICATIONS

Parameter	Specifications	Unit
Туре	SMF	
Mode Field Diameter	10±1	μm
Cladding Diameter	125±2	μm
Jacket Diameter	900	μm
Fiber Length	1000 (Min.) See Fig.1	mm

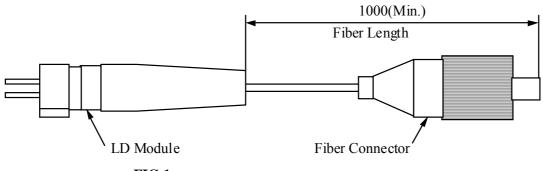





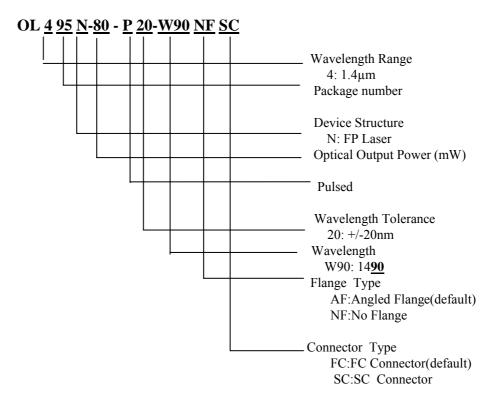


8.ATTACHED DATA (at 25°C)

(1) If-Pf graph (2) spectrum graph at Pf=80mW (3) Threshold current (Ith)


- (4) operating current (Iop) at Pf=80mW (5) Center wavelength (λc) at Pf=80mW
- (6) Spectral Width (σ) at Pf=80mW


9.OUTLINE DRAWING

All dimensions in millimeters Tolerances unless noted +/-0.5 Package No. 95(Unit: mm)

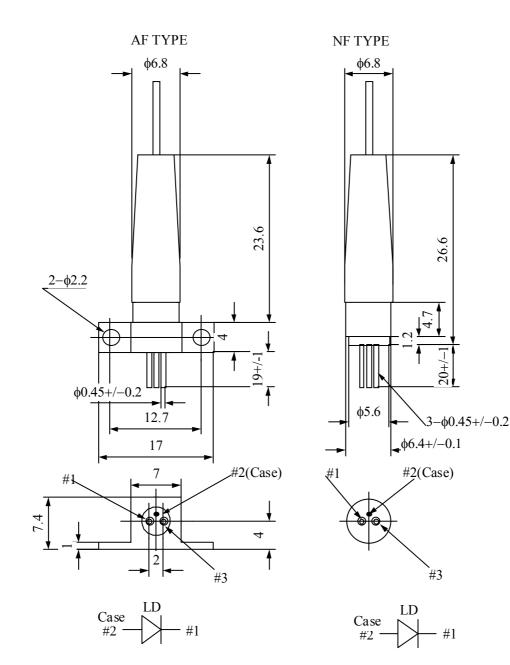


10.Typical Characteristics



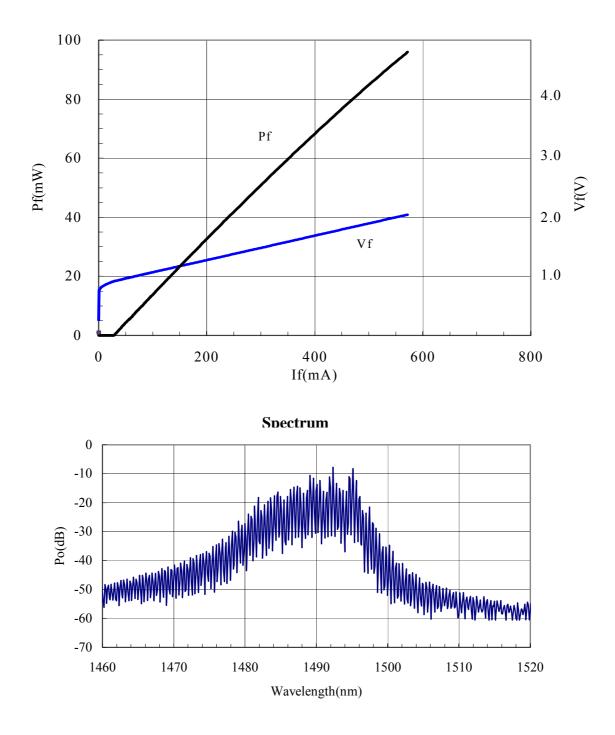

11. SAFETY INFORMATION ON THIS PRODUCT

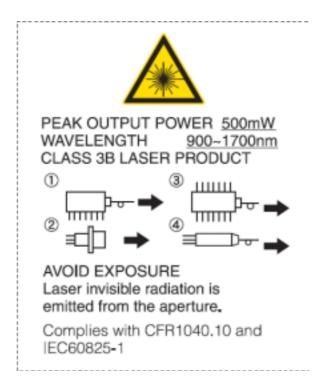

Warning	A laser beam is emitted from this laser diode during operation.
_	The invisible or visible laser beam, directly or indirectly, may cause injury to
Laser Beam	the eye
	or loss of eyesight.
	Do not look directly into the laser beam.
	Avoid exposure to the laser beam, any reflected or collimated beam.
Caution	The product contains gallium arsenide, GaAs.
	GaAs vapor and powder are hazardous to human health if inhaled, ingested or
GaAs	swallowed.
Product	Do not destory or burn the product.
	Do not crush or chemically dissolve the product.
	Do not put the product in the mouth.
	Observe related laws and company regulations when discarding this product.
	The product should be excluded from general industrial waste or household
	garbage.
Caution	A glass-fiber is attached on the product. Handle with care.
Optical Fiber	When the fiber is broken or damaged, handle carefully to avoid injury from
	the damaged part or fragments.

All specifications described herein are subject to change without notice.

Notice

- 1. The information contained herein can change without notice owing to product and/or technical improvements. Before using the product, please make sure that the information being referred to is up-to-date.
- 2. The outline of action and examples for application circuits described herein have been chosen as an explanation for the standard action and performance of the product. When planning to use the product, please ensure that the external conditions are reflected in the actual circuit, assembly, and program designs.
- 3. When designing your product, please use our product below the specified maximum ratings and within the specified operating ranges including, but not limited to, operating voltage, power dissipation, and operating temperature.
- 4. OKI SEMICONDUCTOR assumes no responsibility or liability whatsoever for any failure or unusual or unexpected operation resulting from misuse, neglect, improper installation, repair, alteration or accident, improper handling, or unusual physical or electrical stress including, but not limited to, exposure to parameters beyond the specified maximum ratings or operation outside the specified operating range.
- 5. Neither indemnity against nor license of a third party's industrial and intellectual property right, etc. is granted by us in connection with the use of the product and/or the information and drawings contained herein. No responsibility is assumed by us for any infringement of a third party's right which may result from the use thereof.
- 6. The products listed in this document are intended for use in general electronics equipment for commercial applications (e.g., office automation, communication equipment, measurement equipment, consumer electronics, etc.). These products are not authorized for use in any system or application that requires special or enhanced quality and reliability characteristics nor in any system or application where the failure of such system or application may result in the loss or damage of property, or death or injury to humans. Such applications include, but are not limited to, traffic and automotive equipment, safety devices, aerospace equipment, nuclear power control, medical equipment, and life-support systems.
- 7. Certain products in this document may need government approval before they can be exported to particular countries. The purchaser assumes the responsibility of determining the legality of export of these products and will take appropriate and necessary steps at their own expense for these.
- 8. No part of the contents contained herein may be reprinted or reproduced without our prior permission.

Copyright 2009 OKI SEMICONDUCTOR CO., LTD.