

**Micro Commercial Components** 

Micro Commercial Components 20736 Marilla Street Chatsworth

CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939 2SC4115S-Q 2SC4115S-R 2SC4115S-S

# **Features**

- Case Material: Molded Plastic. UL Flammability Classificatio Rating 94-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Power dissipation: P<sub>CM</sub> = 0.3W(T<sub>amb</sub>=25<sup>°</sup>C)
- Collector current: I<sub>CM</sub> = 3A
- Collector-base voltage: V<sub>(BR)CBO</sub> = 40V
- Operating and storage junction temperature range

 $T_J$ ,  $T_{stg}$ : -55  $^{\circ}$ C to + 150  $^{\circ}$ C

# Electrical Characteristics @ 25% Unless Otherwise Specified


Symbol	Parameter	Min	Тур	Max	Unit
V <sub>CEO</sub>	Collector-Emitter Voltage (I <sub>C</sub> =-50 $\mu$ A, I <sub>E</sub> =0)	20	1	-	V
$V_{CBO}$	Collector-Base Voltage (I <sub>C</sub> =-1 μ A, I <sub>B</sub> =0)				V
V <sub>EBO</sub>	Emitter-Base Voltage (I <sub>E</sub> =-50 μ A, I <sub>C</sub> =0)	6.0		-	V
I <sub>CBO</sub>	Collector cut-off Current (V <sub>CB</sub> =-20V, I <sub>E</sub> =0)			0.1	μА
I <sub>EBO</sub>	Emitter cut-off Current (V <sub>EB</sub> =-5V, I <sub>C</sub> =0)			0.1	μА
h <sub>FE</sub>	DC current gain (V <sub>CE</sub> =-2V, I <sub>C</sub> =-0.1A)	120		560	
$V_{\text{CE(sat)}}$	Collector-Emitter Saturation Voltage (I <sub>C</sub> =-2A, I <sub>B</sub> =-0.1A)			0.5	V
f⊤	Transition Frequency (V <sub>CE</sub> =2.0Vdc, I <sub>C</sub> =0.5Adc)	200			MHz

Measured Using Pulse Current

## **CLASSIFICATION OF h**<sub>FE</sub>

Rank	Q	R	S
Range	120-270	180-390	270-560
Marking	4115Q	4115R	4115S

# NPN Plastic-Encapsulate Transistors

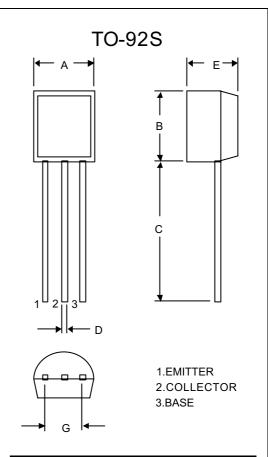

DIMENSIONS					
	INCH	HES	MM		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.16		4.	00	
В	.12		3.00		
С	.59		15.00		
D	).	)2	0.	45	
Е	).	08	2.	00	
G	.20		5.	00	
		•			



# **Ordering Information**

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Bag

## \*\*\*IMPORTANT NOTICE\*\*\*

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical,

Aerospace or Military Applications.