


Series 1025 & 1026

Molded Unshielded RF Coils

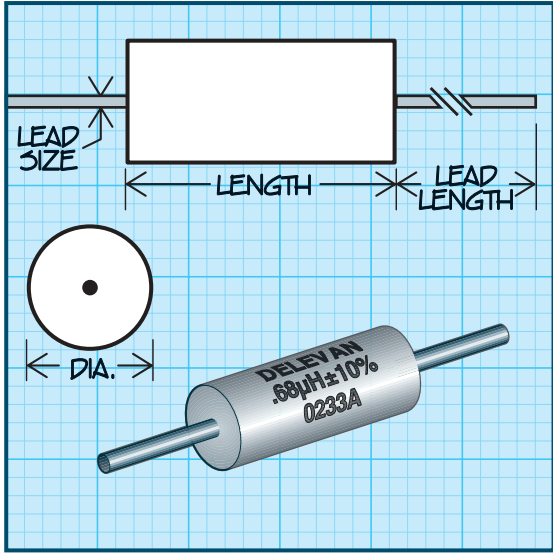

Military Specifications (1025 Series Only)

MS75083 (LT4K); MS75084 (LT10K); MS75085 (LT10K)

Physical Parameters

	Inches	Millimeters
Length	0.250 ± 0.010	6.35 ± 0.25
Diameter	0.095 ± 0.010	2.41 ± 0.25
Lead Size		
AWG #24 TCW	0.020 ± 0.0015	0.508 ± 0.038
Lead Length	1.5 ± 0.12	38.1 ± 3.05

Current Rating at 90°C Ambient

LT4K 35°C Rise
LT10K 15°C Rise

Operating Temperature Range

LT4K -55°C to +125°C
LT10K -55°C to +105°C

Maximum Power Dissipation at 90°C

Phenolic: LT4K 0.21 W
Iron: LT10K 0.09 W
Ferrite: LT10K 0.073 W

Weight Max. (Grams) 0.3

• For in-between values see Series 1782 (page 40)

Note (1026 Series only) Self Resonant Frequency (SRF) values are calculated and for reference only.

Packaging Tape & reel: 12" reel, 3500 pieces max.; 14" reel, 6000 pieces max. For additional packaging options, see page 146.

Made in the U.S.A.

	PART NUMBER	MIL DASH #	INDUCTANCE (µH)	TOLERANCE	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)
MS75083- SERIES 1025 PHENOLIC CORE (LT4K)									
1025-94K	1		0.10	±10%	40	25.0	680.0	0.08	1380
1025-96K	2		0.12	±10%	40	25.0	640.0	0.09	1300
1025-00K	3		0.15	±10%	38	25.0	600.0	0.10	1230
1025-02K	4		0.18	±10%	35	25.0	550.0	0.12	1120
1025-04K	5		0.22	±10%	33	25.0	510.0	0.14	1040
1025-06K	6		0.27	±10%	33	25.0	430.0	0.16	975
1025-08K	7		0.33	±10%	30	25.0	410.0	0.22	830
1025-10K	8		0.39	±10%	30	25.0	365.0	0.30	710
1025-12K	9		0.47	±10%	30	25.0	330.0	0.35	660
1025-14K	10		0.56	±10%	30	25.0	300.0	0.50	550
1025-16K	11		0.68	±10%	28	25.0	275.0	0.60	500
1025-18K	12		0.82	±10%	28	25.0	250.0	0.85	420
1025-20K	13		1.0	±10%	25	25.0	230.0	1.00	390
MS75084- SERIES 1025 IRON CORE (LT10K)									
1025-22K	1		1.2	±10%	25	7.9	150.0	0.18	620
1025-24K	2		1.5	±10%	28	7.9	140.0	0.22	560
1025-26K	3		1.8	±10%	30	7.9	125.0	0.30	480
1025-28K	4		2.2	±10%	30	7.9	115.0	0.40	415
1025-30K	5		2.7	±10%	37	7.9	100.0	0.55	355
1025-32K	6		3.3	±10%	45	7.9	90.0	0.85	285
1025-34K	7		3.9	±10%	45	7.9	80.0	1.00	263
1025-36K	8		4.7	±10%	45	7.9	75.0	1.20	239
1025-38K	9		5.6	±10%	50	7.9	65.0	1.80	195
1025-40K	10		6.8	±10%	50	7.9	60.0	2.00	185
1025-42K	11		8.2	±10%	55	7.9	55.0	2.70	160
1025-44K	12		10.0	±10%	55	7.9	50.0	3.30	144
1025-46K	13		12.0	±10%	45	2.5	40.0	2.70	160
1025-48K	14		15.0	±10%	45	2.5	35.0	2.80	157
1025-50K	15		18.0	±10%	50	2.5	30.0	3.10	149
1025-52K	16		22.0	±10%	50	2.5	25.0	3.30	144
1025-54K	17		27.0	±10%	50	2.5	20.0	3.50	140
MS75085- SERIES 1025 FERRITE CORE (LT10K)									
1025-56K	1		33.0	±10%	45	2.5	24.0	3.40	130
1025-58K	2		39.0	±10%	45	2.5	22.0	3.60	125
1025-60K	3		47.0	±10%	45	2.5	20.0	4.50	110
1025-62K	4		56.0	±10%	45	2.5	18.0	5.70	100
1025-64K	5		68.0	±10%	50	2.5	15.0	6.70	92
1025-66K	6		82.0	±10%	50	2.5	14.0	7.30	88
1025-68K	7		100.0	±10%	50	2.5	13.0	8.00	84
1025-70K	8		120.0	±10%	30	0.79	12.0	13.00	66
1025-72K	9		150.0	±10%	30	0.79	11.0	15.00	61
1025-74K	10		180.0	±10%	30	0.79	10.0	17.00	57
1025-76K	11		220.0	±10%	30	0.79	9.0	21.00	52
1025-78K	12		270.0	±10%	30	0.79	8.0	25.00	47
1025-80K	13		330.0	±10%	30	0.79	7.0	28.00	45
1025-82K	14		390.0	±10%	30	0.79	6.5	35.00	40
1025-84K	15		470.0	±10%	30	0.79	6.0	42.00	36
1025-86K	16		560.0	±10%	30	0.79	5.0	46.00	35
1025-88K	17		680.0	±10%	30	0.79	4.2	60.00	30
1025-90K	18		820.0	±10%	30	0.79	3.8	65.00	29
1025-92K	19		1000.0	±10%	30	0.79	3.4	72.00	28
Parts listed above are QPL/MIL qualified									
SERIES 1026 PHENOLIC CORE (LT4K)									
1026-00M			0.022	±20%	50	50.0	900.0	0.010	3800
1026-02K			0.027	±10%	40	25.0	875.0	0.030	2200
1026-04K			0.033	±10%	40	25.0	850.0	0.035	2000
1026-06K			0.039	±10%	40	25.0	825.0	0.040	1900
1026-08K			0.047	±10%	40	25.0	800.0	0.045	1800
1026-10K			0.056	±10%	40	25.0	775.0	0.050	1700
1026-12K			0.068	±10%	40	25.0	750.0	0.060	1500
1026-14K			0.082	±10%	40	25.0	725.0	0.070	1400
Optional Tolerances: J = 5% H = 3% G = 2% F = 1%									

RF INDUCTORS