

Wideband Transformers for Critical Applications



- Miniature wideband transformer: 4 mm square 3 mm high
- 300 V interwinding isolation, 1/4 Watt RF input power
- 250 mA max current rating

Core material Ferrite

Terminations Tin-silver-copper over silver-platinum-glass frit. Other terminations available at additional cost.

Ambient temperature -40°C to +85°C

Storage temperature Component: -55°C to +85°C.
Tape and reel packaging: -55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 750/7" reel; 3000/13" reel Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 2.9 mm pocket depth

Part number ¹	Schem.	Impedance ratio ² pri:sec	Bandwidth (MHz)	Insertion loss max (dB)	Pins 1-3 (primary)		Pins 4-6 (secondary)		DC imbalance ⁵ max (mA)
					L min ³ (μH)	DCR max ⁴ (mOhm)	L min ³ (μH)	DCR max ⁴ (mOhm)	
ST458RFW01A1LZ	A	1:1	0.400–600	0.40	10	120	10	120	—
ST458RFW01B1LZ	B	1:1	0.250–750	0.58	9.5	75	9.5	75	36
ST458RFW02B1LZ	B	1:2	0.200–500	0.50	10	120	20	150	8.5
ST458RFW03B1LZ	B	1:3	0.300–900	0.60	9.0	100	27	150	8.5
ST458RFW04B1LZ	B	1:4	0.250–750	1.0	9.0	55	36	120	30
ST458RFW04B2LZ	B	1:4	1.500–1200	2.0	2.0	50	8.0	100	15
ST458RFW04B3LZ	B	1:4	0.500–1000	0.90	5.0	80	20	120	10
ST458RFW04B4LZ	B	1:4	0.300–700	0.65	9.0	80	36	200	7.5
ST458RFW08B1LZ	B	1:8	0.150–600	0.60	22	120	176	310	17
ST458RFW09B1LZ	B	1:9	0.300–500	0.54	9.0	80	81	230	5.0
ST458RFW16B1LZ	B	1:16	0.600–300	0.80	5.0	80	80	230	5.0
ST458RFW04C1LZ	C	1:4	0.250–800	1.0	9.0	60	36	120	30

1. When ordering, please specify **termination and testing** codes:


ST458RFW04C1LZ

Termination: L = Tin-silver-copper (95.5/4/0.5) over silver palladium-platinum-glass frit.
Special order: S = Tin-lead (63/37).

Testing: Z = COTS
H = Screening per Coilcraft CP-SA-10001




- Impedance ratio is for the full primary winding to the full secondary winding.
 - Inductance measured at 100 kHz, 0.1 V, 0 Adc on an Agilent/HP 4192 or equivalent.
 - DCR measured on a micro-ohmmeter.
 - DC imbalance is the maximum difference in current measured at pins 4 and 6 with the source at pin 5. Inductance drop is 15% at maximum imbalance.
 - Electrical specifications at 25°C. Measurements are referenced to 50 Ohms.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Schematics

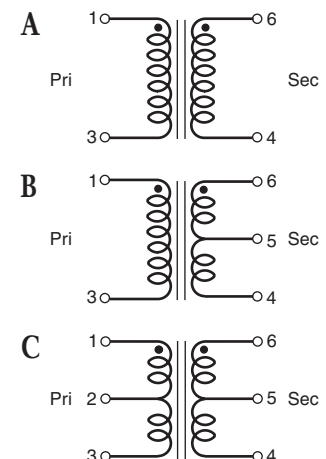













ST458RFW Wideband Transformers for Critical Applications

Dimensions

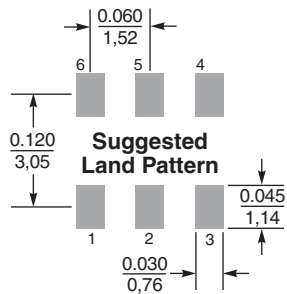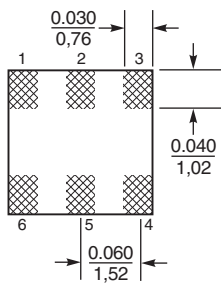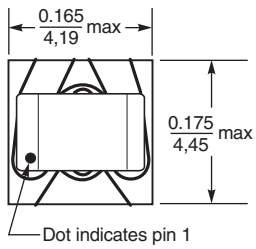

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

ST458RFW Wideband Transformers for Critical Applications

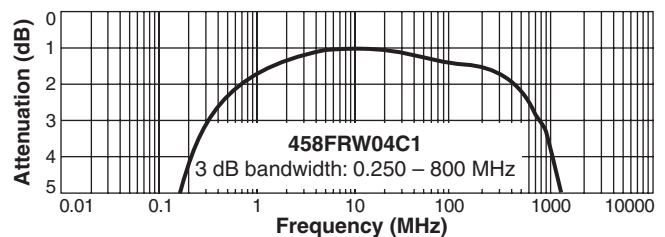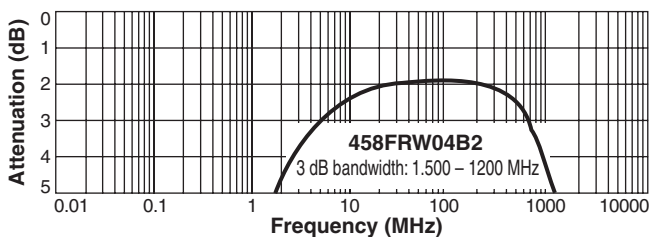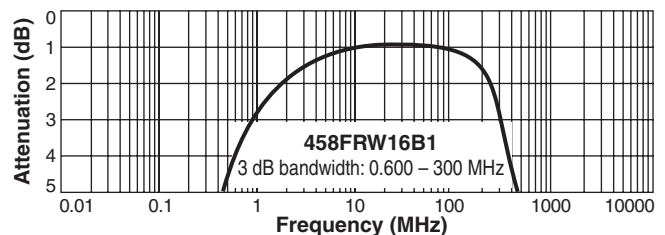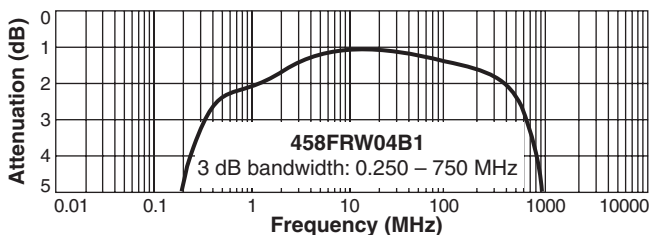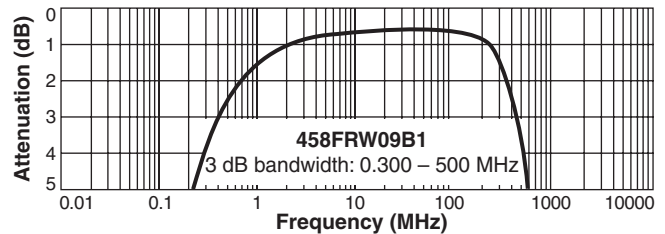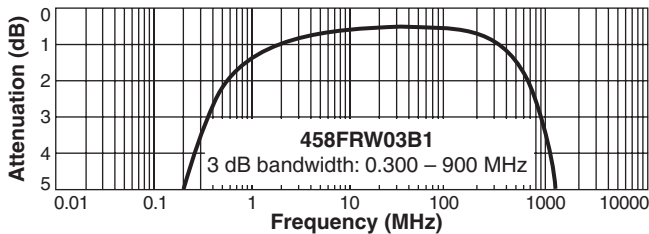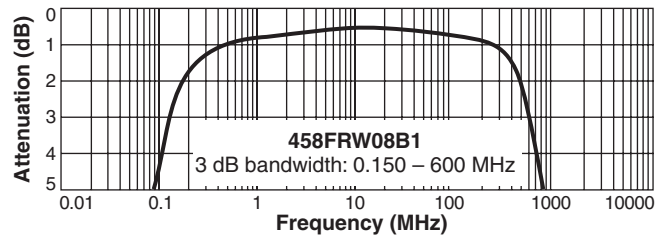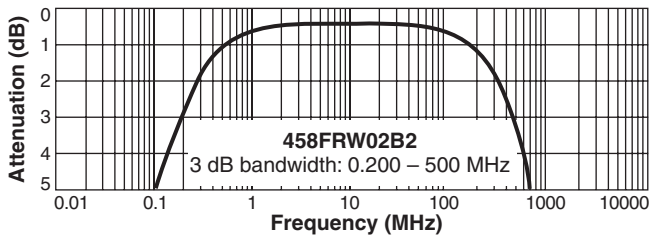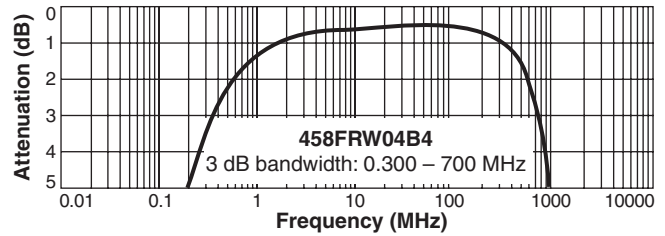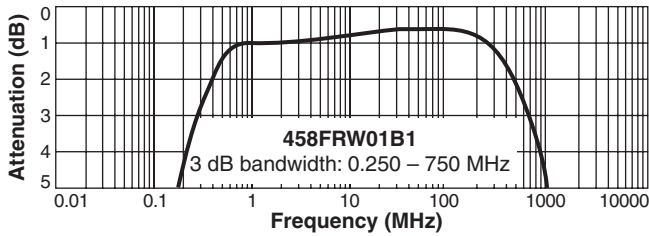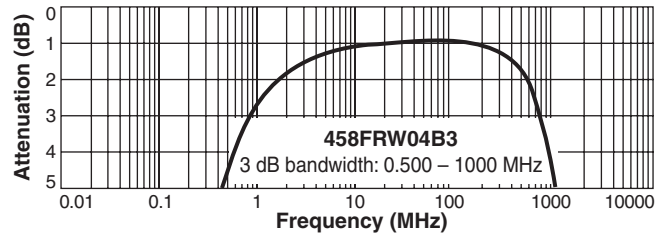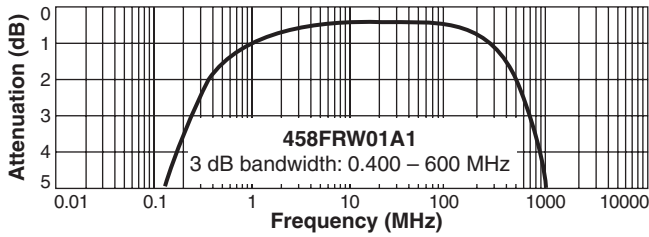

Attenuation measured on a network analyzer (re: 50 Ohms)