

Features

- Two 5.25" and one 3.5" HDD drive bays
- Desktop or wallmount industrial computer chassis
- Equipped with PS/2 type power supply







Specifications

| Standard Color | Beige color | |
|------------------------|--|--|
| Construction | Heavy-duty steel | |
| Drive Capacity | Exposed 2 x 5.25" HDD drive bay and 1 x 3.5" HDD drive bay | |
| Cooling | 1 x 12 cm ball-bearing fan (88 CFM/each) with a removable filter | |
| Front Panel Indicators | 1 x power on/off; 1 x HDD | |
| Front Panel Controls | 1 x power on/off, 1 x system reset | |
| Front Panel Connectors | 2 x USB | |
| Pre-punched Panel Rear | 1 x 9-pin ; 1 x 25-pin | |
| System Board | Full-size SBCs | |
| | | |

| Expansion Interface | 8-slot backplane |
|--|---------------------------------------|
| Power Supply | PS/2 power supply |
| Speaker | 1 x 0.4W speaker |
| Operating Temperature Range | 0°C ~ 40°C (32°F ~ 104°F) |
| Dimensions 368.8 mm (14.52") (W) x 407.5 mm (16.04") (D) x 177 (6.98") (H) | |
| Weight (net/gross) | 10.5 kg (23.15 lb)/11.3 kg (24.92 lb) |

Power Supply Specifications

| Items | Watt | Input | Specifications Output | MTBF |
|---------------|-------------------|---------------------------------|---|------------------|
| PS300- XP2 | ATX 300W (PFC) | Slide Switch (115Vac/230Vac) | +5V @ 30/21.5A +12V @ 15A -12V @ 0.8A +33V @ 15/28A +5VSB @ 2A -5V @ 0.3A | 100,000 hours |
| PS400- XP2 | ATX 400W (PFC) | AC 90~264V (Auto) | +5V @ 20A +3.3V @ 20A +12V1 @ 16A +12V2 @ 16A -12V @ 0.5A +5VSB @ 2.5A | 100,000 hours |
| PS500- XP2 | ATX 500W (PFC) | AC 90~264V (Auto) | +5V @ 24A +3.3V @ 24A +12V @ 34A +12V1 @ 17A +12V2 @ 17A -12V @ 0.8A +5VSB @ 2.5A | 100,000 hours |

Ordering Information

| AX60552WB/X300 | With ATX 300W power supply | |
|---|----------------------------|--|
| AX60552WB/X400 | With ATX 400W power supply | |
| AX60552WB/X500 | With ATX 500W power supply | |
| *Specifications and certifications are based on options and may vary. | | |

Backplane Options

| PICMG 1.0 | | |
|--------------|---|---------|
| Models | Slots per Segment (ISA/PCI/PCIe/CPU) | Segment |
| ATX6022/8GP7 | 0/7/1 | Single |
| ATX6022/8 | 3/4/1 | Single |
| CMG 1.3 | | |

| TCIVIU | 1.5 | |
|--------|-----|--|
| | | |

| Models | Slots per Segment (ISA/PCI/PCIe/CPU) | Segment |
|--------|---|---------|
| FAB111 | 0/4/2/1 | Single |
| FAB208 | 0/6/1/1 | Single |
| HAB208 | 0/6/1/1 | Single |
| FAB116 | 0/3/4/1 | Single |
| | | |

Embedded

Embedded Systems for Transportation

Embedded Field Controllers

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis


Backplanes

Power Supplies

Appendix

Peripherals & Accessories

Dimensions

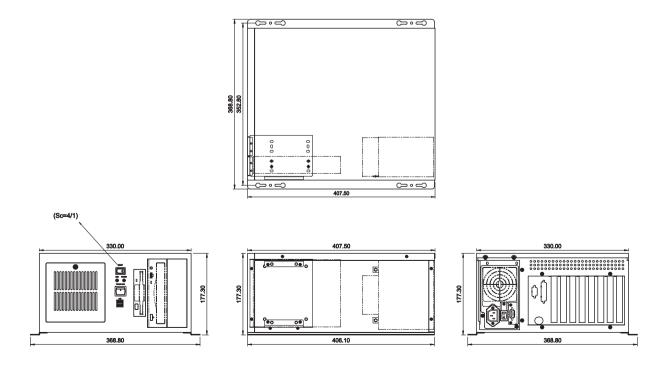

* All specifications and photos are subject to change without notice. © 2013 Axiomtek Co., Ltd. All rights reserved.

356