



## 10 Watt F-Series Adapter with Interchangeable AC Clips Battery Charging Adapter Meets Level V Efficiency Requirements



### Features

- Folding Blades
- Constant Current for Battery Charging
- 15mm Thick with Blades Folded
- Interchangeable AC Clips
- Level V Efficiency Compliant
- No load power draw <0.15W

### Applications

- Tablets
- Networking Equipment
- Personal Electronics
- Peripherals

### Safety Approvals

- cUL/UL
- C-Tick
- CE
- SAA

### Mechanical Characteristics

- Length: 60mm (2.36in)
- Width: 47mm (1.85in)
- Height: 15.0mm (0.59in)
- Weight: 38.5g (1.36oz)

### Output Specifications

Model	DC Output Voltage			Load		Efficiency Level
	Min.	Typ.	Max.	Min.	Max.	
PSA10F-050Q	4.75V	5V	5.25V	0A	2A	V
PSA10F-050Q(D) <sup>1</sup>	4.75V	5V	5.25V	0A	2A	V

Notes (1): D model output to compensate for DC drops in the USB cable by 400mV at full load

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at [www.phihong.com](http://www.phihong.com) for the most up-to-date specifications and contact information.

**INPUT:**

**AC Input Voltage Range**  
90 to 264V AC

**AC Input Voltage Rating**  
100 to 240V AC

**AC Input Frequency**  
47 to 63Hz

**AC Input Current**  
0.3A RMS maximum at 120V AC  
0.15A RMS maximum at 240V AC

**Leakage Current**  
100uA maximum at 240V AC

**Inrush Current**  
60A at 240V AC

**OUTPUT:**  
**Output Power**  
10W Continuous

**Efficiency**  
79% minimum, meets Level V Requirements

**Standby Power**  
<150mW at 230VAC

**Ripple and Noise**  
100mVp-p at 0A-1A load  
200mVp-p at 1A-2A load


**Current Limit**  
2.5A when less than 3V (auto-restart)

**ENVIRONMENTAL:**

**Temperature**

Operating	0 to 40C
Non-operating	-40 to +85C
Humidity	10 to 90%

**Dimension Diagram Unit: mm**

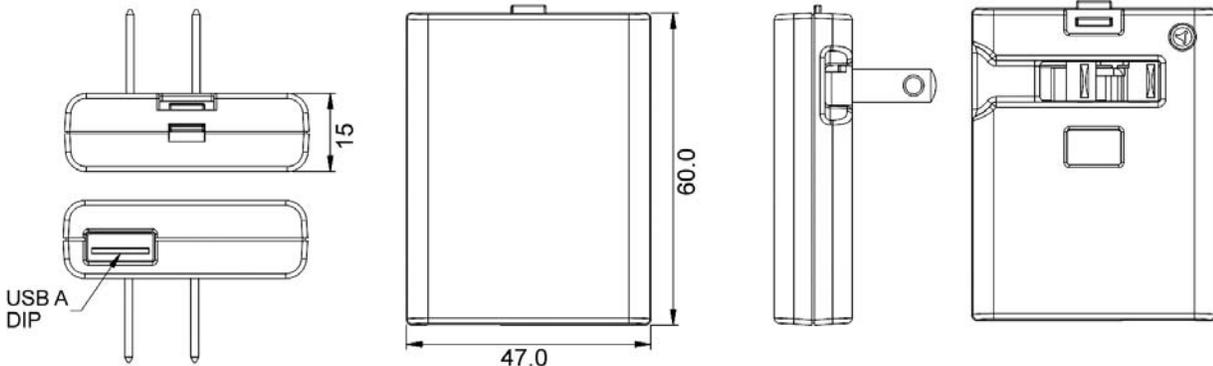

**EMI**

FCC Class B, EN55022 Class B

**Immunity**

ESD:	EN61000-4-2	Level 3
Radiated:	EN61000-4-3	Level 2
EFT:	EN61000-4-4	Level 2
Surge:	EN61000-4-5	Level 3
C/T:	EN61000-4-6	Level 2
PFMT:	EN61000-4-8	
VDT:	EN61000-4-11	
Harmonic:	EN61000-3-2	Class A
Flicker:	EN61000-3-3	

**Dielectric Withstand (HI-POT) Test**

Primary to secondary: 3000V AC, 10mA, 60 seconds

**Insulation Resistance**

Primary to secondary: 500V >7M OHM

**FEATURES:**

**Over Voltage Protection**  
Auto-restart 6.3V maximum

**Short Circuit Protection**  
Must withstand continuous short circuit

**Over Temperature Protection**  
Auto shutdown without fault

**DC Output**  
USB A

**AC Input**  
US Fixed Blade folding prong

**Interchangeable AC Clips (fit over US prongs)**  
FPBAG-H (FPE, FPK, FPS)

FPB:	Brazil	FPI:	India
FPC:	China	FPK:	UK
FPE:	Europe	FPN:	Argentina
FPH:	Korea	FPS:	Australia

(Sold Separately)