




- Cw/w: 35PF Max TX & RX @100KHz, 0.2V
- LL: 0.6μH Max TX & RX @ 100KHz, 0.2V
- Primary Pins: TX: 1-3, 6-8  
RX: 4-5, 9-10
- Polarity: 1-20, 4-17, 6-15, 9-12 In-Phase
- Operating Temp: -40°C to +85°C

Electrical Specifications @ 25°C

Part Number	OCL(μH Min TX & RX) @ 100KHz, 100mV	Turns Ratio chip: cable (±2%)	Isolation HI-POT (Vrms)
	With 8mA DC Bias		
AHTA-2009I	1200	1:2(TX)/1:1(RX)	1500

All specifications subject to change without notice.

MECHANICAL

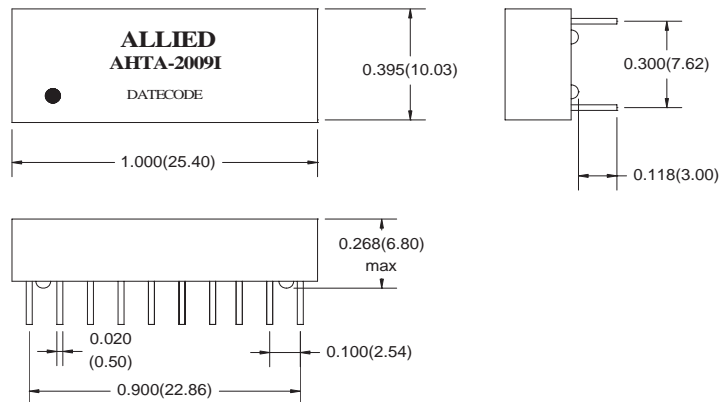

Dimensions:inch( mm)  
Unless otherwise specified, all tolerances are ±0.010(0.25)

SCHEMATICS

