


Piezo Buzzer (DC)

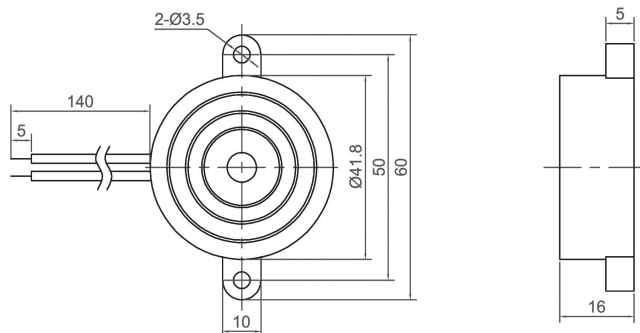


CPB4216

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB4216HC28BW	1.5 ~ 20	12	10	96 at 30cm	2800 ± 500	Continuous	-20 ~ +60	ABS	12
CPB4216HF28BW	3 ~ 28	12	9	90 at 30cm	2800 ± 500	Fast Pulse	-20 ~ +60	ABS	15
CPB4216HS28BW	3 ~ 28	12	9	90 at 30cm	2800 ± 500	Slow Pulse	-20 ~ +60	ABS	15


CANOPUS



CPB4220

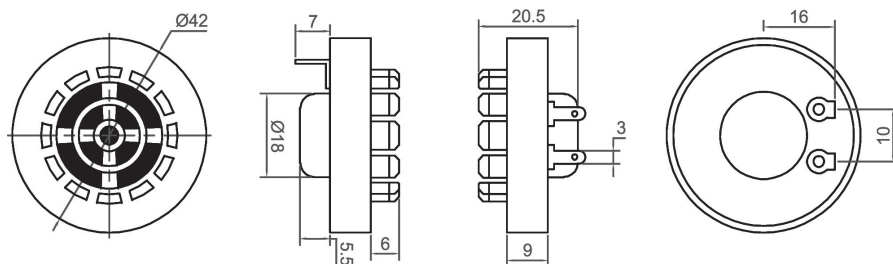

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB4220IC29YE	1 ~ 28	24	15	85 at 30cm	2900 ± 500	Continuous	-20 ~ +60	Nylon	18

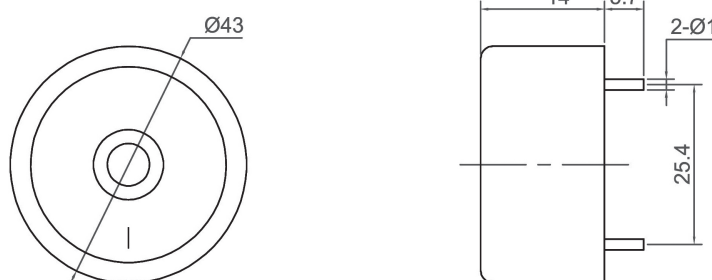

CPB4314

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB4314HC28BP	3 ~ 20	12	12	100 at 30cm	2800 ± 500	Continuous	-20 ~ +60	ABS	11

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216