

ATM 25.6 MBPS INTERFACE TRANSFORMER

Turns Ratio ($\pm 2\%$)	1 : 1 & 2CT : 1
---------------------------	-----------------

SEEQ 93C95 PHY interface.
The transformer provides impedance matching for 100 Ω UTP applications.

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance	3.0		mH
Leakage Inductance		1.6	μ H
Interwinding Capacitance ($C_{w/w}$)		55	pF
Primary DC Resistance		1.3	ohms
Secondary DC Resistance		1.3/0.65	ohms


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 34 pieces per tube


Test Conditions: 100mV @ 100 KHz

Dimensions in inches (mm):

Available on
Tape & Reel

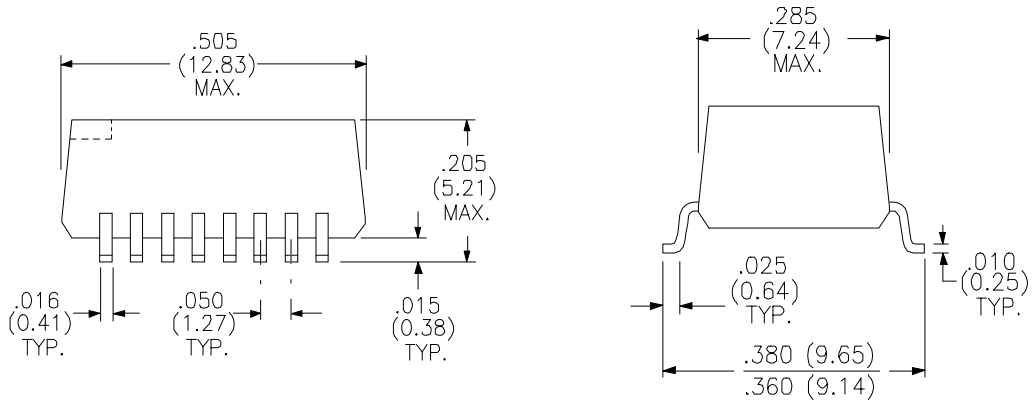

SCHMATIC

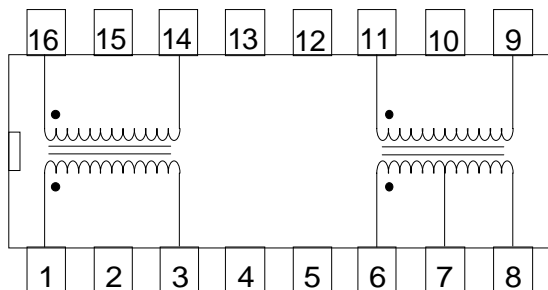

RHOMBUS P/N: T-11229	
CUST P/N:	NAME:
DATE: 04/06/01	SHEET: 1 OF 1