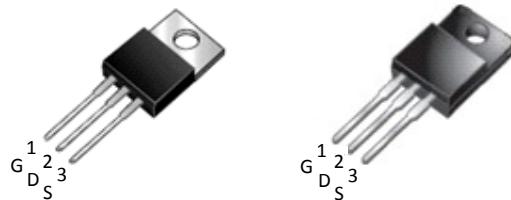


650V / 12A N-Channel Enhancement Mode MOSFET	650V, $R_{DS(ON)}=0.8\Omega$@$V_{GS}=10V$, $I_D=6.0A$
---	---

Features

- Low ON Resistance
- Fast Switching
- Low Gate Charge & Low C_{RSS}
- Fully Characterized Avalanche Voltage and Current
- Specially Designed for AC Adapter, Battery Charger and SMPS
- In compliance with EU RoHS 2002/95/EC Directives

**Mechanical Information**


- Case: TO-220AB / ITO-220AB Molded Plastic
- Terminals : Solderable per MIL-STD-750, Method 2026

TO-220AB

ITO-220AB

Marking & Ordering Information

TYPE	MARKING	PACKAGE	PACKING
HY12N65T	12N65T	TO-220AB	50PCS/TUBE
HY12N65FT	12N65FT	ITO-220AB	50PCS/TUBE

**Absolute Maximum Ratings ($T_c=25^\circ C$ unless otherwise noted)**

Parameter	Symbol	HY12N65T	HY12N65FT	Units
Drain-Source Voltage	V_{DS}	650		V
Gate-Source Voltage	V_{GS}	± 30		V
Continuous Drain Current	I_D	12	12	A
Pulsed Drain Current ¹⁾	I_{DM}	48	48	A
Maximum Power Dissipation Derating Factor	$T_c=25^\circ C$	P_D 175 1.4	52 0.42	W
Avalanche Energy with Single Pulse $I_{AS}=12A$, $VDD=90V$, $L=10.5mH$	E_{AS}	760		mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150		°C

Note : 1. Maximum DC current limited by the package

Thermal Characteristics

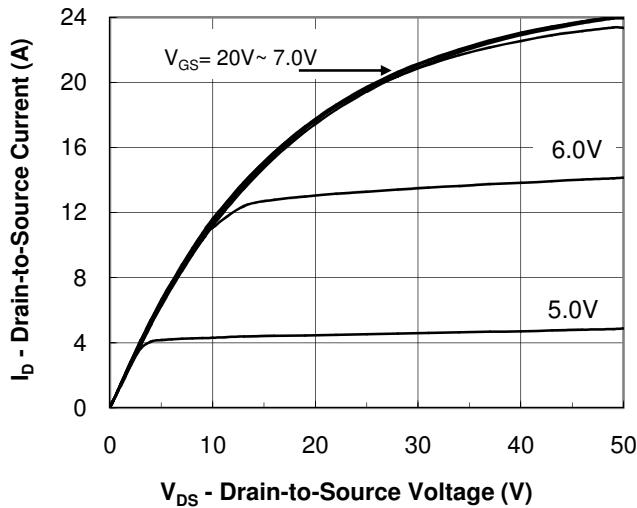
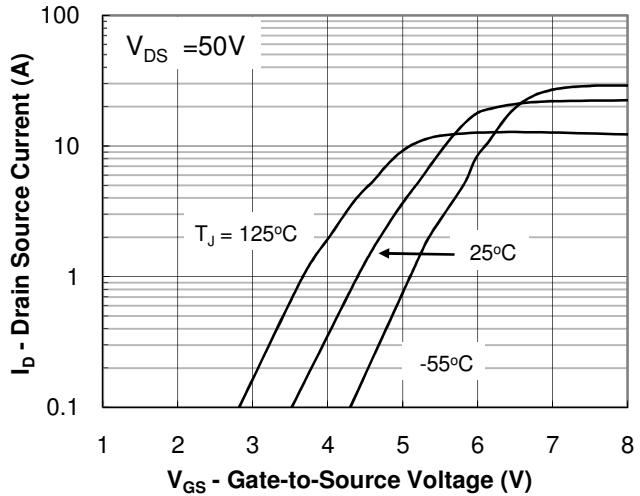
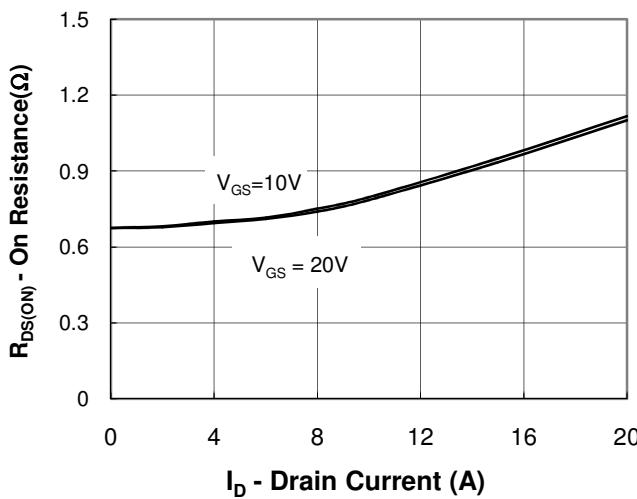
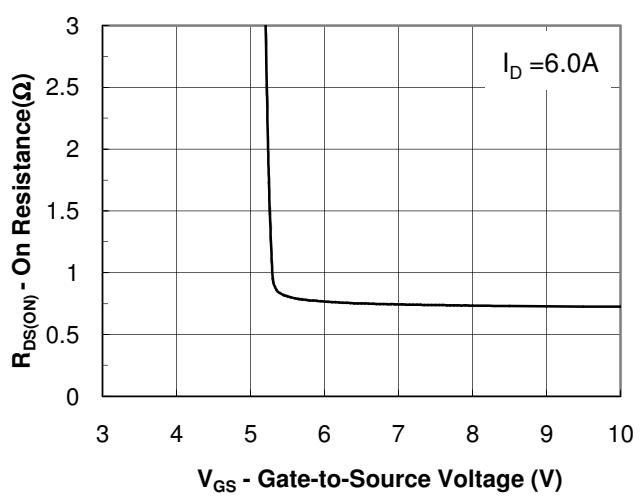
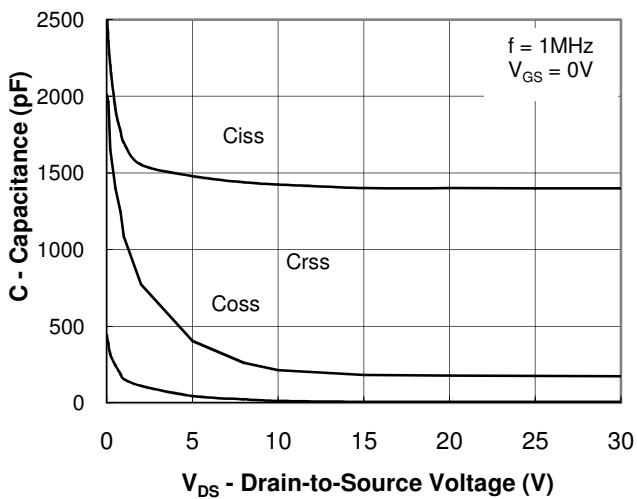
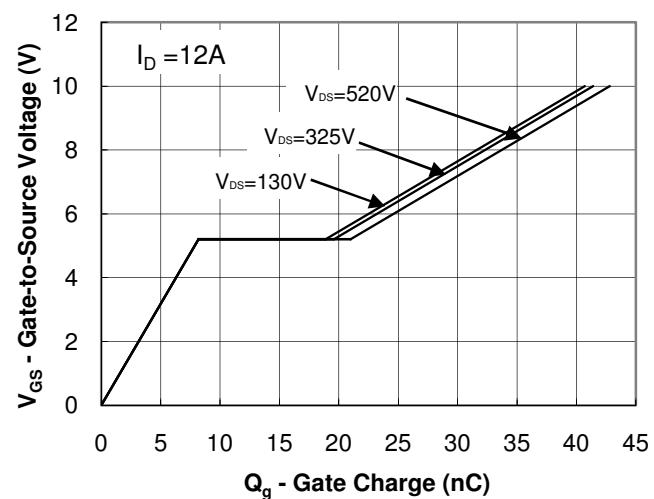
PARAMETER	Symbol	HY12N65T	HY12N65FT	Units
Junction-to-Case Thermal Resistance	$R_{\theta JC}$	0.7	2.4	°C/W
Junction-to Ambient Thermal Resistance	$R_{\theta JA}$	62.5	100	°C/W

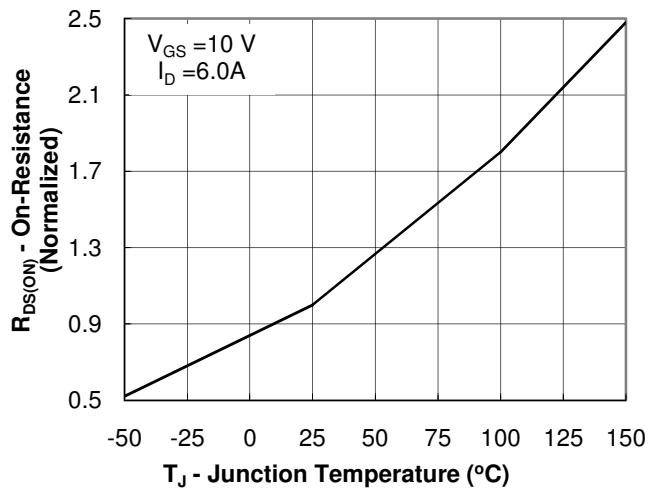
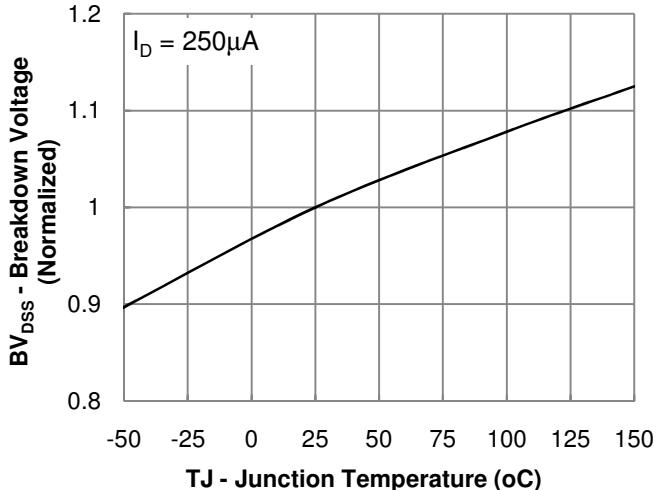
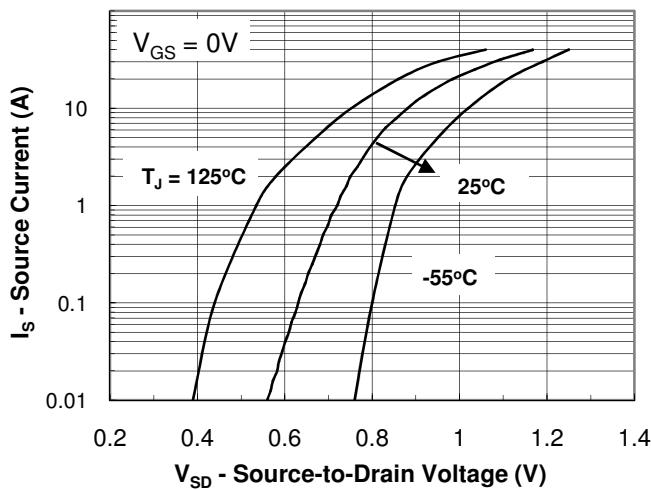
COMPANY RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE

Electrical Characteristics ($T_c=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	650	-	-	V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2.0	-	4.0	V
Drain-Source On-State Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=6.0\text{A}$	-	0.69	0.8	Ω
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}}=650\text{V}, V_{\text{GS}}=0\text{V}$	-	-	10	μA
Gate Body Leakage	I_{GSS}	$V_{\text{GS}}=\pm 30\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Dynamic						
Total Gate Charge	Q_g	$V_{\text{DS}}=520\text{V}, I_{\text{D}}=12\text{A}, V_{\text{GS}}=10\text{V}$	-	42.6	52	nC
Gate-Source Charge	Q_{gs}		-	8.2	-	
Gate-Drain Charge	Q_{gd}		-	12.8	-	
Turn-On Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=325\text{V}, I_{\text{D}}=12\text{A}$ $V_{\text{GS}}=10\text{V}, R_{\text{G}}=25\Omega$	-	14.6	20	ns
Turn-On Rise Time	t_r		-	22.6	32	
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$		-	65.2	85	
Turn-Off Fall Time	t_f		-	22.8	36	
Input Capacitance	C_{iss}	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}$ $f=1.0\text{MHz}$	-	1400	2050	pF
Output Capacitance	C_{oss}		-	175	210	
Reverse Transfer Capacitance	C_{rss}		-	5.5	12	
Source-Drain Diode						
Max. Diode Forward Current	I_s	-	-	-	12	A
Max. Pulsed Source Current	I_{SM}	-	-	-	48	A
Diode Forward Voltage	V_{SD}	$I_s=12\text{A}, V_{\text{GS}}=0\text{V}$	-	-	1.4	V
Reverse Recovery Time	t_{rr}	$V_{\text{GS}}=0\text{V}, I_F=12\text{A}$ $di/dt=100\text{A}/\mu\text{s}$	-	460	-	ns
Reverse Recovery Charge	Q_{rr}		-	4.6	-	μC

NOTE : Plus Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

Typical Characteristics Curves ($T_C=25^\circ\text{C}$, unless otherwise noted)
**Fig.1 Output Characteristic****Fig.2 Transfer Characteristic****Fig.3 On-Resistance vs Drain Current****Fig.4 On-Resistance vs Gate to Source Voltage****Fig.5 Capacitance Characteristic****Fig.6 Gate Charge Characteristic**

Typical Characteristics Curves ($T_C=25^\circ\text{C}$, unless otherwise noted)**Fig.7 On-Resistance
vs Junction Temperature****Fig.8 Breakdown Voltage
vs Junction Temperature****Fig.9 Body Diode
Forward Voltage Characteristic**