



# BAT54TG

## SURFACE MOUNT SCHOTTKY BARRIER


**VOLTAGE** 30 Volts **CURRENT** 0.20 Amperes

### FEATURES

- Low turn-on voltage
- Fast switching
- PN Junction Guard Ring for Transient and ESD Protection.
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA

- Case: SOD-723, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00077 gram

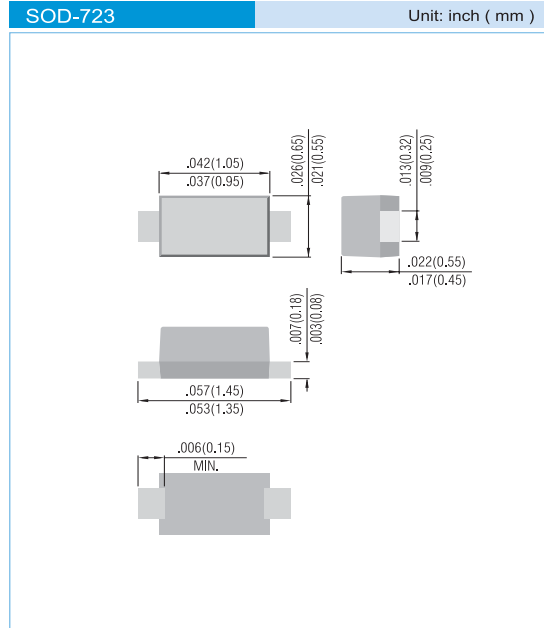

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. For capacitive load, derate current by 20%.

Parameter	Symbol	BAT54TG	Units
Marking Code	-	BA	
Peak Repetitive Reverse Voltage	$V_{RRM}$	30	V
Maximum Average Forward Current at $T_A=75^\circ\text{C}$	$I_{F(AV)}$	0.2	A
Peak Forward Surge Current, 1.0s single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	0.6	A
Maximum Instantaneous Forward Voltage	$V_F$	0.32 @ $I_F=0.001\text{A}$ 1.0 @ $I_F=0.1\text{A}$	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	0.002 @ $V_R=25\text{V}$	mA
Junction Capacitance at $V_R=1\text{V}$	$C_J$	10	pF
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	667	k / W
Operating Junction Temperature Range	$T_J$	-55 TO +125	°C
Storage Temperature Range	$T_{STG}$	-55 TO +125	°C



# BAT54TG

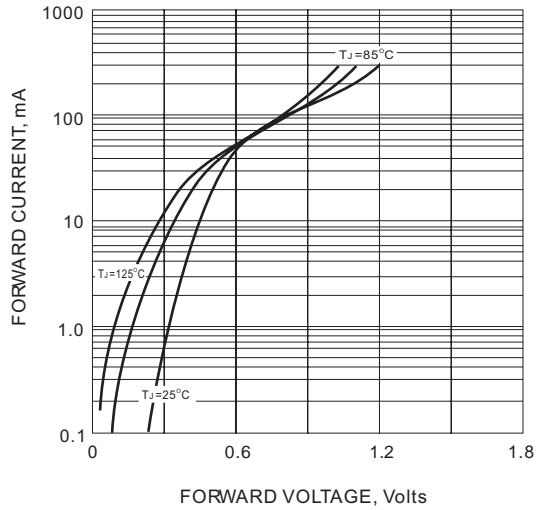


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

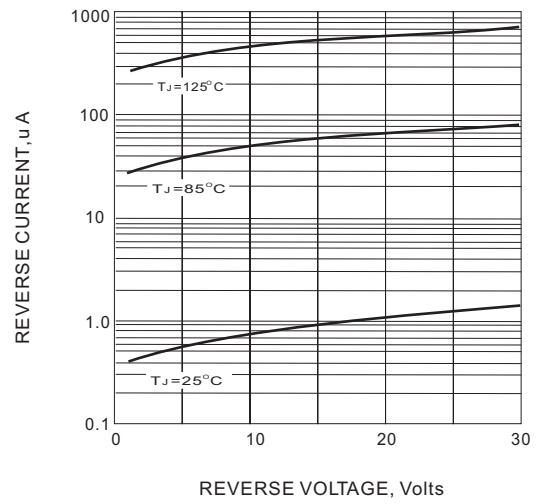


FIG. 2-TYPICAL REVERSE CHARACTERISTICS

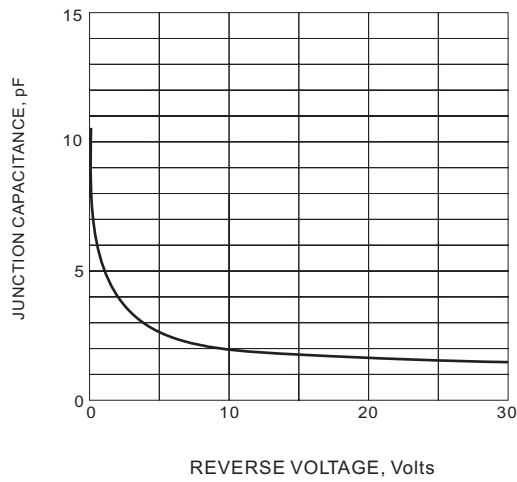


FIG. 3 TYPICAL JUNCTION CAPACITANCE

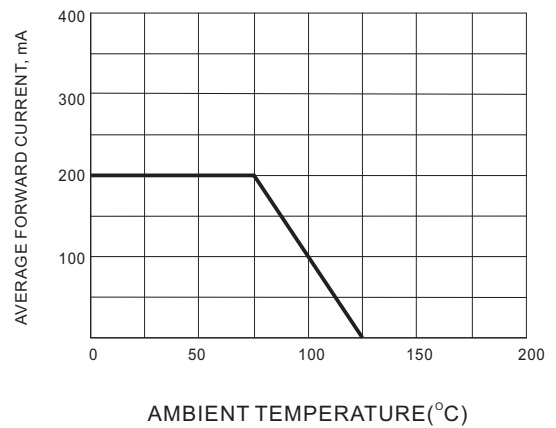


FIG. 4 FORWARD CURRENT DERATING




# BAT54TG

## MOUNTING PAD LAYOUT

SOD-723

Unit: inch ( mm )

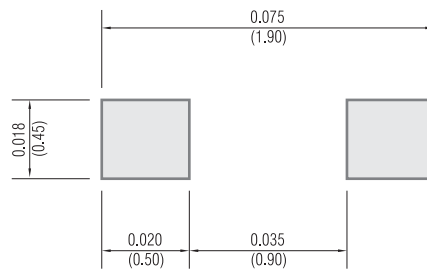

## ORDER INFORMATION

- Packing information

T/R - 8K per 7" plastic Reel

## LEGAL STATEMENT

### Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.