


Inductors


Commercial, Molded

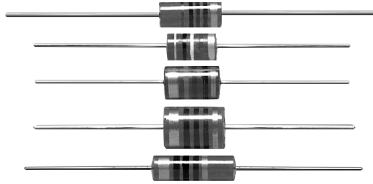

FEATURES

- High Q and SRF.
- Non standard tolerances are also available in all types.
- Maximum protection with minimum size as a result of full encapsulation in a thermo-setting mineral filled plastic jacket.
- Assured uniformity of product, a result of stringent quality control and inspection procedures at every production stage.

DIMENSIONS in inches [millimeters]



MODEL	A	B	C
IM-10-22	0.560 ± 0.010 [14.22 ± 0.254]	#22 AWG 0.025 ± 0.002 [0.635 ± 0.051] (0.47µH thru 39µH) #21 AWG 0.028 ± 0.002 [0.711 ± 0.051] (1100µH thru 3600µH)	0.220 ± 0.010 [5.59 ± 0.254]
IM-10-28	0.940 ± 0.010 [23.88 ± 0.254]	#21 AWG 0.028 ± 0.002 [0.711 ± 0.051]	0.280 ± 0.010 [7.11 ± 0.254]
IM-10-31	0.560 ± 0.010 [14.22 ± 0.254]	#21 AWG 0.028 ± 0.002 [0.711 ± 0.051]	0.310 ± 0.010 [7.87 ± 0.254]
IM-10-37	0.625 ± 0.010 [15.88 ± 0.254]	#21 AWG 0.028 ± 0.002 [0.711 ± 0.051]	0.375 ± 0.010 [9.52 ± 0.254]
IM-10-46	0.687 ± 0.010 [17.45 ± 0.254]	#21 AWG 0.028 ± 0.002 [0.711 ± 0.051]	0.468 ± 0.010 [11.89 ± 0.254]

INDUCTANCE RANGE

MODEL	INDUCTANCE RANGE		CORE MATERIAL	MAXIMUM OPERATING TEMPERATURE
	FROM	TO		
IM-10-22	0.47µH	4.7µH	Phenolic	+ 125°C
	5.6µH	39µH	Iron	+ 105°C
	1100µH	3600µH	Iron	+ 105°C
IM-10-28	1.2µH	18µH	Phenolic	+ 125°C
	22µH	120µH	Iron	+ 105°C
IM-10-31	180µH	390µH	Iron	+ 105°C
IM-10-37	470µH	1000µH	Iron	+ 105°C
IM-10-46	1500µH	10000µH	Iron	+ 105°C

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	IND. (µH)	TOL.	PREVIOUS PART NO.	Q MIN.	TEST FREQ. (MHz)	SELF-RESONANT FREQ. MIN. (MHz)	DCR @ + 25°C MAX. (Ohms)	RATED DC CURRENT (mA)	PHENOLIC CORE
IM-10-22	0.47	± 10%	4412-1K	65	25	300	0.06	1970	
IM-10-22	0.56	± 10%	4412-2K	65	25	270	0.07	1850	
IM-10-22	0.68	± 10%	4412-3K	65	25	240	0.08	1700	
IM-10-22	0.82	± 10%	4412-4K	65	25	220	0.11	1450	
IM-10-22	1.0	± 10%	4412-5K	65	25	200	0.14	1290	
IM-10-22	1.2	± 10%	4412-6K	40	7.9	180	0.19	1120	
IM-10-22	1.5	± 10%	4412-7K	40	7.9	160	0.28	925	
IM-10-22	1.8	± 10%	4412-8K	40	7.9	150	0.37	790	
IM-10-22	2.2	± 10%	4412-9K	40	7.9	135	0.50	680	
IM-10-22	2.7	± 10%	4411-10K	40	7.9	120	0.65	600	
IM-10-22	3.3	± 10%	4412-11K	40	7.9	105	1.00	480	
IM-10-22	3.9	± 10%	4412-12K	40	7.9	100	1.20	440	
IM-10-22	4.7	± 10%	4412-13K	40	7.9	90	1.80	360	



STANDARD ELECTRICAL SPECIFICATIONS									
MODEL	IND. (μH)	TOLERANCE	PREVIOUS PART NO.	Q MIN.	TEST FREQUENCY (MHZ)	SELF-RESONANT FREQ. MIN. (MHZ)	DCR @ + 25°C MAX. (Ohms)	RATED DC CURRENT (mA)	
IM-10-22	5.6	± 10%	4422-1K	35	7.9	55	0.13	885	IRON CORE
IM-10-22	6.8	± 10%	4422-2K	35	7.9	50	0.20	710	
IM-10-22	8.2	± 10%	4422-3K	35	7.9	44	0.22	680	
IM-10-22	10	± 10%	4422-4K	35	7.9	42	0.26	625	
IM-10-22	12	± 10%	4422-5K	45	2.5	34	0.45	465	
IM-10-22	15	± 10%	4422-6K	45	2.5	32	0.52	442	
IM-10-22	18	± 10%	4422-7K	50	2.5	28	0.70	380	
IM-10-22	22	± 10%	4422-8K	60	2.5	24	1.00	326	
IM-10-22	27	± 10%	4422-9K	60	2.5	22	1.30	275	
IM-10-22	33	± 10%	4422-10K	60	2.5	20	1.50	258	
IM-10-22	39	± 10%	4422-11K	70	2.5	18	2.00	224	
IM-10-22	1100	± 5%	1312-20J	60	0.25	2.8	21.0	78	IRON CORE
IM-10-22	1200	± 5%	1312-21J	60	0.25	2.7	22.0	76	
IM-10-22	1300	± 5%	1312-22J	60	0.25	2.6	23.0	75	
IM-10-22	1500	± 5%	1312-23J	65	0.25	2.4	25.0	72	
IM-10-22	1600	± 5%	1312-24J	65	0.25	2.3	26.0	70	
IM-10-22	1800	± 5%	1312-25J	65	0.25	2.2	28.0	68	
IM-10-22	2000	± 5%	1312-26J	65	0.25	2.1	29.0	67	
IM-10-22	2200	± 5%	1312-27J	70	0.25	2.0	30.0	66	
IM-10-22	2400	± 5%	1312-28J	70	0.25	1.9	31.0	64	
IM-10-22	2700	± 5%	1312-29J	70	0.25	1.8	33.0	62	
IM-10-22	3000	± 5%	1312-30J	70	0.25	1.7	35.0	61	
IM-10-22	3300	± 5%	1312-31J	70	0.25	1.6	38.0	58	
IM-10-22	3600	± 5%	1312-32J	70	0.25	1.5	40.0	57	
IM-10-28	1.2	± 10%	4414-1K	60	7.9	170	0.075	2400	PHENOLIC CORE
IM-10-28	1.5	± 10%	4414-2K	60	7.9	160	0.090	2150	
IM-10-28	1.8	± 10%	4414-3K	60	7.9	140	0.135	1750	
IM-10-28	2.2	± 10%	4414-4K	60	7.9	125	0.160	1600	
IM-10-28	2.7	± 10%	4414-5K	60	7.9	115	0.220	1350	
IM-10-28	3.3	± 10%	4414-6K	60	7.9	100	0.305	1150	
IM-10-28	3.9	± 10%	4414-7K	60	7.9	95	0.450	955	
IM-10-28	4.7	± 10%	4414-8K	60	7.9	90	0.560	860	
IM-10-28	5.6	± 10%	4414-9K	60	7.9	80	0.745	745	
IM-10-28	6.8	± 10%	4414-10K	60	7.9	75	1.05	635	
IM-10-28	8.2	± 10%	4414-11K	60	7.9	68	1.40	550	
IM-10-28	10	± 10%	4414-12K	60	7.9	60	1.90	460	
IM-10-28	12	± 10%	4414-13K	40	2.5	53	2.65	395	
IM-10-28	15	± 10%	4414-14K	40	2.5	50	3.25	355	
IM-10-28	18	± 10%	4414-15K	40	2.5	45	4.15	315	
IM-10-28	22	± 10%	4424-1K	50	2.5	24	0.295	725	
IM-10-28	27	± 10%	4424-2K	45	2.5	22	0.350	660	
IM-10-28	33	± 10%	4424-3K	60	2.5	19	0.550	525	
IM-10-28	39	± 10%	4424-4K	55	2.5	18	0.650	485	
IM-10-28	47	± 10%	4424-5K	65	2.5	16	1.00	390	
IM-10-28	56	± 10%	4424-6K	65	2.5	14	1.15	360	
IM-10-28	68	± 10%	4424-7K	75	2.5	13	1.85	285	
IM-10-28	82	± 10%	4424-8K	75	2.5	12	2.10	265	
IM-10-28	100	± 10%	4424-9K	75	2.5	12	2.50	245	
IM-10-28	120	± 10%	4424-10K	95	0.79	10	4.10	195	
IM-10-31	180	± 10%	31A181K	80	0.79	6.0	5.5	148	IRON CORE
IM-10-31	220	± 10%	31A221K	80	0.79	5.5	5.9	145	
IM-10-31	270	± 10%	31A271K	80	0.79	5.1	6.6	138	
IM-10-31	330	± 10%	31A331K	75	0.79	4.2	7.8	122	
IM-10-31	390	± 10%	31A391K	75	0.79	3.9	8.7	118	
IM-10-37	470	± 10%	37A471K	80	0.79	3.7	9.0	125	IRON CORE
IM-10-37	560	± 10%	37A561K	80	0.79	3.5	10.0	118	
IM-10-37	680	± 10%	37A681K	75	0.79	3.2	11.2	112	
IM-10-37	820	± 10%	37A821K	75	0.79	3.0	13.0	105	
IM-10-37	1000	± 10%	37A102K	70	0.79	2.7	14.5	95	
IM-10-46	1500	± 10%	46A152K	85	0.25	2.2	22.0	84	IRON CORE
IM-10-46	2200	± 10%	46A222K	85	0.25	1.8	27.0	76	
IM-10-46	2700	± 10%	46A272K	85	0.25	1.6	32.0	69	
IM-10-46	5100	± 10%	46A512K	70	0.25	1.0	66.0	48	
IM-10-46	10000	± 10%	46A103K	70	0.25	0.8	70.0	47	

MARKING
— Color coded, see packaging

ORDERING INFORMATION		
IM-10-28	22μH	± 10%
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.