


# Torson 0.050" 1.27mm



## 20-5016-2XXX-20-001 – Receptacle - Right Angle

Part Number	No. of Positions	A	B	C Max.	Qty. Per Tube
20 5016 2004 20 001	4	1	1.27 (0.050)	2.84 (0.112)	200
2006	6	2	2.54 (0.100)	4.11 (0.162)	138
2008	8	3	3.81 (0.150)	5.38 (0.212)	105
2010	10	4	5.08 (0.200)	6.65 (0.262)	85
2012	12	5	6.35 (0.250)	7.92 (0.312)	71
2014	14	6	7.62 (0.300)	9.19 (0.362)	62
2016	16	7	8.89 (0.350)	10.46 (0.412)	54
2018	18	8	10.16 (0.400)	11.73 (0.462)	48
2020	20	9	11.43 (0.450)	13.00 (0.512)	43
2022	22	10	12.70 (0.500)	14.27 (0.562)	39
2024	24	11	13.97 (0.550)	15.54 (0.612)	36
2026	26	12	15.24 (0.600)	16.81 (0.662)	33
2028	28	13	16.51 (0.650)	18.08 (0.712)	31
2030	30	14	17.78 (0.700)	19.35 (0.762)	29
2032	32	15	19.05 (0.750)	20.62 (0.812)	27
2034	34	16	20.32 (0.800)	21.89 (0.862)	26
2036	36	17	21.59 (0.850)	23.16 (0.912)	24
2038	38	18	22.86 (0.900)	24.43 (0.962)	23
2040	40	19	24.13 (0.950)	25.70 (1.012)	22
2042	42	20	25.40 (1.000)	26.97 (1.062)	21
2044	44	21	26.67 (1.050)	28.24 (1.112)	20
2046	46	22	27.94 (1.100)	29.51 (1.162)	19
2048	48	23	29.21 (1.150)	30.78 (1.212)	18
20 5016 2050 20 001	50	24	30.48 (1.200)	32.05 (1.262)	17
20 5016 2052 20 001	52	25	31.75 (1.250)	33.32 (1.312)	17
2054	54	26	33.02 (1.300)	34.59 (1.362)	16
2056	56	27	34.29 (1.350)	35.86 (1.412)	15
2058	58	28	35.56 (1.400)	37.13 (1.462)	15
2060	60	29	36.83 (1.450)	38.40 (1.512)	14
2062	62	30	38.10 (1.500)	39.67 (1.562)	14
2064	64	31	39.37 (1.550)	40.94 (1.612)	13
2066	66	32	40.64 (1.600)	42.21 (1.662)	13
2068	68	33	41.91 (1.650)	43.48 (1.712)	13
2070	70	34	43.18 (1.700)	44.75 (1.762)	12
2072	72	35	44.45 (1.750)	46.02 (1.812)	12
2074	74	36	45.72 (1.800)	47.29 (1.862)	12
2076	76	37	46.99 (1.850)	48.56 (1.912)	11
2078	78	38	48.26 (1.900)	49.83 (1.962)	11
2080	80	39	49.53 (1.950)	51.10 (2.012)	11
2082	82	40	50.80 (2.000)	52.37 (2.062)	10
2084	84	41	52.07 (2.050)	53.64 (2.112)	10
2086	86	42	53.34 (2.100)	54.91 (2.162)	10
2088	88	43	54.61 (2.150)	56.18 (2.212)	10
2090	90	44	55.88 (2.200)	57.45 (2.262)	9
2092	92	45	57.15 (2.250)	58.72 (2.312)	9
2094	94	46	58.42 (2.300)	59.99 (2.362)	9
2096	96	47	59.69 (2.350)	61.26 (2.412)	9
2098	98	48	60.96 (2.400)	62.53 (2.462)	9
2100	100	49	62.23 (2.450)	63.80 (2.512)	8
20 5016 2102 20 001	102	50	63.50 (2.500)	65.07 (2.562)	8

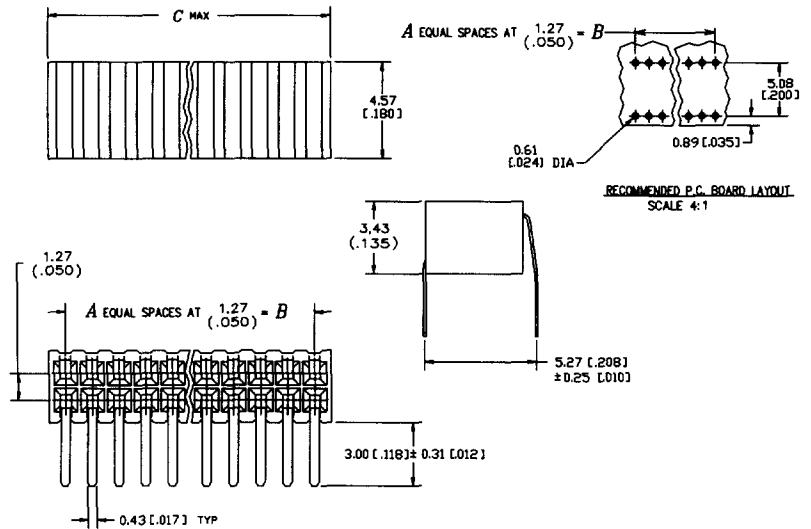

### Specifications

- Insulator Material – High temperature thermoplastic (UL 94 V-O)
- Contact Material – copper alloy
- Contact Plating – .000030–.000080 (0.00076–0.00203) nickel underplate all over  
.000015 (0.00038) min. gold in mating area  
.000075–.000150 (0.00191–0.00381) tin/lead on tails

### ORDERING CODE

