


503/504
Series:

Ø 8.1 mm Mounting (Sunlight Readable LEDs)

NEW PRODUCT

- Four colours including Blue
- Domed lens provides excellent viewing characteristics
- IP66 sealing
- MLG 10
- MTF 90,000hrs

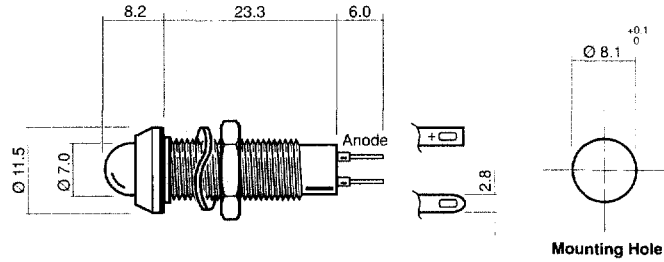

SCALE 1:1
DIMENSIONS IN MM (TYPICAL)

Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
503 - 502 - 04	Red	Coloured Diffused	2.1	20	250	660	180	-20 to +60	-30 to +85
503 - 521 - 04	Yellow		2.2	20	2500	590			
503 - 512 - 04	Green		2.2	20	100	563			
503 - 930 - 04	Blue		3.6	20	1000	450			
503 - 502 - 20	Red		5/6	15/20	250	660			
503 - 521 - 20	Yellow		5/6	15/20	2500	590			
503 - 512 - 20	Green		5/6	15/20	100	563			
503 - 930 - 20	Blue		5/6	15/20	1000	450			
503 - 502 - 21	Red		12	20	250	660			
503 - 521 - 21	Yellow		12	20	2500	590			
503 - 512 - 21	Green		12	20	100	563			
503 - 930 - 21	Blue		12	20	1000	450			
503 - 502 - 22	Red		24	20	250	660			
503 - 521 - 22	Yellow		24	20	2500	590			
503 - 512 - 22	Green		24	20	100	563			
503 - 930 - 22	Blue		24	20	1000	450			
503 - 502 - 75	Red	Smoked	110 VAC	6.0	75	660	180	-20 to +60	-30 to +85
503 - 521 - 75	Yellow		110 VAC	6.0	750	590			
503 - 512 - 75	Green		110 VAC	6.0	30	563			
503 - 930 - 75	Blue		110 VAC	6.0	300	450			
504 - 502 - 04	Red		2.1	20	250	660			
504 - 521 - 04	Yellow		2.2	20	2500	590			
504 - 512 - 04	Green		2.2	20	100	563			
504 - 930 - 04	Blue		3.6	20	1000	450			
504 - 502 - 20	Red		5/6	15/20	250	660			
504 - 521 - 20	Yellow		5/6	15/20	2500	590			
504 - 512 - 20	Green		5/6	15/20	100	563			
504 - 930 - 20	Blue		5/6	15/20	1000	450			
504 - 502 - 21	Red		12	20	250	660			
504 - 521 - 21	Yellow		12	20	2500	590			
504 - 512 - 21	Green		12	20	100	563			
504 - 930 - 21	Blue		12	20	1000	450			
504 - 502 - 22	Red	24	20	250	660				
504 - 521 - 22	Yellow	24	20	2500	590				
504 - 512 - 22	Green	24	20	100	563				
504 - 930 - 22	Blue	24	20	1000	450				
504 - 502 - 75	Red	110 VAC	6.0	75	660				
504 - 521 - 75	Yellow	110 VAC	6.0	750	590				
504 - 512 - 75	Green	110 VAC	6.0	30	563				
504 - 930 - 75	Blue	110 VAC	6.0	300	450				