


Headers

Latch/Ejector

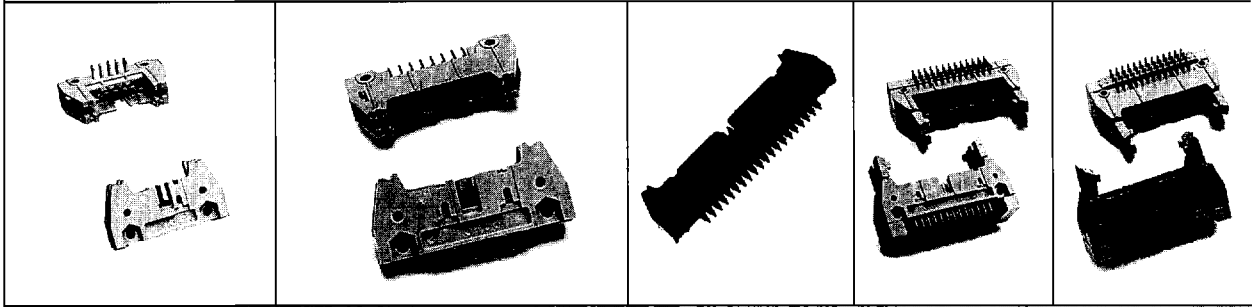

3000 Series

Contact Quantity (Condo)	30 Microinches Gold Plated		15 Microinches Gold Plated		Compliant Pin Straight, 4 Wall	Condo	
	3 Wall	4 Wall	3 Wall	4 Wall		3 Wall/3 Wall	4 Wall/4 Wall
	TS-0158*	TS-0160**	TS-0158*	TS-0160**	TS-0478	TS-0316	TS-0315
10 (20)	3793-XXXX	3793-XXXX	3793-XXXX UG	3793-XXXX UG	3793-6X0T02 TC	3793-DX0X	3793-LX0X
14 (28)	3314-XXXX	3314-XXXX	3314-XXXX UG	3314-XXXX UG	3314-6X0T02 TC	3314-DX0X	3314-LX0X
16 (32)	3408-XXXX	3408-XXXX	3408-XXXX UG	3408-XXXX UG	3408-6X0T02 TC	3408-DX0X	3408-LX0X
20 (40)	3428-XXXX	3428-XXXX	3428-XXXX UG	3428-XXXX UG	3428-6X0T02 TC	3428-DX0X	3428-LX0X
24 (48)	3627-XXXX	3627-XXXX	3627-XXXX UG	3627-XXXX UG	3627-6X0T02 TC	3627-DX0X	3627-LX0X
26 (52)	3429-XXXX	3429-XXXX	3429-XXXX UG	3429-XXXX UG	3429-6X0T02 TC	3429-DX0X	3429-LX0X
30 (60)		3440-XXXX	3440-XXXX UG	3440-XXXX UG	3440-6X0T02 TC	3440-DX0X	3440-LX0X
34 (68)	3431-XXXX	3431-XXXX	3431-XXXX UG	3431-XXXX UG	3431-6X0T02 TC	3431-DX0X	3431-LX0X
40 (80)	3432-XXXX	3432-XXXX	3432-XXXX UG	3432-XXXX UG	3432-6X0T02 TC	3432-DX0X	3432-LX0X
50 (100)	3433-XXXX	3433-XXXX	3433-XXXX UG	3433-XXXX UG	3433-6X0T02 TC	3433-DX0X	3433-LX0X
60 (120)	3372-XXXX	3372-XXXX	3372-XXXX UG	3372-XXXX UG	3372-6X0T02 TC	3372-DX0X	3372-LX0X
64 (128)	3764-XXXX	3764-XXXX	3764-XXXX UG	3764-XXXX UG	3764-6X0T02 TC	3764-DX0X	3764-LX0X

XXXX-XXXX

Product Series:
Shroud & Pin Configuration:
 1=3 Wall, Right Angle Solder Tail
 2=3 Wall, Straight Solder Tail
 3=3 Wall, Right Angle Wrap Post
 4=3 Wall, Straight Wrap Post
 5=4 Wall, Right Angle
 6=4 Wall, Straight
Latch/Ejector System:
 0=No Latch/Ejector
 2=Short, Roll-Pin Latch/Ejectors (3505-2)
 3=Long, Roll-Pin Latch/Ejectors (3505-3)
 4=Roll-Pin Ejectors (3505-4)
 5=Short, Snap-in Latch/Ejectors (3505-30)
 6=Long, Snap-in Latch/Ejectors (3505-31)

Tail:
 02=Solder Tail for .062 (1,57) thick board
 K2=Kinked Solder Tail for .062 (1,57) thick board
 03=Solder Tail for .094 to .125 (2,39 to 3,18) thick board
 05=Wrap Posts for up to 3 levels of Wire Wrap

XXXX-XXXX UG

Product Series:
Shroud & Pin Configuration:
 1=3 Wall, Right Angle Solder Tail
 2=3 Wall, Straight Solder Tail
 5=4 Wall, Right Angle Solder Tail
 6=4 Wall, Straight Solder Tail
Latch/Ejector System:
 0=No Latch/Ejector
 5=Short, Snap-in Latch/Ejectors (3505-30)
 6=Long, Snap-in Latch/Ejectors (3505-31)

Tail:
 02=Solder Tail for .062 (1,57) thick board
 K2=Kinked Solder Tail for .062 (1,57) thick board
 03=Solder Tail for .094 to .125 (2,39 to 3,18) thick board

XXXX-6X0T02 TC

Product Series:
Latch/Ejector System:
 0=No Latch/Ejector
 5=Short, Snap-in Latch/Ejectors (3505-30)
 6=Long, Snap-in Latch/Ejectors (3505-31)

XXXX-XX0X

Product Series:
Wall:
 D=3 Wall
 L=4 Wall
Latch/Ejector System:
 0=No Latch/Ejector
 2=Short, Roll-Pin Latch/Ejectors (3505-2)
 3=Long, Roll-Pin Latch/Ejectors (3505-3)
 5=Short, Snap-in Latch/Ejectors (3505-30)
 6=Long, Snap-in Latch/Ejectors (3505-31)

Tail:
 02=Solder Tail for .062 (1,57) thick board
 03=Solder Tail for .094 to .125 (2,39 to 3,18) thick board (Standard Product)

* Refer to TS-0489 for the High Temperature (processing temperature) version of this 3 Wall Latch/Eject Header NXXXX-XXXX CG.

** Refer to TS-0492 for the High Temperature (processing temperature) version of this 4 Wall Latch/Ejector Header NXXXX-XXXX CG.