7 mm SQUARE THIN TYPE ISOLATOR

MODEL SI-7SS [ ] 1.441 G - T
(1) (2) (3) (4) (5)

(1) Series SI-7SS : 2.0 mm Height
(2) Rotating Direction (R or L)
(3) Center Frequency
(4) G : GHz
(5) T : Taping
Blank:Bulk

Specification

Frequency (GHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. Max.	2f0 Min. (dB)	3f0 Min. (dB)	Handling Power Max. (W)	Reflection Power Max. (W)
1.429~1.453	[0.4] 0.6	15	1.5	15	15	5.0	1.0

Operating Temperature(℃) : −35 to +85
Impedance : 50 Ω Typ.

[ ] ·····Typical at R.T.
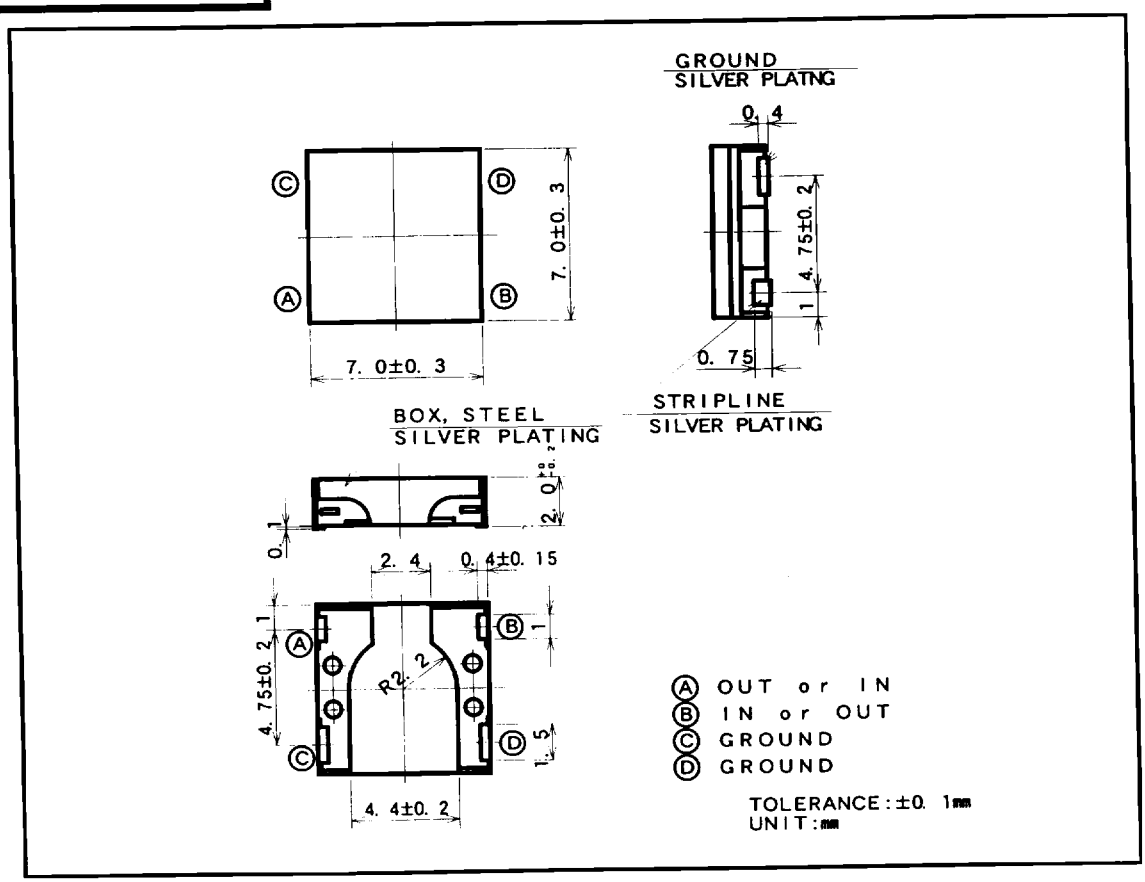
Shape & Size