
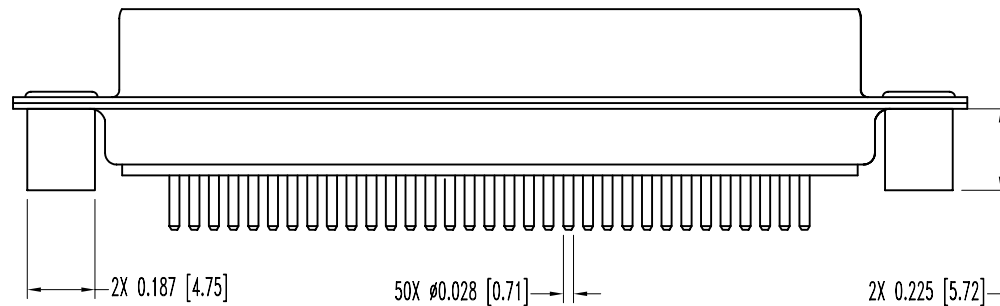
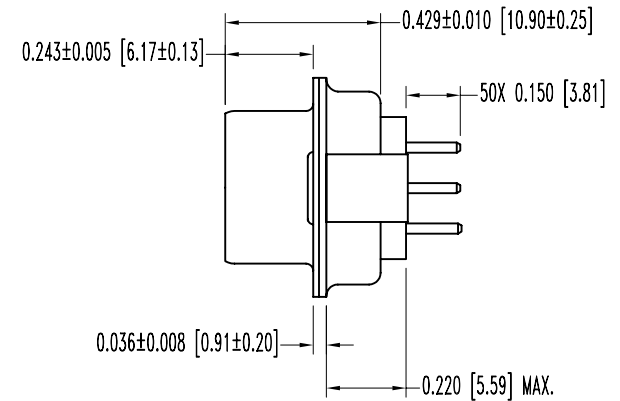


SK3675


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

| DATE | REV | REVISION RECORD | APP | DR | CK |
|--------|-----|-----------------|-----|----|----|
| 4-4-01 | NC | ECO 17550 | | YK | |
| | | | | | |
| | | | | | |

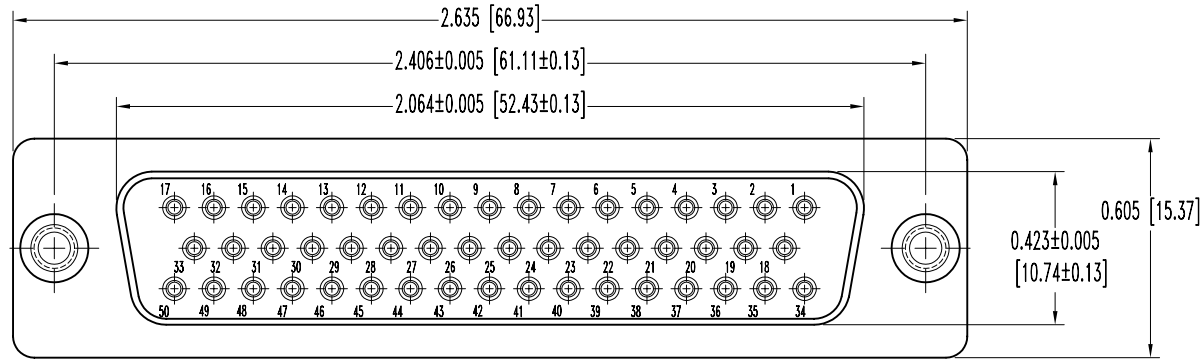


NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: NYLON RESIN, UL 94V-0, BLACK COLOR.
 CONTACTS: PRECISION MACHINED HIGH TENSILE PHOSPHOR BRONZE.
 SHELLS: STEEL WITH ZINC PLATE AND DICHROMATE SEAL.
 SPACERS: STEEL, ZINC PLATE WITH DICHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 7.5 AMPS NOMINAL.
 INITIAL CONTACT RESISTANCE: 0.008 OHMS MAX.
 INSULATOR RESISTANCE: 5 G OHMS.
 WORKING VOLTAGE: 300 V. r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

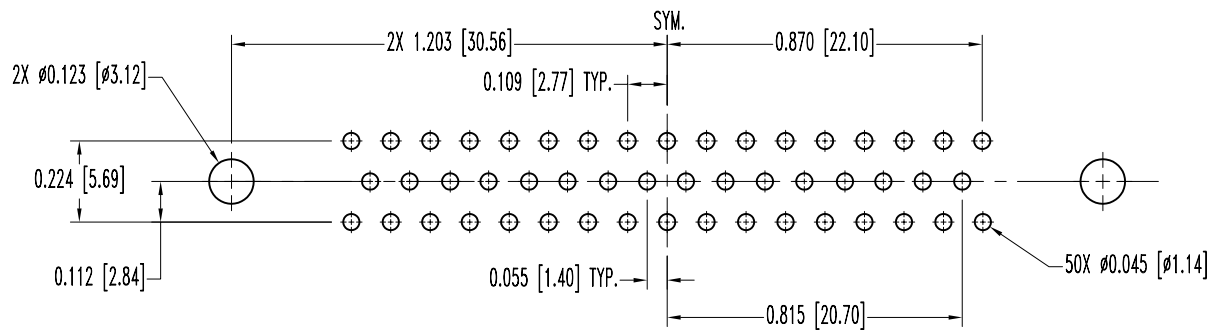

CONTACT HOLE PATTERN

| | | | | | |
|--|--|------------------------|--|----------------------------------|--|
|  POSITRONIC INDUSTRIES INC. www.connectpositronic.com | | SCALE N.T.S. | | DRAWN BY Y. KELLEYBREW | |
| DECIMAL TOL. ± 0.015 [0.38] | | MD SERIES | | APPROVED BY | |
| WF # 3549 | | MD50F3S000 | | | |
| ANGULAR TOL. ± 5° | | DATE 4-4-01 | | DRAWING NUMBER SK3675 | |
| | | | | REV. NC | |