


## 410 Series: | Ø 6.35 mm Mounting (2 Pin Bi-Colour LED)

- Save on panel space with dual colour indication
- Reverse polarity device
- Flying lead terminations available
- MLQ 20
- MTBF 90,000 hrs

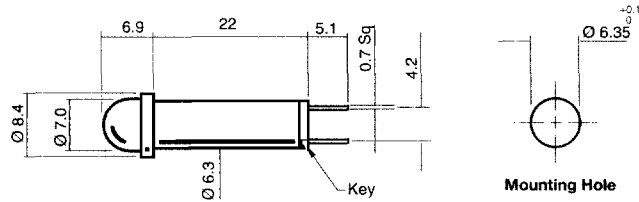


Scale 1 : 1  
Dimensions in mm (Typical)

### Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
410 - 530 - 04	Red/Green Bi-Colour	Water Clear	2.0 2.2	20	12	635 565	180	0	0
410 - 530 - 20	Red/Green Bi-Colour		5/6	15/20	9/12	635 565		to	to
410 - 530 - 21	Red/Green Bi-Colour		12	20	12	635 565		+85	+85
410 - 530 - 22	Red/Green Bi-Colour		24	20	12	635 565			
			V	mA	mcd	nm	deg	°C	°C

## 410 Series: | Ø 6.35 mm Mounting (3 Pin Bi-Colour LED)

- Can be used as a red/yellow/green tri-colour (Contact Technical Sales)
- Cost effective panel indication
- Front panel replaceability for ease of installation and maintenance
- MLQ 20
- MTBF 90,000 hrs

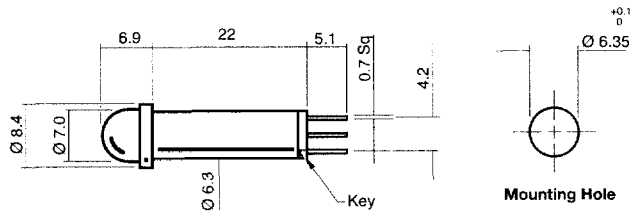

Scale 1 : 1  
Dimensions in mm (Typical)

### Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
410 - 535 - 04	Red/Green Bi-Colour	Water Clear	2.0 2.2	20	40	635 565	180	0	0
410 - 535 - 20	Red/Green Bi-Colour		5/6	15/20	30/40	635 565		to	to
410 - 535 - 21	Red/Green Bi-Colour		12	20	40	635 565		+85	+85
410 - 535 - 22	Red/Green Bi-Colour		24	20	40	635 565			
			V	mA	mcd	nm	deg	°C	°C