




### Features

- ◇ For surface mounted application
- ◇ Easy pick and place
- ◇ Metal to silicon rectifier, majority carrier conduction
- ◇ Low power loss, high efficiency
- ◇ High current capability, low VF
- ◇ High surge current capability
- ◇ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ◇ Epitaxial construction
- ◇ High temperature soldering:  
260°C / 10 seconds at terminals

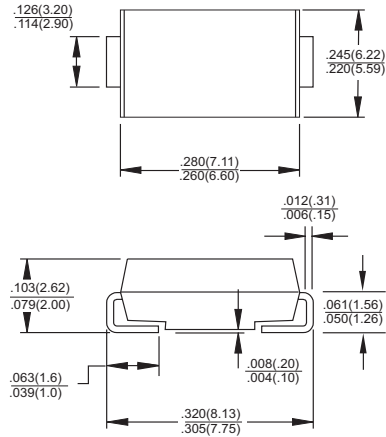

### Mechanical Data

- ◇ Case: JEDEC DO-214AB Molded plastic
- ◇ Terminals: Pure tin plated, lead free
- ◇ Polarity: Indicated by cathode band
- ◇ Packaging: 16mm tape per EIA STD RS-481
- ◇ Weight: 0.21 gram

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.


For capacitive load, derate current by 20%

Type Number	Symbol	SS 32	SS 33	SS 34	SS 35	SS 36	SS 39	SS 310	SS 315	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	90	100	150	V
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	63	70	105	V
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	90	100	150	V
Maximum Average Forward Rectified Current at $T_L$ (See Fig. 1)	$I_{(AV)}$	3.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	100				70				A
Maximum Instantaneous Forward Voltage (Note 1) IF= 3.0A @ 25°C @ 100°C	$V_F$	0.5 0.4		0.75 0.65		0.85 0.70		0.95 0.80		V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	$I_R$	0.5 10				5		0.1 0.5		mA mA
Typical Thermal Resistance ( Note 2 )	$R_{\theta JL}$ $R_{\theta JA}$	17 55								°C/W
Operating Temperature Range	$T_J$	-55 to +125				-55 to +150				°C
Storage Temperature Range	$T_{STG}$	-55 to +150								°C


Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle

## RATINGS AND CHARACTERISTIC CURVES (SS32 THRU SS315)


**FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE**

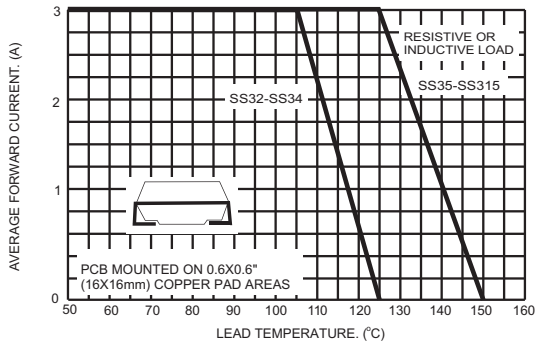


**FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

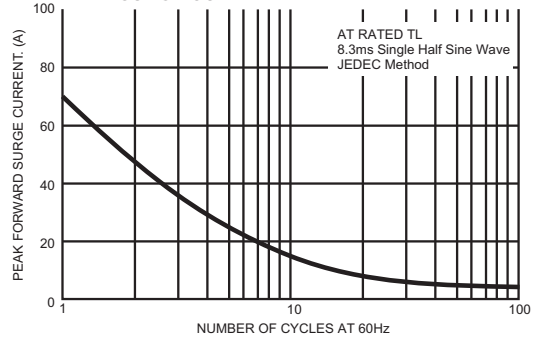


**FIG.3- TYPICAL FORWARD CHARACTERISTICS**

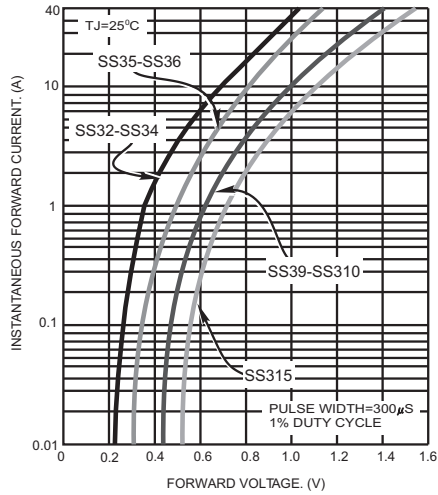

**FIG.4- TYPICAL REVERSE CHARACTERISTICS**

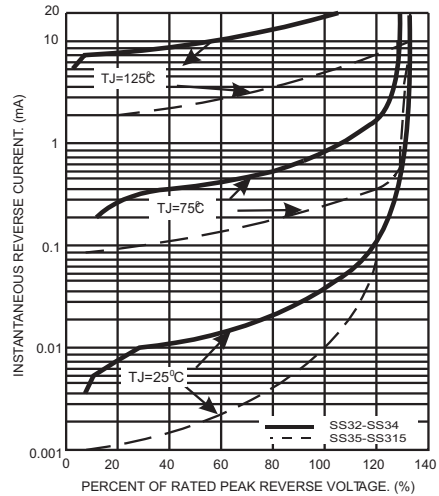

**FIG.5- TYPICAL JUNCTION CAPACITANCE**

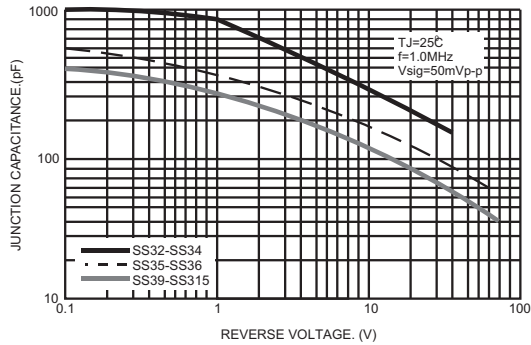

**FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS**

