

Preliminary

Helping Customers Innovate, Improve & Grow



Application


- Wireline - 100G Optical Transmission and Routers

VS-401

Features

- Frequency range 1.3 to 2GHz
- Ultra low jitter performance (8fsec-rms 12 kHz to 20MHz)
- 5.0V supply voltage
- Output Sinewave >+5dBm
- Operating Temperature range -20°to +85°C
- 13 x 20 mm SMD package

Typical Phase Noise @ 1.75GHz

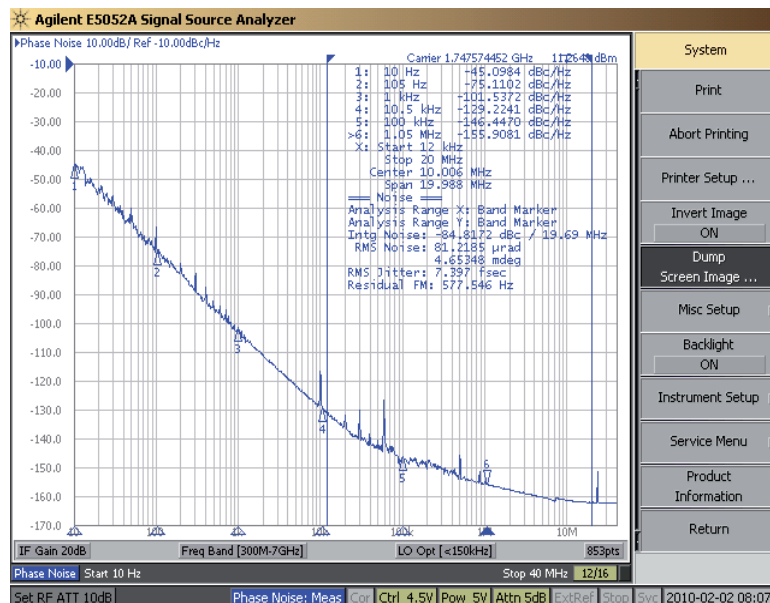

For Additional Information, please contact our Product Management in

USA:

Vectron International
267 Lowell Road
Hudson, NH 03051
Ben Witham
BWitham@vectron.com
1 (603) 577 6831

Europe, Germany:

Vectron International
Landstrasse
D-74924, Neckarbischofsheim
Oliver Terasa
OTerasa@vectron.com
+49 7268 801 303

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.