

HIGH POWER AIRCRAFT/ VEHICLE DC BUS VOLTAGE SUPPRESSOR
APPLICATIONS



- ✓ DC Power Supply Protection
- ✓ MIL-STD-704 Power Bus Protection

IEC COMPATIBILITY (EN61000-4)

- ✓ *Meets the Following Military Specifications:*
 - MIL-STD-704
 - MIL-PRF-19500
- ✓ 15 kilowatts Peak Pulse Power per Line (tp=10/1000µs)
- ✓ Each Device 100% Tested
- ✓ 28 Volt Power Supply Protection

MECHANICAL CHARACTERISTICS

- ✓ Molded Plastic Case
- ✓ Weight 38 grams: 704-15K36 & 65 grams: 704-15K36T (Approximate)
- ✓ Flammability Rating UL 94V-0
- ✓ Device Marking: Logo, Date Code & Part Number
- ✓ Positive Terminal Indicated By Polarity Dot
- ✓ Screening for Military Requirements IAW MIL-PRF-19500 is Available
- ✓ Screening Available Upon Request - The 704 series can be screened upon request for military requirements in accordance with MIL-PRF-19500 (applicable test). Standard screening is available based on the following options:
 - H1 - Submodule Screening per test plans 05231 & 05232
 - H2 - Submodule & Module Screening per test plan 05233
 - H3 - Submodule & Module Screening, Module Group B & C Lot Testing per test plans 05234 & 05235

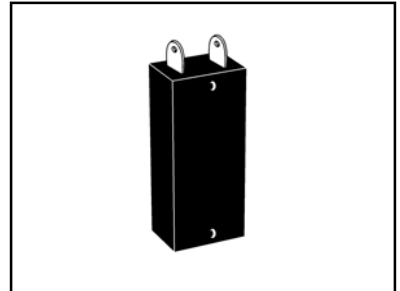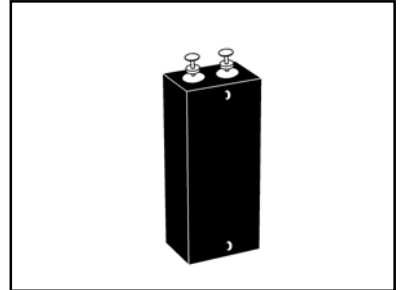
704-15K36

704-15K36T
MAXIMUM RATINGS @ 25°C Unless Otherwise Specified


PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp = 10/1000µs) - See Fig. 1	P_{PP}	15	kilowatts
Operating Temperature	T_L	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Steady State Power Dissipation @ 50°C	T_A	10.0	Watts
Forward Surge Rating @ 25°C 1/120 seconds	F_I	300	Amps

704-15K36 thru 704-15K36T


DEVICE CHARACTERISTICS

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified						
PART NUMBER	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM LEAKAGE CURRENT	MAXIMUM PEAK PULSE CURRENT (See Fig. 2)	MAXIMUM FORWARD VOLTAGE
	V_{WM} VOLTS	@10mA $V_{(BR)}$ VOLTS	@ I_{PPM} V_C VOLTS	@ V_{WM} I_b μA	I_{PPM} AMPS	@100A, 8.3ms V_F VOLTS DC
704-15K36	31.5	36	53	100	300	3.0
704-15K36T	31.5	36	53	500	300	15.0


**FIGURE 1
PEAK PULSE POWER VS PULSE TIME**

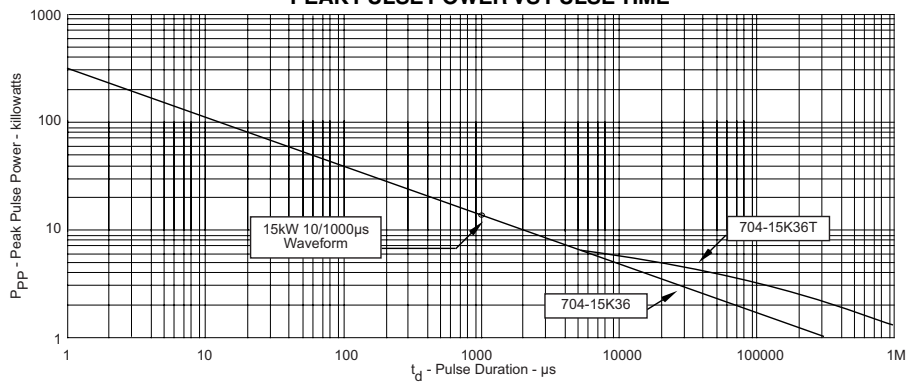

**FIGURE 2
PULSE WAVE FORM**

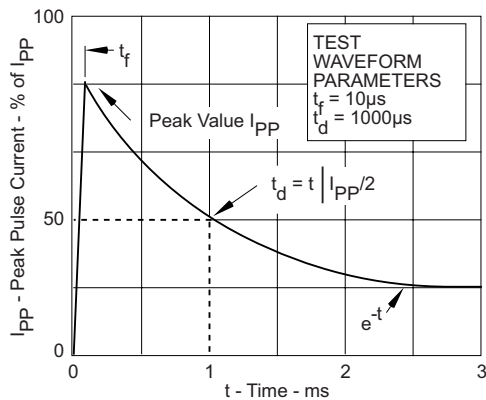

**FIGURE 3
POWER DERATING CURVE**

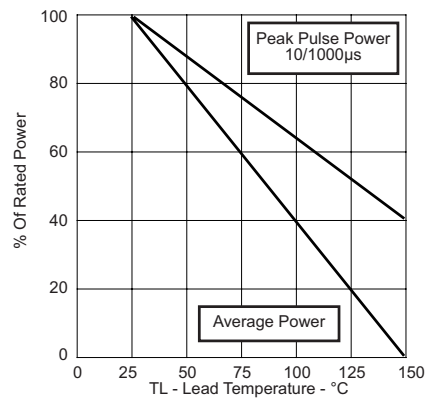

704-15K36 thru 704-15K36T

PACKAGE OUTLINE & DIMENSIONS

704-15K36 PACKAGE OUTLINE

704-15K36

DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	49.28	51.56	1.97	2.03
B	43.92	44.96	1.73	1.77
C	2.79	3.56	0.110	0.140
D	18.29	19.81	0.72	0.78
E*	3.18 DIA	3.18 DIA	0.125 DIA	0.125 DIA
F	8.76	10.29	0.345	0.405
G	13.51	15.04	0.532	0.592
H*	0.66	0.71	0.026	0.028
I	11.94	13.46	0.47	0.53
J	2.41	2.92	0.095	0.115
K	7.70	8.20	0.303	0.323
L	9.40	10.92	0.37	0.43

704-15K36T PACKAGE OUTLINE

704-15K36T

DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	62.74	64.26	2.47	2.53
B	53.34	54.48	2.10	2.145
C	4.32	5.33	0.17	0.21
D	10.54	12.07	0.415	0.475
E*	3.18 DIA	3.18 DIA	0.125 DIA	0.125 DIA
F	8.26	9.27	0.325	0.365
G*	11.43	11.43	0.450	0.450
H	21.84	23.37	0.86	0.92
I*	5.59	5.59	0.220	0.220
J	16.51	17.53	0.65	0.69
K*	8.51	8.51	0.335	0.335

Note*: Dimensions are nominal

Outline & Dimensions: Rev 1 - 4/04, 06035

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: sales@protekdevices.com

Web Site: www.protekdevices.com