

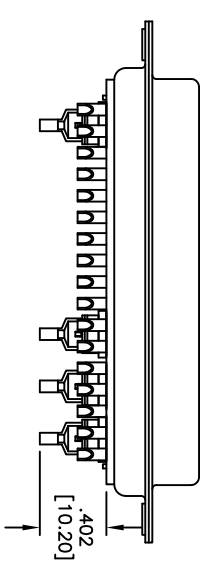



Rev	AWO #	Description	Date	Appr
-		RELEASED	9/15/10	

APPROVED: _____
 DATE: _____ TITLE: _____

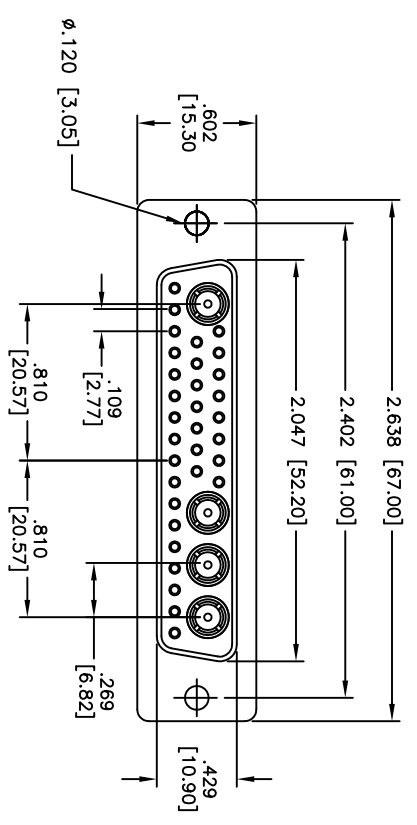

SPECIFICATIONS:
 Material: Insulator: PBT, 30% glass reinforced, rated UL 94V-0
 Insulator color: Black
 Coaxial center Insulator: Teflon
 Coaxial center Insulator color: White
 Contacts: Brass
 Shell: Steel, Tin plated
 Hardware: Brass, Nickel plated
 Plating: Gold flash over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 10 – 40 Amps max (See Chart)
 Contact resistance: 10 mohms max
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +280°C
 Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
.X	± .10	ØX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	AY	9/15/10			
CHECKED	VW	9/15/10			
APPROVED					
TITLE		PART NO.		SIZE	
D-SUB POWER SOCKET, D36W4, STRAIGHT, FEMALE, SOLDER CUP		D36W4-SD-1-1		X	
REF: S0009T		SCALE: NTS		SHEET 1 OF 1	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

6 5 4 3 2 1

A B C D