

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/08	

APPROVED: _____ TITLE: _____

DATE: _____

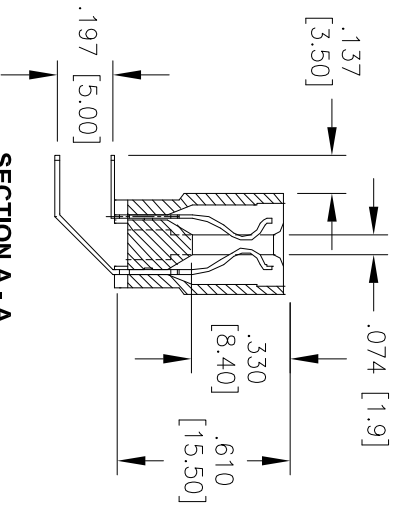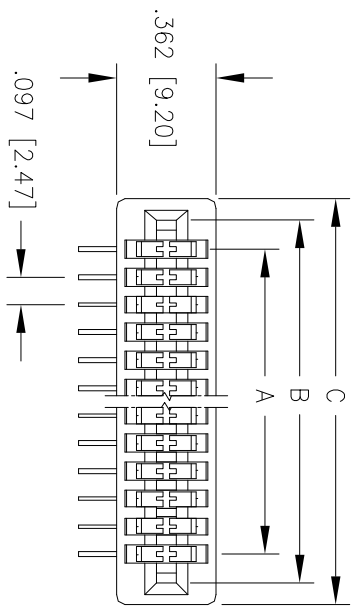

SECTION A - A

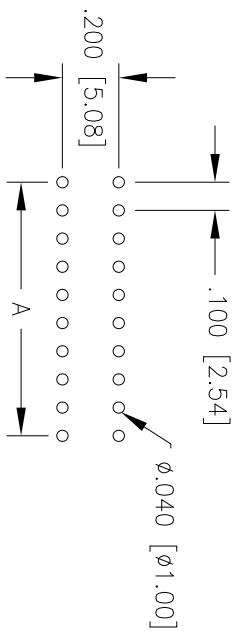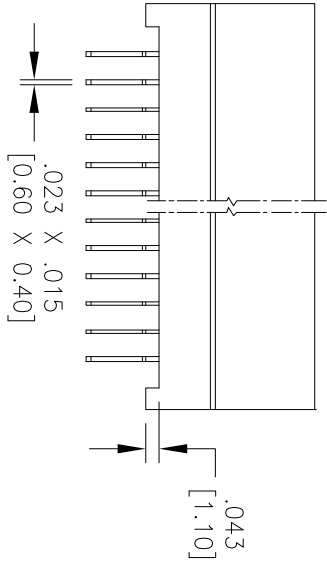

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
 Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
Plating:
 Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +105°C
Environmental:
 Lead free, RoHS Compliant,
 Recommended Soldering temp: 260°C for 5 sec.

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 28, 30, 32, 34, 36, 38, 40, 42, 44, 48, 50, 60, 62, 64, 70, 72, 82, 86, 98, 100, 108
 A = .100 [2.54] x No. of Spaces
 B = A + .200 [5.08]
 C = A + .360 [9.14]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES

X	± .10	ØX	± .10
XX	± .020	ØXX	± .015
XXX	± .015	ØXXX	± .010

APPROVALS

DATE	DATE
------	------

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CARD EDGE CONNECTOR, RIGHT ANGLE
 .100" PITCH, PCB

DRAWN	SS	9/10/08	SIZE	PART NO.	REV.
CHECKED			X	CERA-XX-UHT	-
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1