


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/08/10	

APPROVED: _____
 DATE: _____ TITLE: _____

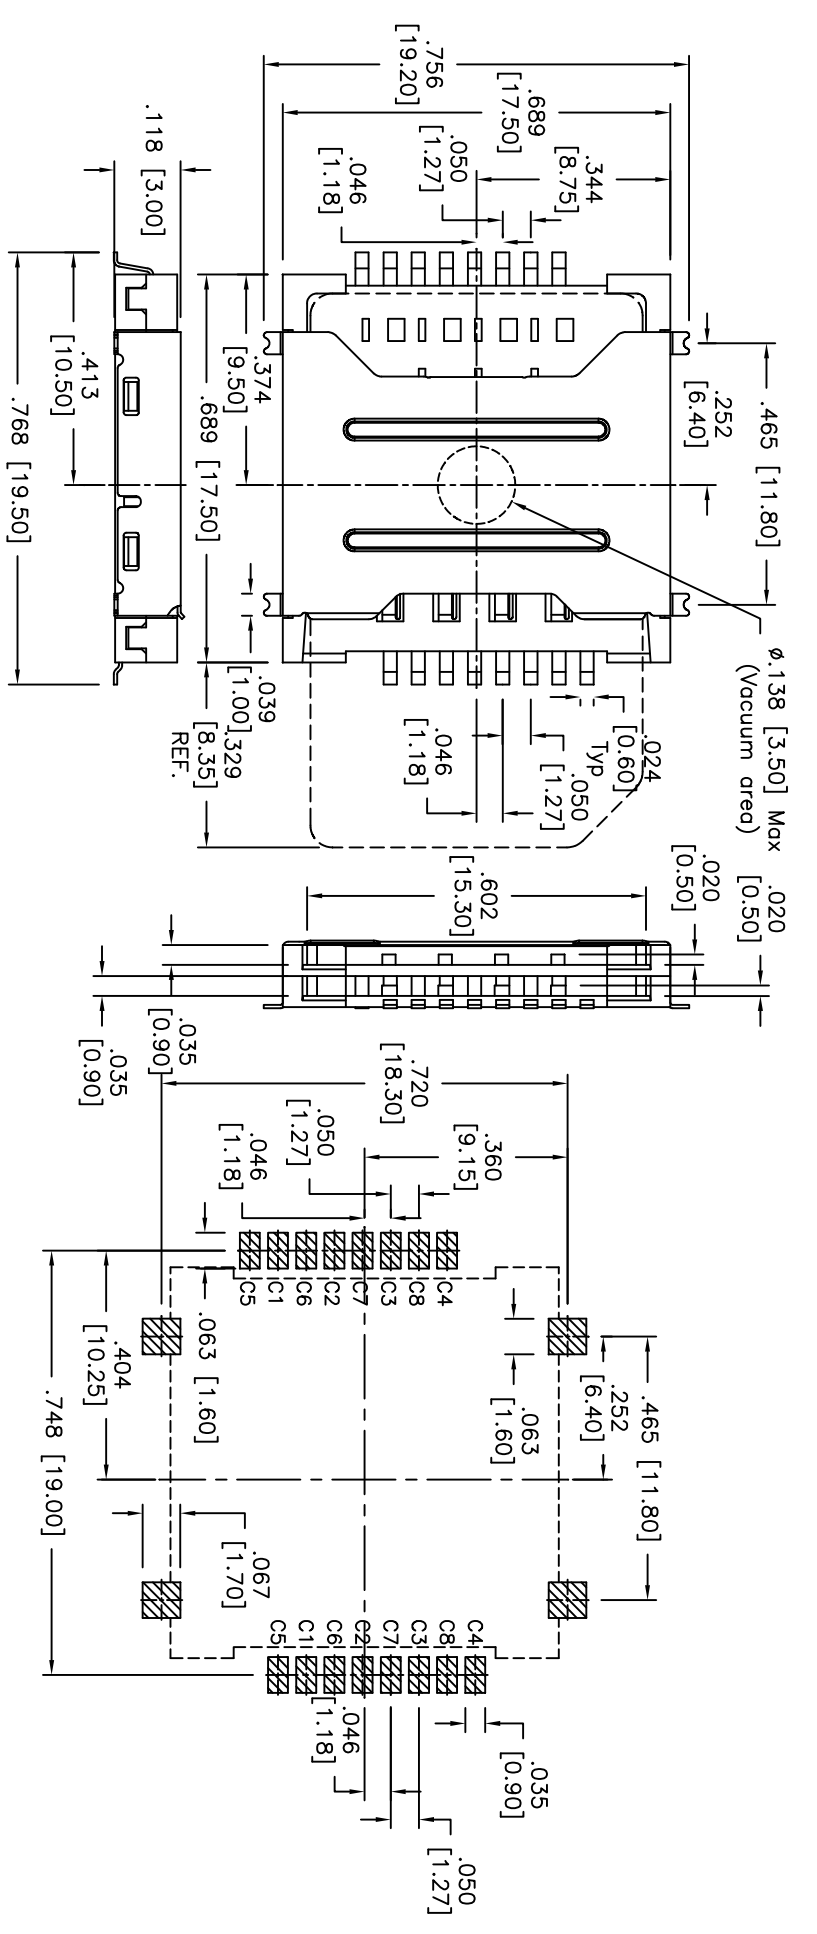

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating:
 Gold flash over Nickel underplate on contact area,
 Tin over Copper underplate on SMT tails.

Electrical:
 Contact resistance: 100 mohms max.
 Insulation resistance: 1000 Mohms min

Temperature Rating:
 Operating temperature: -40°C to +85°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SIM CARD CONNECTOR, 8 POSITION SURFACE MOUNT

SIZE	PART NO.	SCALE	SHEET	REV.
X	SCC-J-08-SMT	NIS	1 OF 1	-