


PRODUCT FEATURES

1. Surface mount balun matched filter with a small size of 2.0 X 1.2 X 1.0 mm, RoHS compliant.
2. Provide high rejection rate and DC bias option.
3. Highly stable under temperature and humidity changes.

RF CHARACTERISTICS


P/N BM2450E0805LT	Specification
Frequency range	2400 - 2500 MHz
Insertion Loss	3.5 dB max
VSWR	2.0 max
Impedance (Unbalanced)	50 Ω
Impedance (Balanced)	Conjugate to BC series of Bluetooth chipset
Phase Difference	180°± 10°
Amplitude Difference	2.0 dB Max
Attenuation (min.)	35dB @ 880-960 MHz 30dB @ 1710-1880 MHz 20dB @ 1880-1990 MHz 40dB @ 4800-5000 MHz
Operating temperature range	-40°C to +85°C

PHYSICAL DIMENSIONS

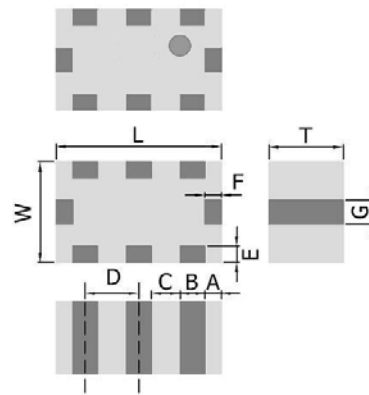


Symbol	Dimension (mm)
L	2.00 ± 0.15
W	1.25 ± 0.15
T	1.0 ± 0.10
A,E,F	0.20 ± 0.15
B	0.30 ± 0.15
C	0.35 ± 0.15
D	0.65 ± 0.15
G	0.30 ± 0.15

TERMINAL CONFIGURATION



PIN	Definition	PIN	Definition
P1	Unbalanced Port	P5	Balanced Port
P2	DC/GND	P6	GND
P3	NC	P7	Balanced Port
P4	GND	P8	GND

PCB DESIGN/LAYOUT CONSIDERATION

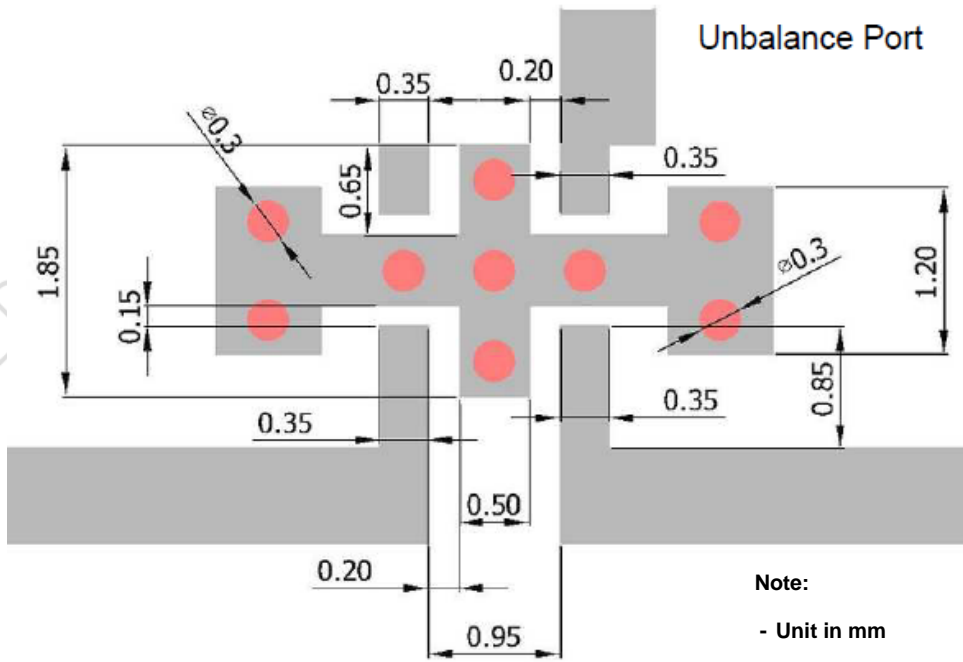

- Note:**
- Unit in mm
 - Design trace width to be 50Ω impedance.

Typical RF Performance

