

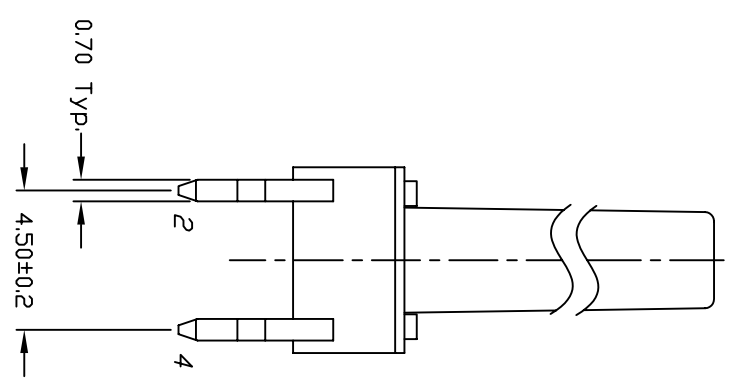


RECOMMEND P.C.B. LAYOUT

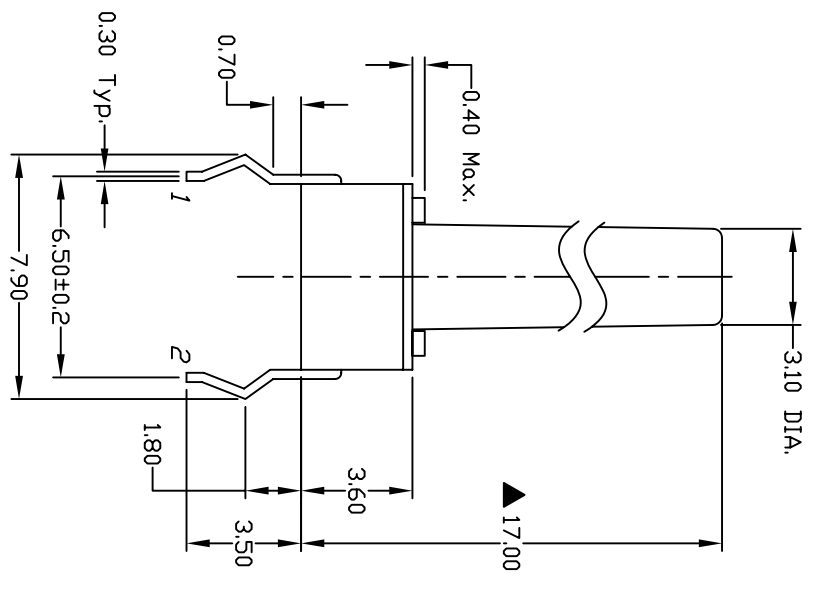

CIRCUIT: SPST  
CONTACT CONFIGURATION

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 50mA, @12V DC
  5. TRAVEL: 0.25±0.1mm
  6. OPERATING FORCE: 250±50gf
  7. CONTACT RESISTANCE: 100m ohms Max.
  8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
  9. INSULATION RESISTANCE: 100M ohms min.
  10. DIELECTRIC STRENGTH: 250V RMS MIN.
  11. OPERATING TEMP.: -20°C to -70°C
  12. DESIGNATE MAJOR DIMENSIONS.
  13. 2002/95/EC (ROHS) COMPLIANT

|   |       |                      |        |    |
|---|-------|----------------------|--------|----|
| B | 17262 | FIXED DRAWING, NOTES | 5/8/07 | TN |
|---|-------|----------------------|--------|----|

|   |       |                         |  |  |
|---|-------|-------------------------|--|--|
| A | 10034 | RELEASED FOR PRODUCTION |  |  |
|---|-------|-------------------------|--|--|

| REV. | ECN No. | DESCRIPTION  | DATE | CHKD |
|------|---------|--|------|------|
|      |         | THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |      |      |

TITLE

TL1105LF250Q



|       |        |    |         |     |
|-------|--------|----|---------|-----|
| SCALE | DATE   | DR | DWG     | REV |
| 4:1   | 5/8/07 | TN | P010025 | B   |