

Pb Free Plating Product


GPA1601R thru GPA1607R



16.0 Ampere Reverse Polarity General Purpose Rectifier Diodes

- Features**
- * Glass passivated chip junction
 - * Low forward voltage drop
 - * High current capability
 - * Low reverse leakage current
 - * High surge current capability
- Application**
- * BY-PASS DIODE application
 - * Solar power supply and PV system
 - * PV diode for Solar Junction Box

- Mechanical Data**
- * Case: Heatsink TO-220AC
 - * Epoxy: UL 94V-0 rate flame retardant
 - * Terminals: Solderable per MIL-STD-202 method 208
 - * Polarity: As marked on diode body
 - * Mounting position: Any
 - * Weight: 2.1 gram approxiamtely

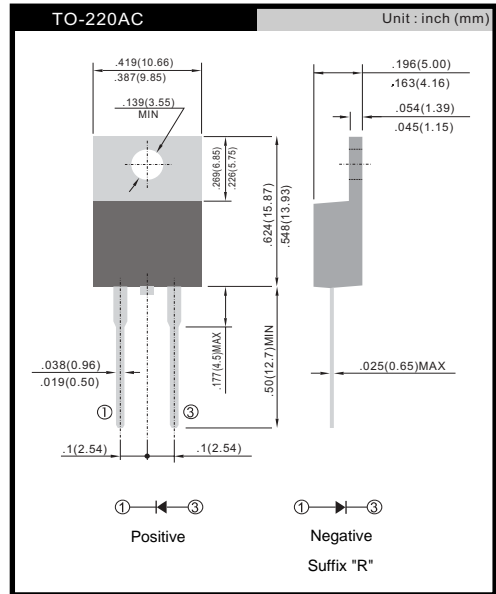

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	GPA 1601R	GPA 1602R	GPA 1603R	GPA 1604R	GPA 1605R	GPA 1606R	GPA 1607R	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified @Tc = 100°C	I(AV)	16.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	IFSM	250							A
Maximum Instantaneous Forward Voltage @ 16.0A	VF	1.1							V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=125°C	IR	10 250							uA
Typical Junction Capacitance (Note 1)	Cj	100							pF
Typical Thermal Resistance (Note 2)	RθJC	2.0							°C/W
Operating Temperature Range	TJ	-65 to +150							°C
Storage Temperature Range	TSTG	-65 to +150							°C

Note 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

2. Mount on P.C. Board with 2"x3" x0.25" Al-plate

RATINGS AND CHARACTERISTICS CURVES(GPA1601R thru GPA1607R)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

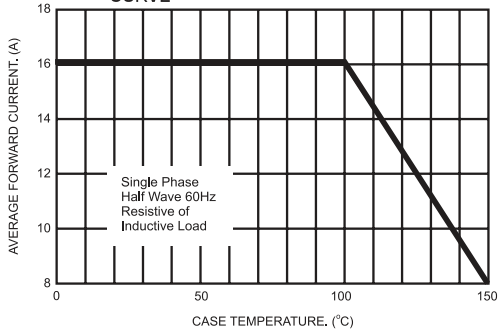


FIG.2- TYPICAL REVERSE CHARACTERISTICS

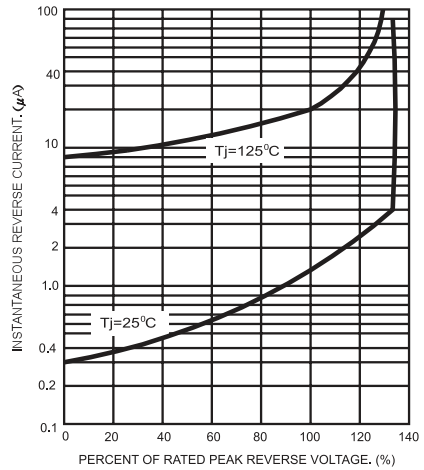


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

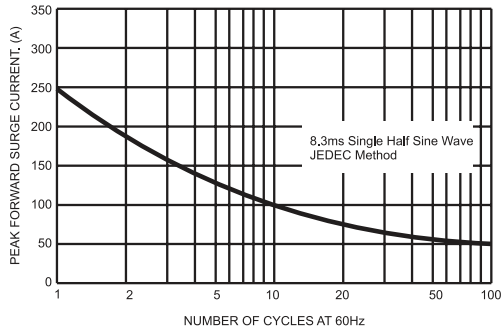


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

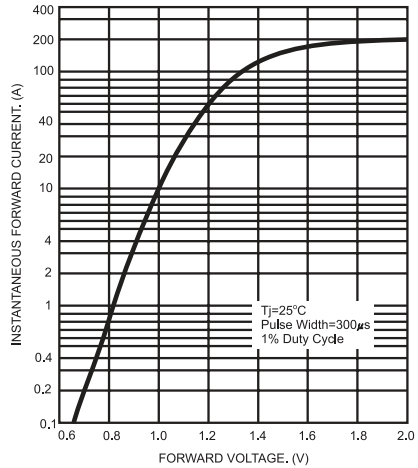


FIG.4- TYPICAL JUNCTION CAPACITANCE

