


SD

2065-19-7

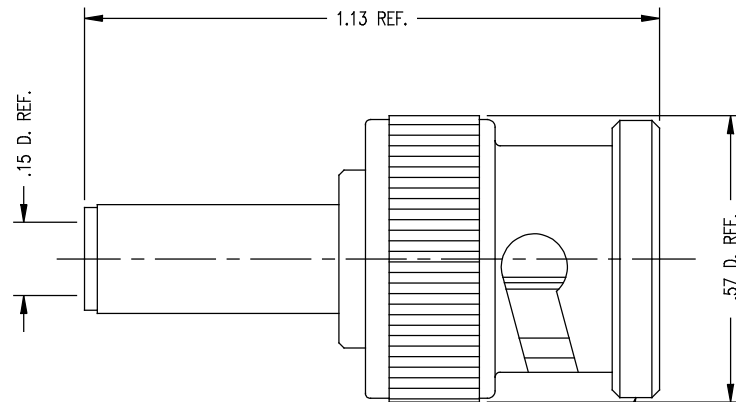

STAMP: KINGS 2065-19-7  
YRWK (DATE CODE)

## NOTES:

1. FOR USE WITH TYPE 735 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-690 (BULK PACKAGING) OR 3-688 (BAG PACKAGING).
3. FOR CRIMPING USE DIE SIZE KTH-2185.
4. CENTER CONTACT AND SLEEVE TO BE SUPPLIED UNASSEMBLED.
5. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
6. MARK PACKAGE: KINGS 2065-19-7  
YRWK (DATE CODE)
7. MATERIAL:  
INSULATOR- TEFLON  
GASKET- SILICONE RUBBER  
K-GRIP SLEEVE: COM'L BRONZE  
OUTER CONTACT } BERYLLIUM COPPER  
SPRING WASHER }  
ALL OTHER METAL PARTS- BRASS
8. FINISHES:  
CENTER CONTACT- GOLD PLATED  
SPRING WASHER- SILVER PLATED  
ALL OTHER METAL PARTS- NICKEL PLATE
9. ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE- 75 OHMS  
FREQUENCY RANGE- DC TO 2 GHz  
WORKING VOLTAGE- 500 VRMS

## REVISIONS

ISSUE	CHANGES
0	ER 38147 TML 12/12/00

2065197S

SCALE 4:1

APPROX SURFACE AREA

WAS: E-19877

USED ON

REF: EQR 221

75 OHM BNC PLUG

DRAWN TML DATE 12/08/00

DESIGN TML DATE 12/08/00

APPR. DATE

**KINGS**  
ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

2065-19-7

SD