



LED22FC-TEC



TECHNICAL DATA

Mid-Infrared Light Emitting Diode, Flip-Chip Design

Light Emitting Diodes with central wavelength 2.23 μm series are based on heterostructures grown on GaSb substrates by LPE. Solid solutions AlGaAsSb are used in the active layer. Wide band gap solid solutions AlGaAsSb with Al content 64% are used for good electron confinement. LED22FC-TEC has a stable output power and a lifetime more than 80000 hours.


Features

- Structure: GaInAsSb/AlGaAsSb, Flip-Chip Design
- Peak Wavelength: typ. 2.23 μm
- Optical Output Power: typ. 1.1 mW qCW
- Package: TO-5, with TEC, thermistor and window




Specifications

Item	Condition	Rating			Unit
		Min.	Typ.	Max.	
Peak Wavelength	T=300 K	2.20	2.23	2.29	μm
FWHM	150 mA CW	100	250	300	nm
Quasi-CW Optical Power	200 mA qCW	0.8	1.1	2	mW
Pulsed Optical Power	1 A	20	25	40	mW
Switching Time	T=300 K	10	20	30	ns
Operation Voltage	200 mA qCW				V
Operating Temperature		-240 ... +50			$^{\circ}\text{C}$
Emitting Area		670x770			μm
Soldering Temperature		180			$^{\circ}\text{C}$
Package	TO-5, with built-in thermocooler, thermoresistor, with cap and quartz window				

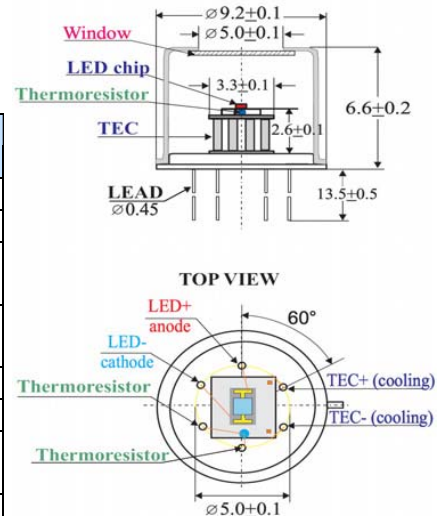

(Unit: mm)

Operating Regime

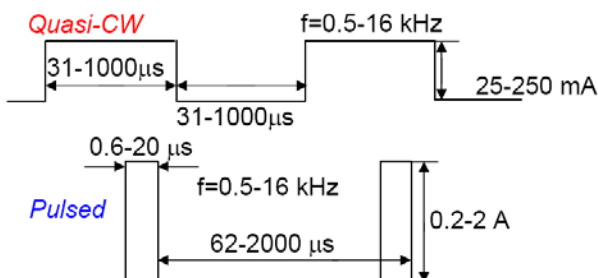

Quasi-CW

- Maximum current 220 mA
- Recommended current 150-200mA

Pulsed

- Maximum current 1 A (puls length 500 ns, repetition rate 2kHz)



Typical Performance Curves

