

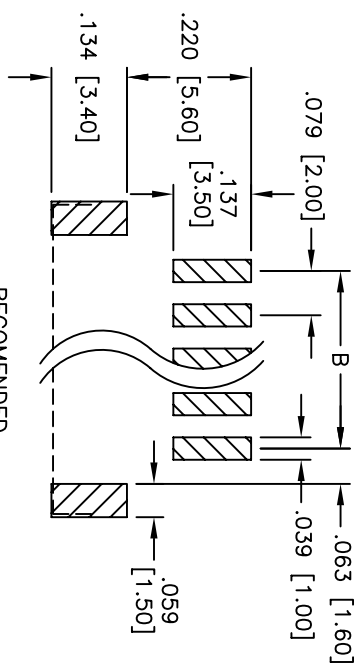
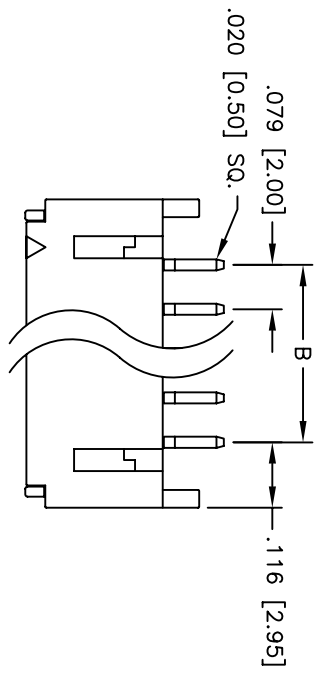


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	

APPROVED: _____
 DATE: _____ TITLE: _____

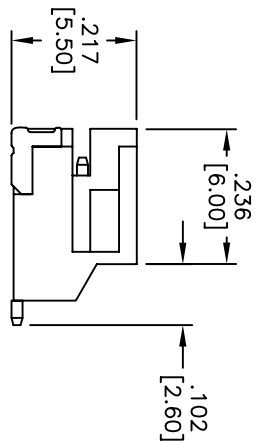

RECOMMENDED
PCB LAYOUT

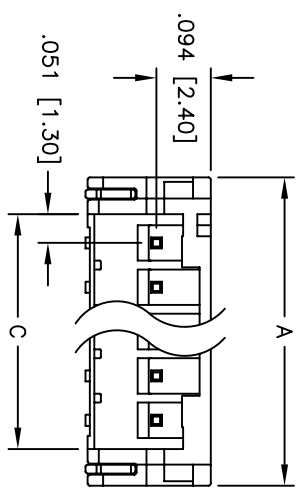

SPECIFICATIONS:
 Material: Nylon 6T, rated UL 94V-0
 Insulator color: White
 Contacts: Brass
 Plating: Tin over Copper underplate overall

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 2 Amps max
 Contact resistance: 10 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



Positions: 2 thru 15
 A = .079 [2.00] x No. of Positions + .153 [3.90]
 B = .079 [2.00] x No. of Spaces
 C = .079 [2.00] x No. of Positions + .024 [0.60]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE

DRAWN	SS	4/7/05
CHECKED		
APPROVED		

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	SIZE	PART NO.	REV.
.079 [2.00] SHRROUDED HEADER RIGHT ANGLE, SURFACE MOUNT	X	2SH-C-XX-TR-SMT	-
REF:	SCALE:	NTS	SHEET 1 OF 1