

Description	Material	Finish
Body (-SMD)	Brass	Gold
Body (-SMD-N)	Brass	Nickel
Pin/Socket	BE CU	Gold
Insulation	Teflon	Teflon

	REVISIONS					
R	REV	DESCRIPTION	DATE	APPV		
	В	Recommended Footprint revised; Gold & Nickel finish options	9/25/09	CJ		


SIDE VIEW

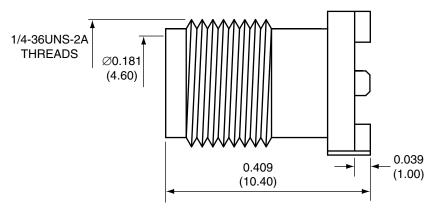

BACK VIEW

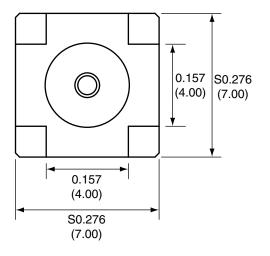

RECOMMENDED FOOTPRINT

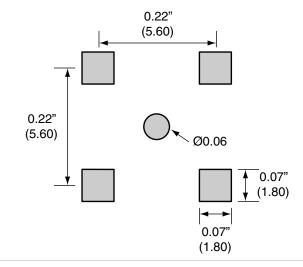



- 1. ALL DIMENSIONS ARE IN INCHES [mm].
- 2. DIMENSIONS APPLY AFTER FINISHING.
- 3. MANUFACTURE TO BE COMPLIANT WITH EU ROHS DIRECTIVE.
- 4. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.

THAT IS THE SOL TREATED AS SU	DRAWING CONTAINS PROPRIE E PROPERTY OF CONNECTOR C CH. NO DISCLOSURE OR REPRO	ITY, AND SHALL BE	-		RT LANE OR 97532
DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF CONNECTOR CITY OR ITS DESIGNATED AGENTS.			SMA FEMALE PCB MOUNT,		
MATERIAL:	TOLERANCES: .020 [0.50]-200 [5.00]= ±.0 .200 [5.00]-1.200 [30.00]= ±. 1.20 [30.0]-4.75 [120.0]= ±. 4.75 [120.0]-12.40 [315.0]=	.016 [0.40]	。SIZE DV	SURFACE MOUNT	, REV
FINISH:	DRAWN: CJ	DT: 9/25/09		CONSMA001-SMD (Gold finish CONSMA001-SMD-N (Nickel fi	
	ENGR:	DT:	SCALE: 2:	1 DO NOT SCALE DRAWING	SHEET 1 OF