

ISSUE 1; October 2015

Description

- Please note: This document is intended to illustrate the general capability and versatility of IQD's design. For specific enquiries please contact one of IQD's sales offices where we can tailor a unique specification to meet your needs. Wide pulling ranges available. Complementary output. Enable/Disable function.

Frequency Parameters

- Frequency: 1.0MHz to 800.0MHz
- Frequency Stability: $\pm 15.00\text{ppm}$ to $\pm 100.00\text{ppm}$
- Nominal Frequency (f_0) reference:
Temperature = $25^\circ\text{C} \pm 3^\circ\text{C}$
Control Voltage = mid point
- Ageing (typical): $\pm 3\text{ppm}$ per year

Electrical Parameters

- Supply Voltage: Available in 5.0V and 3.3V (Lower than 3.3V is available on request)
- Typical Supply Current Draw:
24.0MHz <25mA
800.0MHz <100mA

Frequency Adjustment

- Pulling: ± 50 or ± 100 or $\pm 150\text{ppm}$

Operating Temperature Ranges

- 10 to 60°C
- 20 to 70°C
- 40 to 85°C

Output Details

- Output Compatibility: LVDS
- Output Levels:
VoH 1.43V min
VoL 1.1V max

Output Control

- Enable/Disable Operation:
Logic '0' or no connection to pad 2 enables the oscillator output
Logic '1' to pad 2 disables the oscillator output
Or No connection


Noise Parameters

- Phase Jitter (RMS): 12kHz to 20MHz: 1.0ps max

Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Shock: MIL-STD-883C, Method 2002, Condition B
- Vibration: MIL-STD-883C, Method 2007, Condition A

Outline (mm)

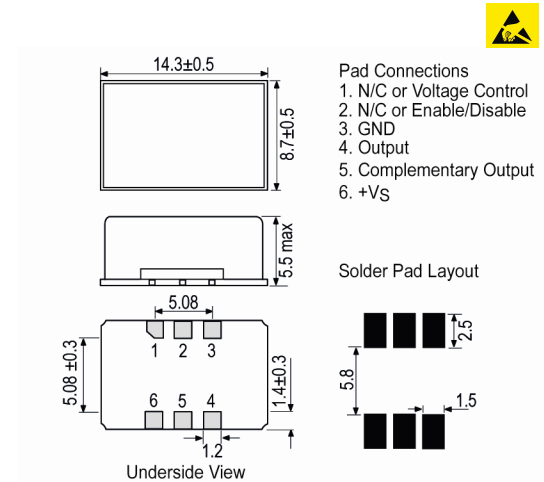

Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: 0800 1808 443

France: 0800 901 383

USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com

Ordering Information

- Minimum data needed to open an enquiry:-
Frequency
Model
Frequency Stability (over operating temperature range)
Operating Temperature Range
Pullability

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): 1

Packaging Details

- Pack Style: Bulk Supplied tube or box packaging
Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 600

Electrical Specification - maximum limiting values

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise & Fall (20 to 80%)	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	800.0MHz	-10 to 60	±15.0	-	1	45/55
		-20 to 70	±20.0	-	1	45/55
		-40 to 85	±30.0	-	1	45/55

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com