



YENYO

US2A THRU US2M

Surface Mount Ultra Fast Recovery Rectifier

Features


- * Fast switching for high efficiency
- * Low forward voltage drop
- * High current capability
- * Low reverse leakage current
- * High surge current capability
- * Glass passivated chip

Mechanical Data

- * Case: Molded plastic SMB/DO-214AA
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solderable per MIL-STD-750 method 2026
- * Polarity: Color band denotes cathode
- * Mounting position: Any
- * Weight: 0.093 gram

**Voltage Range 50 to 1000 V
Current 2.0 Ampere**

SMB/DO-214AA

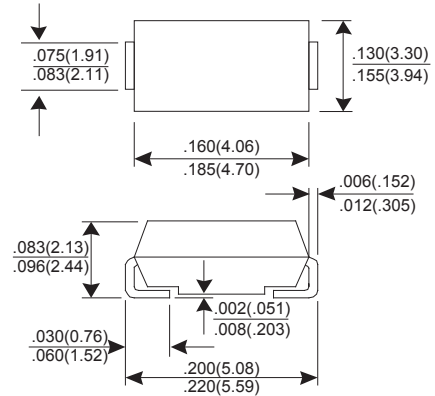

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMTER	SYMBOL	US2A	US2B	US2D	US2G	US2J	US2K	US2M	UNIT	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current TA=90°C	IF(AV)	2.0							A	
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	60							A	
Maximum Instantaneous Forward Voltage @ 2.0 A	VF	1.0		1.3		1.7		V		
Maximum DC Reverse Current @TJ=25°C At Rated DC Blocking Voltage @TJ=125°C	IR	5.0				100				uA
Maximum Reverse Recovery Time (Note 1)	Trr	50				75				nS
Typical junction Capacitance (Note 2)	CJ	50							pF	
Maximum Thermal Resistance (Note 3)	RθJA	55							°CW	
Operating Junction and Storage Temperature Range	TJ, TSTG	-55 to +150							°C	

NOTES : (1) Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.
 (2) Thermal Resistance junction to ambient.
 (3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

RATINGS AND CHARACTERISTIC CURVES US2A THRU US2M

FIG.1 - FORWARD CURRENT DERATING CURVE

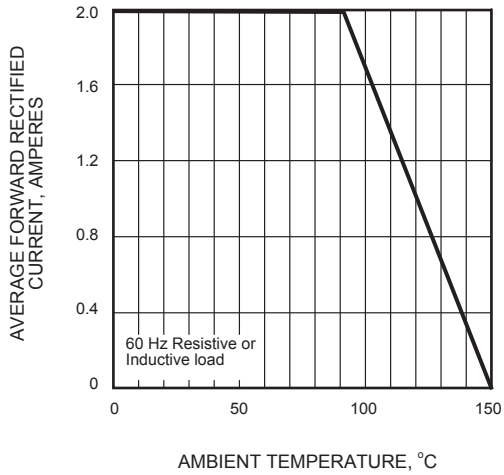


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

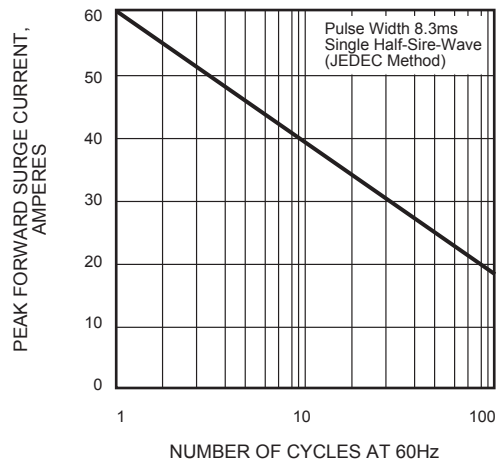


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

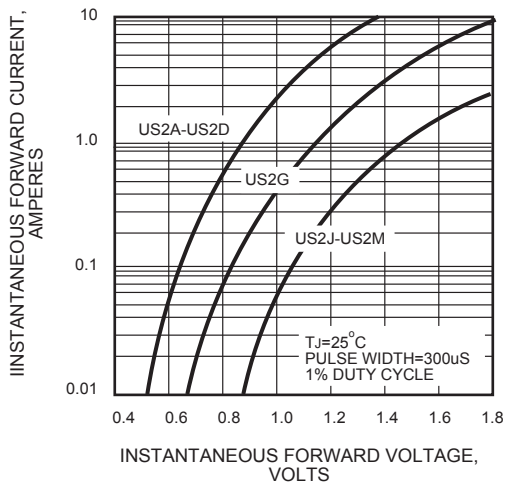


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

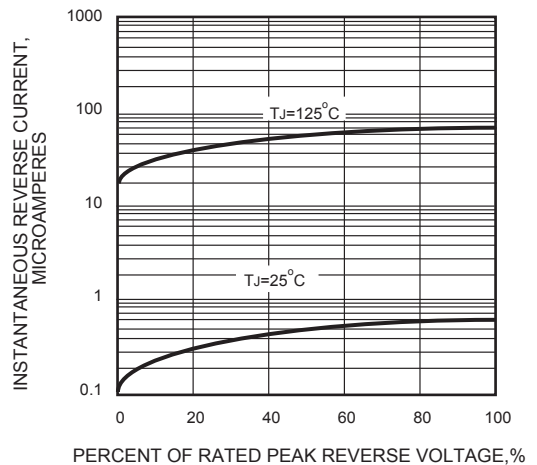


FIG.5 - TYPICAL JUNCTION CAPACITANCE

